

AS-i Compact Module K60 digital A/B device, 8 DI, IP67, 8 x input, maximum 200 mA 8 x M12 socket Y-II assignment mounting plate 3RK1901-0CA00 must be ordered separately

General technical data	
design of the product	digital I/O modules for operation in the field, IP67 - K60
Type	8 inputs
design of the slave type	A/B slave
I/O configuration	0
ID/ID2 code	A/E
Number I/O sockets	8
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing	front addressing socket
Delivery note	the modules are delivered without mounting plate
note	module requires two addresses
Sensor supply	
type of voltage supply for sensor supply	using AS-Interface
input voltage	20 ... 30 V
property of the sensor supply short-circuit and overload resistant	Yes
ampacity of the sensor supply for all inputs	
• at ambient temperature 40 °C	200 mA
Inputs	
number of digital inputs	8
type of connection technology	2- and 3-wire technology
Input circuit	PNP transistor
type of voltage of the input voltages	DC
Inputs switching level High min	10 V
input current at digital input	
• for signal <1> minimum	6 mA
• with signal <0> maximum	1.5 mA
Inputs	
• sensor supply using AS-Interface	short-circuit and overload resistant
• socket assignment	
— PIN 1	sensor supply L+
— PIN 2	data input II
— PIN 3	sensor supply L-
— PIN 4	data input I
— PIN 5	ground terminal
design of the pin assignment of the inputs	Y-II assignment
Outputs	

number of digital outputs	0
Outputs external power supply 24 V DC	not required
Outputs	
• watchdog	not required

Assignment of the data bits

Assignment of data bits	
• socket	PIN 4 = IN1 (D0) (addr. 1), PIN 2 = IN2 (D1) (addr. 1)
• socket 2	PIN 4 = IN2 (D1) (addr. 1)
• socket 3	PIN 4 = IN3 (D2) , PIN 2 = IN4 (D3)
• socket 4	PIN 4 = IN4 (D3) (addr. 1)
• socket 5	PIN 4 = IN1 (D0) (addr. 2), PIN 2 = IN2 (D1) (addr. 2)
• socket 6	PIN4 = IN2 (D1) (addr. 2)
• socket 7	PIN4 = IN3 (D2) (addr. 2), PIN2 = IN4 (D3) (addr. 2)
• socket 8	PIN4 = IN4 (D3) (addr. 2)

Ambient conditions

ambient temperature	
• during operation	-25 ... +85 °C
• during storage	-40 ... +85 °C
protection class IP	IP67

Display

Status display	
• display of I/Os	yellow LED
• display of Uaux	not required
• display of AS-Interface/diagnostics	green/red LED

Mechanical data

width	60 mm
height	152 mm
depth	29 mm
fastening method	standard rail mounting/wall mounting using mounting plate for K60 compact module
shock resistance	15g / 11 ms

Certificates/ approvals

General Product Approval	EMV	Maritime application
--------------------------	-----	----------------------



Maritime application	other	Environment
----------------------	-------	-------------



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

Industrial Communication



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2200-0DQ00-0AA3>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2200-0DQ00-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK2200-0DQ00-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2200-0DQ00-0AA3&lang=en

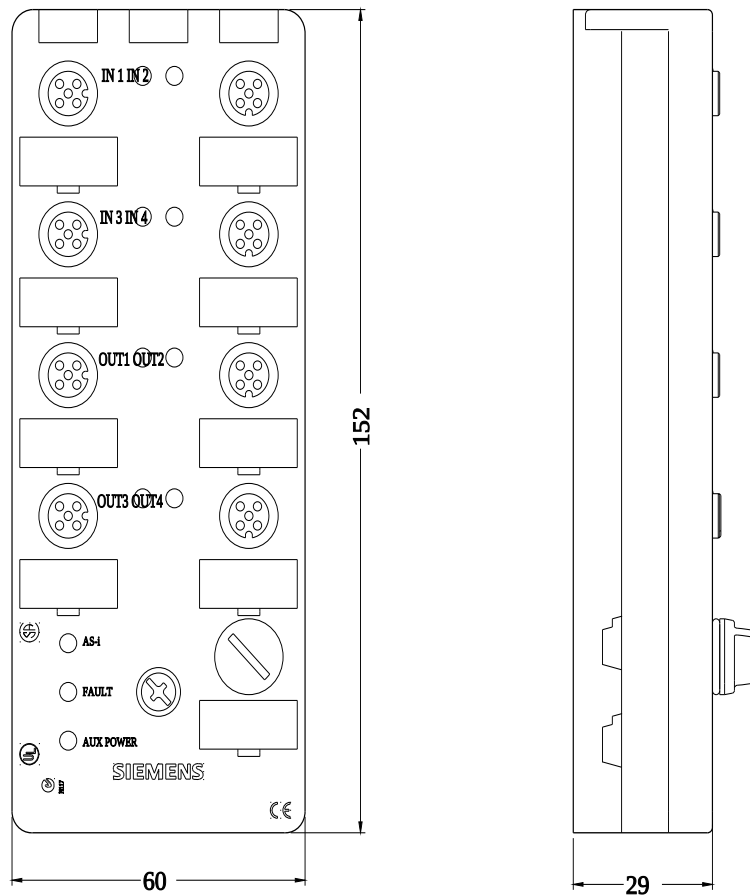

last modified:

4/1/2025 