



Communication module PROFINET for SIRIUS soft starter 3RW44 required product version 3RW44 >= *12*. implemented for starters 3RW44 from delivery date June 2013

product brand name	SIRIUS
product category	Communication modules
product designation	Communication module
design of the product	For 3RW44 soft starter integration in the PROFINET network, suitable for devices with firmware version E12 or higher
Substance Prohibitance (Date)	11/13/2013
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 2,2',6,6'-Tetrabrom-4,4'-isopropylidendi - 79-94-7

Installation/ mounting/ dimensions	
height	117.3 mm
width	36.6 mm
depth	111 mm
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals
General Product Approval



[Confirmation](#)



EMV	Test Certificates	Marine / Shipping	other
	KC	Special Test Certificate	Confirmation



Industrial Communication

[PROFINET](#)

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4900-0NC00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4900-0NC00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0NC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4900-0NC00&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0NC00/char>

Characteristic: Installation altitude



<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW4900-0NC00&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

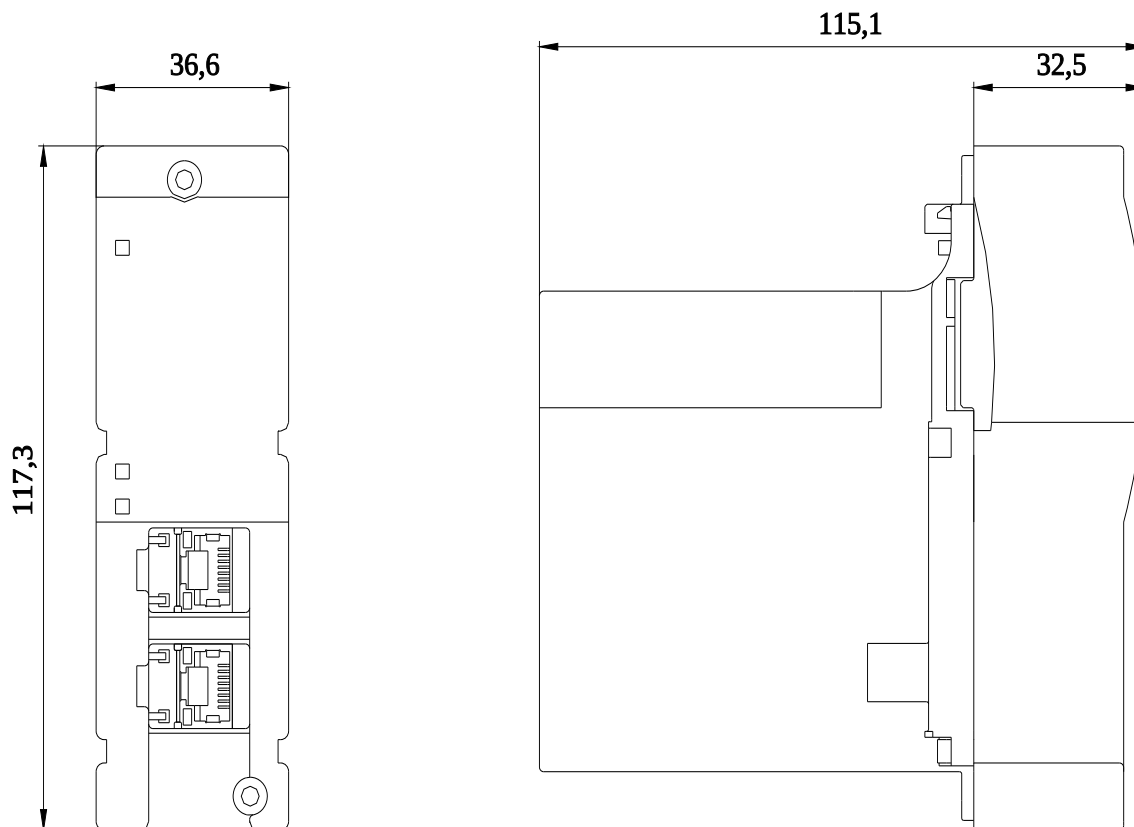

-A1

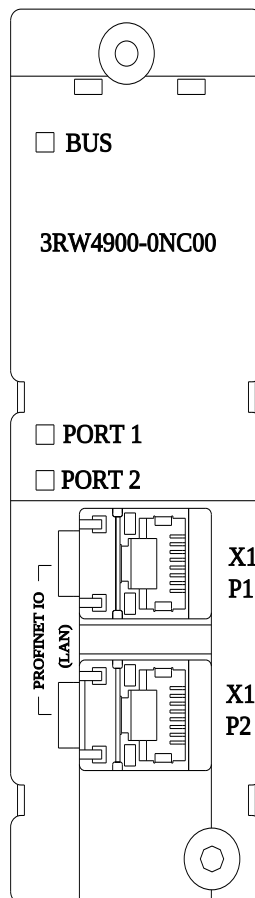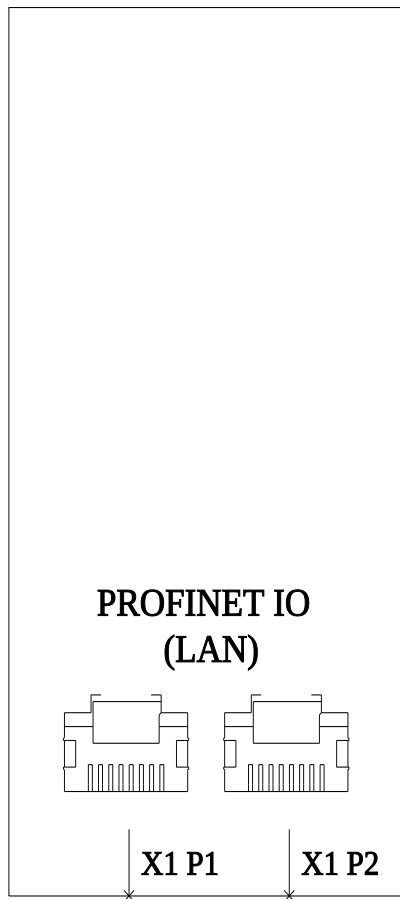

last modified:

9/1/2023 

