

**Siemens**  
**EcoTech**



circuit breaker 3VA2 IEC Frame 160 breaking capacity class L Icu=150 kA @ 415 V 3-pole, line protection ETU560, LSIG, In=100 A overload protection Ir=40 A...100 A short-circuit protection Isd=0.6..10x In, Ii=1.5..12x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit



| Model                                                                                                 |                                         |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------|
| product brand name                                                                                    | SENTRON                                 |
| product designation                                                                                   | Molded case circuit breaker             |
| design of the product                                                                                 | Line protection                         |
| design of the overcurrent release                                                                     | ETU560                                  |
| protection function of the overcurrent release                                                        | LSIG                                    |
| number of poles                                                                                       | 3                                       |
| General technical data                                                                                |                                         |
| insulation voltage / rated value                                                                      | 800 V                                   |
| operating voltage / at AC / rated value                                                               | 690 V                                   |
| power loss [W] / maximum                                                                              | 7.7 W                                   |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole           | 2.57 W                                  |
| mechanical service life (operating cycles) / typical                                                  | 25 000                                  |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V                                      | 14 000                                  |
| electrical endurance (operating cycles) / at AC-1 / at 690 V                                          | 9 800                                   |
| product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof | Yes                                     |
| ground-fault monitoring version                                                                       | Summation current formation L-conductor |
| product function                                                                                      |                                         |
| • communication function                                                                              | Yes                                     |
| • other measurement function                                                                          | No                                      |
| Net Weight                                                                                            | 2.5 kg                                  |
| Current                                                                                               |                                         |
| operational current                                                                                   |                                         |
| • at 40 °C                                                                                            | 100 A                                   |
| • at 45 °C                                                                                            | 100 A                                   |
| • at 50 °C                                                                                            | 100 A                                   |
| • at 55 °C                                                                                            | 100 A                                   |
| • at 60 °C                                                                                            | 100 A                                   |
| • at 65 °C                                                                                            | 100 A                                   |
| • at 70 °C                                                                                            | 100 A                                   |
| Switching capacity according to IEC 60947                                                             |                                         |
| switching capacity class of the circuit breaker                                                       | L                                       |
| maximum short-circuit current breaking capacity (Icu)                                                 |                                         |
| • at 240 V                                                                                            | 200 kA                                  |
| • at 415 V                                                                                            | 150 kA                                  |
| • at 440 V                                                                                            | 150 kA                                  |

|                                                                                                                                              |                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 500 V</li> <li>• at 690 V</li> </ul>                                                             | 100 kA                                          |
| operating short-circuit current breaking capacity (Ics)                                                                                      | 25 kA                                           |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 200 kA<br>150 kA<br>150 kA<br>100 kA<br>18 kA   |
| short-circuit current making capacity (Icm)                                                                                                  |                                                 |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 440 kA<br>330 kA<br>330 kA<br>220 kA<br>52.5 kA |

#### Adjustable parameters

|                                                                                               |                             |
|-----------------------------------------------------------------------------------------------|-----------------------------|
| product feature / for L-tripping / can be switched on/off                                     | No                          |
| adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic      |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 40 A<br>100 A               |
| adjustable response value delay time (tr) / for L-tripping / with I2t characteristic          |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 0.5 s<br>25 s               |
| adjustable response value setting current (Isd) / of S-trip / with I0t characteristic         |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 60 A<br>1 000 A             |
| adjustable response value setting current (Isd) / of S-trip / with I2t characteristic         |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 60 A<br>1 000 A             |
| adjustable response value delay time (tsd) / for S-tripping / with I0t characteristic         |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 0.05 s<br>0.5 s             |
| adjustable response value delay time (tsd) / for S-tripping / with I2t characteristic         |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 0.05 s<br>0.5 s             |
| adjustable response value setting current (Ii) / for I-tripping                               |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 150 A<br>1 200 A            |
| adjustable current response value current / for G-tripping / with standard characteristic     |                             |
| <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul> | 20 A<br>100 A               |
| adjustable response value delay time (tg) / for G-tripping / with I0t characteristic          |                             |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul>                                   | 0.8 s                       |
| adjustable response value setting current (Ig) / for G-tripping / with I2t characteristic     |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 20 A<br>100 A               |
| adjustable response value delay time (tg) / for G-tripping / with I2t characteristic          |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 0.05 s<br>0.8 s             |
| adjustable setting current (InN) / for N-tripping                                             |                             |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                | 20 A<br>160 A               |
| design of the N-conductor protection                                                          | adjustable OFF; 20% to 160% |
| product function / grounding protection                                                       | Yes                         |

#### Mechanical Design

|                                                                                           |                              |
|-------------------------------------------------------------------------------------------|------------------------------|
| product component                                                                         |                              |
| • undervoltage release                                                                    | No                           |
| • voltage trigger                                                                         | No                           |
| • trip indicator                                                                          | No                           |
| height [in]                                                                               | 7.13 in                      |
| height                                                                                    | 181 mm                       |
| width [in]                                                                                | 4.13 in                      |
| width                                                                                     | 105 mm                       |
| depth [in]                                                                                | 3.39 in                      |
| depth                                                                                     | 86 mm                        |
| <b>Connections</b>                                                                        |                              |
| arrangement of electrical connectors / for main current circuit                           | Front terminal               |
| type of electrical connection / for main current circuit                                  | on both sides nut keeper kit |
| type of connectable conductor cross-sections / for flat-bar terminal connection / minimum | 13 x 1 mm                    |
| type of connectable conductor cross-sections / for flat-bar terminal connection / maximum | 25 x 8 mm                    |
| design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)        | tin                          |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)     | tin                          |
| <b>Auxiliary circuit</b>                                                                  |                              |
| number of CO contacts / for auxiliary contacts                                            | 0                            |
| <b>Accessories</b>                                                                        |                              |
| product extension / optional / motor drive                                                | Yes                          |
| <b>Environmental conditions</b>                                                           |                              |
| protection class IP / on the front                                                        | IP40                         |
| ambient temperature                                                                       |                              |
| • during operation / minimum                                                              | -25 °C                       |
| • during operation / maximum                                                              | 70 °C                        |
| • during storage / minimum                                                                | -40 °C                       |
| • during storage / maximum                                                                | 80 °C                        |
| <b>Environmental footprint</b>                                                            |                              |
| Global Warming Potential [CO2 eq] / total                                                 | 61.814 kg                    |
| Global Warming Potential [CO2 eq] / during manufacturing                                  | 14.6 kg                      |
| Global Warming Potential [CO2 eq] / during operation                                      | 48.9 kg                      |
| Global Warming Potential [CO2 eq] / after end of life                                     | -2.2 kg                      |
| Siemens Eco Profile (SEP)                                                                 | Siemens EcoTech              |
| reference code / according to IEC 81346-2                                                 | Q                            |
| <b>Approvals / Certificates</b>                                                           |                              |
| <b>General Product Approval</b>                                                           |                              |



[Confirmation](#)



[Miscellaneous](#)

|                          |     |                   |                   |
|--------------------------|-----|-------------------|-------------------|
| General Product Approval | EMV | Test Certificates | Marine / Shipping |
|--------------------------|-----|-------------------|-------------------|



[Special Test Certificate](#)

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[CCS \(China Classification Society\)](#)

[Miscellaneous](#)

|       |                 |             |
|-------|-----------------|-------------|
| other | Dangerous goods | Environment |
|-------|-----------------|-------------|

[Confirmation](#)

[Miscellaneous](#)

[Transport Information](#)



Siemens  
EcoTech



[Environmental Con-  
firmations](#)

## Environment

[Environmental Con-  
firmations](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2110-8JQ32-0AA0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2110-8JQ32-0AA0>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2110-8JQ32-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2110-8JQ32-0AA0)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

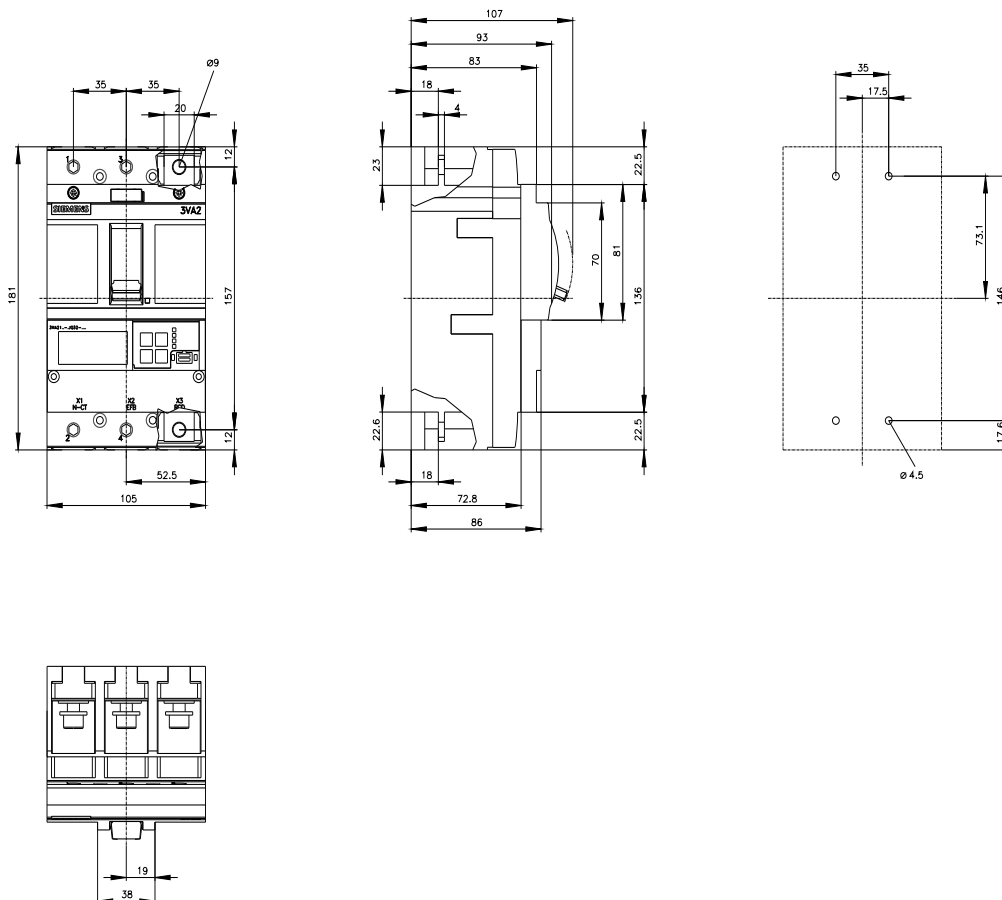



last modified:

10/24/2024

