



AS-i compact module K20 digital A/B slave, 2 DI/2 DQ, IP67 2 x input, maximum 150 mA 2 x output, 1 A 24 V DC max. 1 A for all outputs 2 x M12 sockets with Y assignment

General technical data	
design of the product	digital I/O modules for operation in the field, IP67 - K20
Type	2 outputs / 2 inputs
design of the slave type	A/B slave
I/O configuration	B
ID/ID2 code	A/2
Number I/O sockets	2
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	not available
Addressing	using M12 female connector
AS interface Connection Polarity reversal protection	built-in
Note 1	An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.
Sensor supply	
type of voltage supply for sensor supply	using AS-Interface
input voltage	16.5 ... 30 V
property of the sensor supply short-circuit and overload resistant	Yes
ampacity of the sensor supply for all inputs	
• at ambient temperature 40 °C	150 mA
• at ambient temperature 55 °C	70 mA
Inputs	
number of digital inputs	2
type of connection technology	2- and 3-wire technology
Input circuit	PNP transistor
type of voltage of the input voltages	DC
Inputs switching level High min	10 V
input current at digital input	
• for signal <1> minimum	6 mA
• with signal <0> maximum	1.5 mA
Inputs sensor supply using AS-Interface	short-circuit and overload resistant
Inputs socket assignment	
• PIN 1	sensor supply L+
• PIN 2	data input 2
• PIN 3	sensor supply L-
• PIN 4	data input 1
design of the pin assignment of the inputs	Y assignment
Outputs	

number of digital outputs	2
type of voltage of output voltages	DC
Outputs external power supply 24 V DC	shared round cable connection with AS-Interface connection through M12 female connector
ampacity of the semiconductor output at DC-13 at 24 V	1 A
Outputs aggregate current • max	1 A
type of switching output	PNP transistor
design of the pin assignment of the outputs	Y assignment
Outputs socket assignment	2 = output 2, 3 = "-", 4 = output 1
property of the output short-circuit proof	Yes
Outputs • short-circuit protection • induction protection • watchdog	built-in built-in built-in

Display

Status display • display of I/Os • display of Uaux • display of AS-Interface/diagnostics	yellow LED green LED green/red dual LED
--	---

Assignment of the data bits

Assignment of data bits • socket • socket 2 • socket 3 • socket 4	PIN 4 = IN3 (D2), PIN 2 = IN4 (D3) PIN 4 = OUT1 (D0), PIN 2 = OUT2 (D1) not available not available
--	--

Ambient conditions

ambient temperature • during operation • during storage	-25 ... +70 °C -40 ... +85 °C
protection class IP	IP67

Mechanical data

width	20 mm
height	108 mm
depth	45 mm
fastening method	no mounting plate required
shock resistance	15g / 11 ms

Certificates/ approvals

General Product Approval	EMV
--------------------------	-----

[Confirmation](#)



EMV	Test Certificates	Marine / Shipping	other
-----	-------------------	-------------------	-------

[KC](#)

[Special Test Certificate](#)



[Confirmation](#)

other	Environment	Industrial Communication
-------	-------------	--------------------------

[Miscellaneous](#)

[Environmental Confirmations](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2400-1BQ30-0AA3>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2400-1BQ30-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK2400-1BQ30-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2400-1BQ30-0AA3&lang=en

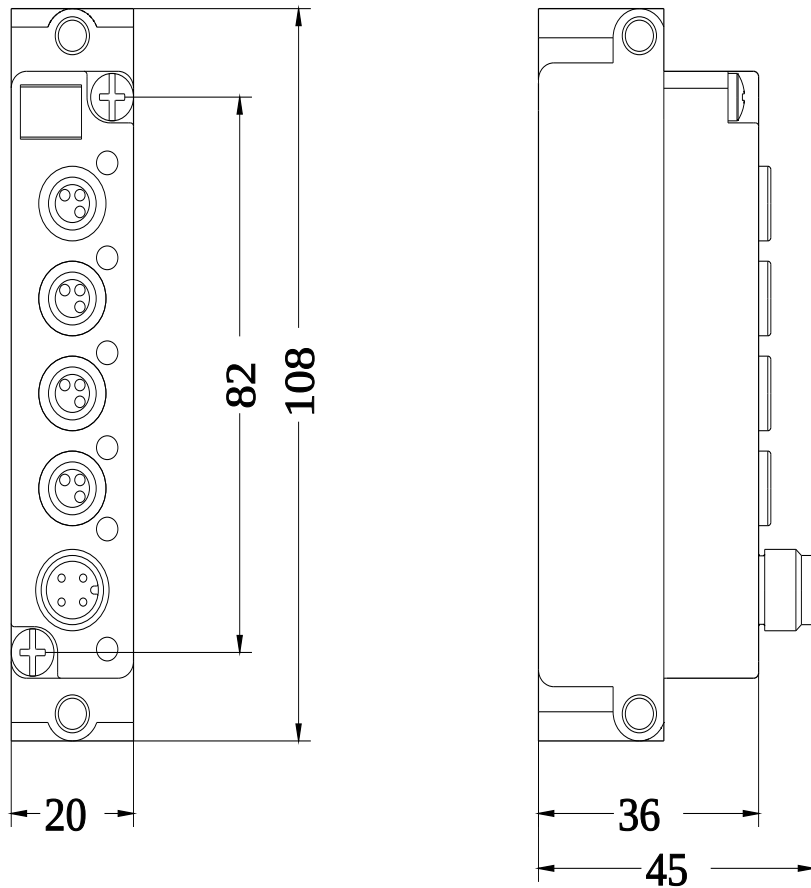

last modified:

4/23/2024 