

Siemens
EcoTech



circuit breaker 3VA2 IEC Frame 400 breaking capacity class M Icu=55 kA @ 415 V
4-pole, line protection ETU350, LSI, In=400 A overload protection Ir=160 A...400 A
short-circuit protection I_{sd}=1.5...10 x I_r, I_i=10 x I_n neutral conductor protection
adjustable (OFF, 50%, 100%) nut keeper kit



Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	ETU350
protection function of the overcurrent release	LSI
number of poles	4
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	96 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	32 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	6 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	4 200
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
• communication function	No
• other measurement function	No
Net Weight	5.983 kg
Current	
operational current	
• at 40 °C	400 A
• at 45 °C	400 A
• at 50 °C	400 A
• at 55 °C	385 A
• at 60 °C	370 A
• at 65 °C	355 A
• at 70 °C	340 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	M
maximum short-circuit current breaking capacity (I _{cu})	
• at 240 V	85 kA
• at 415 V	55 kA
• at 440 V	55 kA

• at 500 V • at 690 V	36 kA 5 kA
operating short-circuit current breaking capacity (Ics) • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	85 kA 55 kA 55 kA 36 kA 5 kA
short-circuit current making capacity (Icm) • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	187 kA 121 kA 121 kA 75.6 kA 7.5 kA

Adjustable parameters

product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic • minimum • maximum	160 A 400 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic • minimum • maximum	0.5 s 17 s
adjustable response value setting current (Isd) / of S-trip / with I2t characteristic • minimum • maximum	600 A 4 000 A
adjustable response value delay time (tsd) / for S-tripping / with I2t characteristic • minimum • maximum	0.02 s 0.4 s
adjustable response value setting current (Ii) / for I-tripping • minimum • maximum	4 000 A 4 000 A
adjustable setting current (InN) / for N-tripping • minimum • maximum	200 A 400 A
design of the N-conductor protection	adjustable OFF; 50%; 100%
product function / grounding protection	No

Mechanical Design

product component • undervoltage release • voltage trigger • trip indicator	No No No
height [in]	9.76 in
height	248 mm
width [in]	7.24 in
width	184 mm
depth [in]	4.33 in
depth	110 mm

Connections

arrangement of electrical connectors / for main current circuit	Front terminal
type of electrical connection / for main current circuit	on both sides nut keeper kit
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	20 x 1 mm
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	35 x 10 mm
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	silver
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	silver

Auxiliary circuit

number of CO contacts / for auxiliary contacts	0
Accessories	
product extension / optional / motor drive	Yes
Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C
Environmental footprint	
Global Warming Potential [CO2 eq] / total	495 kg
Global Warming Potential [CO2 eq] / during manufacturing	28.7 kg
Global Warming Potential [CO2 eq] / during operation	470 kg
Global Warming Potential [CO2 eq] / after end of life	-4.07 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
reference code / according to IEC 81346-2	Q
Approvals / Certificates	
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)

General Product Approval	EMV	Test Certificates			Marine / Shipping
		Type Test Certificates/Test Report	Special Test Certificate	Miscellaneous	

Marine / Shipping	other				
				CCS (China Classification Society)	Miscellaneous

other	Dangerous goods	Environment			
Confirmation	Miscellaneous	Transport Information	Environmental Confirmations		

Environment
Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2340-5HN42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2340-5HN42-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2340-5HN42-0AA0


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

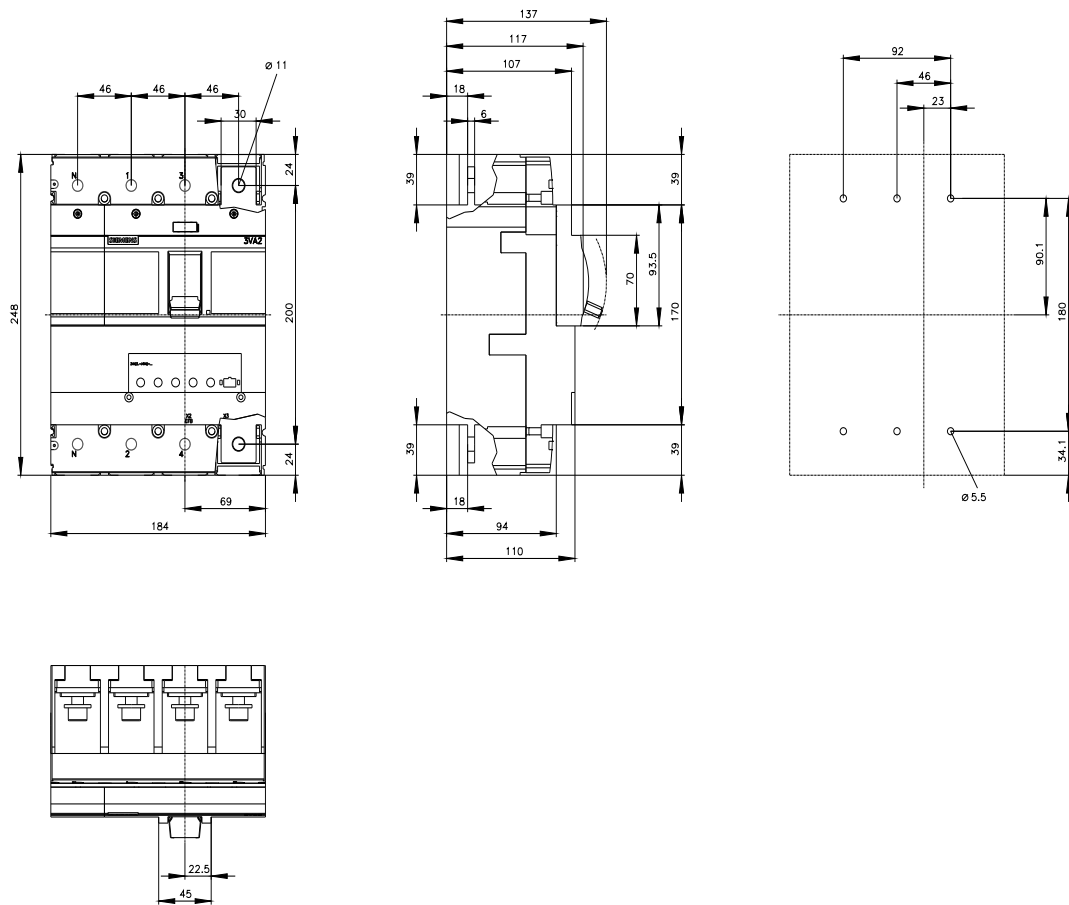

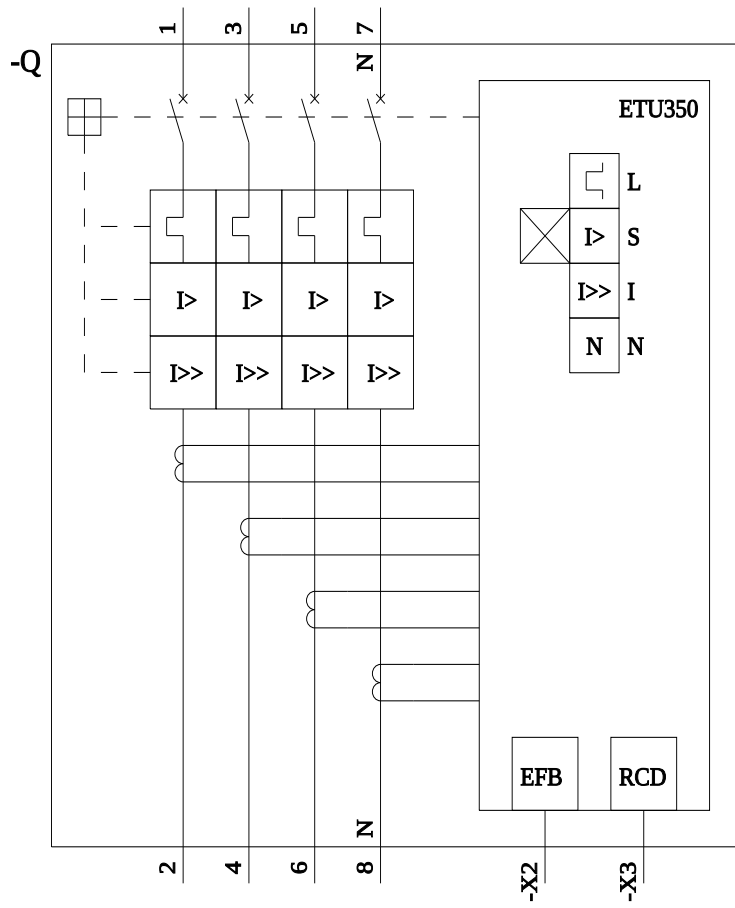

last modified:

10/24/2024

