



Accessory 3WA/3WL Undervoltage release (UVR) Instantaneous (0,08 s) and short-delay (0,2 s), 380-415 V AC,

| Model                                         |                                                                                                                |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| product brand name                            | SETRON                                                                                                         |
| product designation                           | Undervoltage release                                                                                           |
| design of the product                         | undervoltage release (UVR), instantaneous (0.08 s) and short-time delayed (0.2 s), 380 to 415 V AC             |
| design of the fuse link                       | fuse gG: 2 A, miniature circuit breaker C characteristic: 6 A, miniature circuit breaker D characteristic: 4 A |
| closing apparent power [VA]                   | 60 VA                                                                                                          |
| operating apparent power [VA]                 | 5 VA                                                                                                           |
| closing active power [W]                      | 50 W                                                                                                           |
| operating active power [W]                    | 5 W                                                                                                            |
| OFF-delay time minimum                        | 80 ms                                                                                                          |
| OFF-delay time maximum                        | 200 ms                                                                                                         |
| control supply voltage (Us) at AC rated value | 380 to 415 V 50/60Hz                                                                                           |
| ambient temperature during operation          | <ul style="list-style-type: none"><li>• minimum -40 °C</li><li>• maximum 70 °C</li></ul>                       |
| ambient temperature during storage            | <ul style="list-style-type: none"><li>• minimum -40 °C</li><li>• maximum 80 °C</li></ul>                       |

| Approvals Certificates   |                   |
|--------------------------|-------------------|
| General Product Approval | Test Certificates |



[Confirmation](#)



[Special Test Certificate](#)

|                   |       |                 |
|-------------------|-------|-----------------|
| Marine / Shipping | other | Dangerous goods |
|-------------------|-------|-----------------|



[Confirmation](#)

[Dangerous goods information](#)

Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AE07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AE07>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA9111-0AE07](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AE07)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

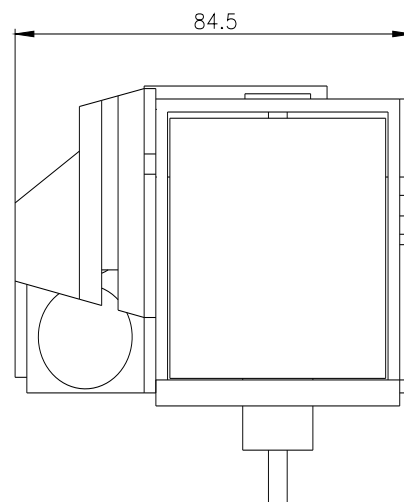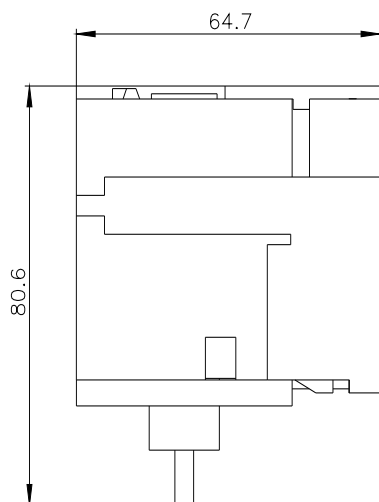

---

last modified:

9/9/2024 

