



shunt trip left 24 V AC 50/60 Hz / 24-30 V DC accessory for: 3VA1 and 3VA20-26

Model			
product brand name	SENTRON		
product designation	Auxiliary release		
accessories	Auxiliary release		
General technical data			
degree of pollution	3		
overvoltage category	III		
apparent power consumption / maximum	30 VA		
consumed active power / at DC / maximum	45 W		
Voltage			
surge voltage resistance	4 kV		
Mechanical Design			
height	65.1 mm		
width	25.7 mm		
number of slots	3		
depth	31.2 mm		
net weight	91 g		
tightening torque / with screw-type terminals / minimum	0.4 N·m		
tightening torque / with screw-type terminals / maximum	0.5 N·m		
Connections according IEC			
stripped length	10 mm		
connectable conductor cross-section • minimum • maximum	0.5 ... 1.5		
AWG number / as coded connectable conductor cross section / for auxiliary contacts • minimum • maximum	20 16		
Connetctions according UL			
stripped length [in]	0.4 in		
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in		
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in		
Certificates			
General Product Approval		EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping

other

Environment



[Confirmation](#)

[Miscellaneous](#)

[Miscellaneous](#)



Environment

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BL30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BL30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BL30

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

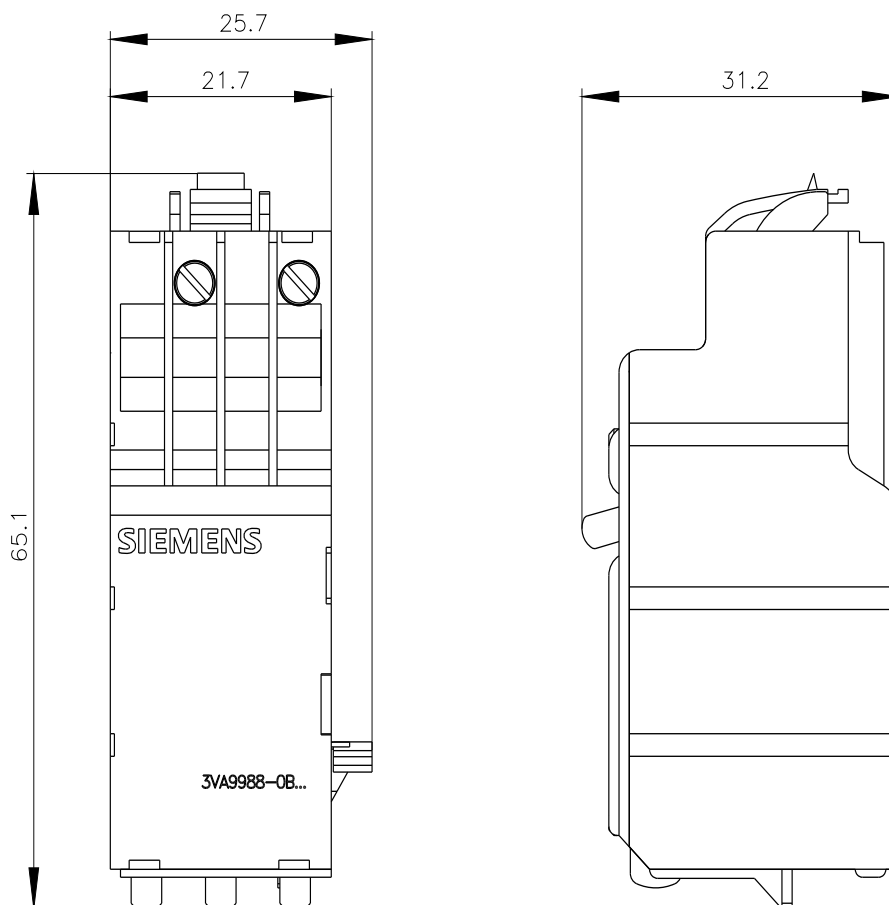



last modified:

5/26/2024 

