

\*\*\*Spare part\*\*\* SIMATIC Flat Panel 15T 15-inch Touch TFT screen with 1024x 768 pixels resolution for 24 V DC VGA, DVI-D interface, incl. VGA cable 1.8 m

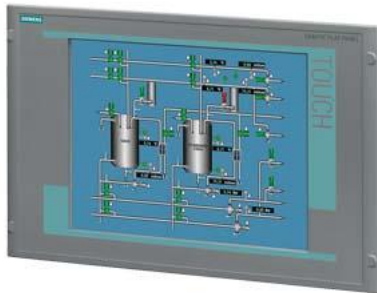


Figure similar

| Display                               |                                 |
|---------------------------------------|---------------------------------|
| Design of display                     | TFT                             |
| Screen diagonal                       | 15 in                           |
| Display width                         | 304.1 mm                        |
| Display height                        | 228.1 mm                        |
| On Screen Display (OSD) configuration | Yes                             |
| Number of colors                      | 16 000 000; 16.2 million        |
| Viewing angle                         | 100° x 90° (min)                |
| Resolution (pixels)                   |                                 |
| • Horizontal image resolution         | 1 024 pixel                     |
| • Vertical image resolution           | 768 pixel                       |
| General features                      |                                 |
| • Brightness/contrast                 | > 260 cd/m <sup>2</sup> / 350:1 |
| Control elements                      |                                 |
| Input device                          |                                 |
| • Integrated mouse cursor control     | No                              |
| Touch operation                       |                                 |
| • Design as touch screen              | Yes                             |
| Installation type/mounting            |                                 |
| Front mounting                        | Yes                             |
| VESA mounting                         | No                              |
| Supply voltage                        |                                 |
| Type of supply voltage                | AC/DC                           |
| permissible range, lower limit (DC)   | 19.2 V                          |
| permissible range, upper limit (DC)   | 28.8 V                          |
| permissible range, lower limit (AC)   | 90 V                            |
| permissible range, upper limit (AC)   | 264 V                           |
| Degree and class of protection        |                                 |
| IP (at the front)                     | IP65                            |
| Standards, approvals, certificates    |                                 |
| UL approval                           | Yes                             |
| EAC (formerly Gost-R)                 | No                              |
| Marine approval                       |                                 |
| • Germanischer Lloyd (GL)             | Yes; Optional                   |
| • American Bureau of Shipping (ABS)   | Yes; Optional                   |
| • Bureau Veritas (BV)                 | Yes; Optional                   |
| • Det Norske Veritas (DNV)            | Yes; Optional                   |
| • Lloyds Register of Shipping (LRS)   | Yes; Optional                   |
| Ambient conditions                    |                                 |

#### Ambient temperature during operation

- min. 0 °C
- max. 50 °C

#### Dimensions

|                            |        |
|----------------------------|--------|
| Width of the housing front | 483 mm |
| Height of housing front    | 310 mm |
| Mounting cutout, width     | 450 mm |
| Mounting cutout, height    | 290 mm |
| Overall depth              | 55 mm  |

**last modified:** 12/18/2020 