



SIRIUS safety relay Output expansion 3RO Power, with Relay enabling circuits 3 NO contacts plus Relay signaling circuit 1 NC contact Us = 24 V DC screw terminal

product brand name	SIRIUS
product category	Safety relays
product designation	Output expansion
design of the product	Relay enabling circuits
product type designation	3SK1
<b>Product Function</b>	
product function parameterizable	undelayed/delayed (only with system connector)
suitability for use	
• safety-related circuits	Yes
<b>General technical data</b>	
certificate of suitability UL approval	Yes
power loss [W] maximum	5.5 W
insulation voltage rated value	300 V
degree of pollution	3
overvoltage category	3
surge voltage resistance rated value	4 000 V
protection class IP of the enclosure	IP20
shock resistance	5 g / 10 ms
vibration resistance according to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
operating frequency maximum	360 1/h
mechanical service life (operating cycles) typical	10 000 000
thermal current of the switching element with contacts maximum	10 A
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	11/05/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	1.058 kg
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	4 000 m; Derating, see Product Notification 109792701
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	900 ... 1 060 hPa
<b>Electromagnetic compatibility</b>	
installation environment regarding EMC	This product is suitable for Class B environments and can also be used in domestic environments.
EMC emitted interference	IEC 60947-5-1, IEC 61000
<b>Safety related data</b>	
stop category according to IEC 60204-1	0

<b>IEC 62061</b>	
SIL Claim Limit (subsystem) according to EN 62061	3
<b>Safety Integrity Level (SIL) according to IEC 62061</b>	SIL 3
<b>PFHD with high demand rate according to IEC 62061</b>	
ISO 13849	1E-9 1/h
category according to EN ISO 13849-1	4
<b>performance level (PL) according to ISO 13849-1</b>	PL e
<b>IEC 61508</b>	
Safety Integrity Level (SIL) according to IEC 61508	3
<b>safety device type according to IEC 61508-2</b>	Type A
<b>Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508</b>	1E-6 1/y
PFDavg with low demand rate according to IEC 61508	1E-6
hardware fault tolerance according to IEC 61508	1
T1 value for proof test interval or service life according to IEC 61508	20 a
<b>Electrical Safety</b>	
<b>touch protection against electrical shock</b>	finger-safe
<b>Short-circuit protection</b>	
design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 16 A or MCB type A: 6 A or MCB type B: 4 A or MCB type C: 4 A
<b>Inputs</b>	
<b>design of input</b>	
• feedback input	No
<b>Outputs</b>	
<b>number of outputs as contact-affected switching element</b>	
• as NC contact	
— for signaling function delayed switching	0
— safety-related instantaneous contact	0
— safety-related delayed switching	0
• as NO contact	
— for signaling function instantaneous contact	0
— for signaling function delayed switching	0
— safety-related instantaneous contact	3
— safety-related delayed switching	0
<b>number of outputs as contact-less semiconductor switching element</b>	
• for signaling function	
— delayed switching	0
<b>switching capacity current of the NO contacts of the relay outputs at DC-13</b>	
• at 24 V	6 A
• at 115 V	1.1 A
• at 230 V	0.55 A
<b>switching capacity current of the NO contacts of the relay outputs at AC-15</b>	
• at 24 V	10 A
• at 115 V	10 A
• at 230 V	10 A
<b>total current maximum</b>	30 A
<b>Times</b>	
<b>make time with automatic start</b>	
• typical	50 ms
• at DC maximum	70 ms
<b>make time with automatic start after power failure</b>	
• typical	50 ms
• maximum	70 ms
<b>backslide delay time in the event of power failure</b>	
• typical	20 ms
• maximum	20 ms
<b>recovery time after power failure typical</b>	0 s
<b>Main circuit</b>	

operational current at 17 V minimum	5 mA
<b>Control circuit/ Control</b>	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
• full-scale value	1.2
<b>Installation/ mounting/ dimensions</b>	
mounting position	on horizontal standard DIN rail
fastening method	screw and snap-on mounting
height	100 mm
width	90 mm
depth	121.6 mm
required spacing	
• with side-by-side mounting at the side	0 mm
• for grounded parts at the side	5 mm
<b>Connections/ Terminals</b>	
type of electrical connection	screw terminal
type of connectable conductor cross-sections	
• solid	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
• finely stranded with core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
• for AWG cables solid	1x (20 ... 12), 2x (20 ... 14)
type of electrical connection plug-in socket	No

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



EMV	Functional Safety	Test Certificates	Marine / Shipping
	<a href="#">Type Examination Certificate</a>	<a href="#">Type Test Certificates/Test Report</a>	
Marine / Shipping	other	Railway	Environment
	<a href="#">Confirmation</a>	<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1213-1AB40>

##### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1213-1AB40>



##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1213-1AB40>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SK1213-1AB40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1213-1AB40&lang=en)

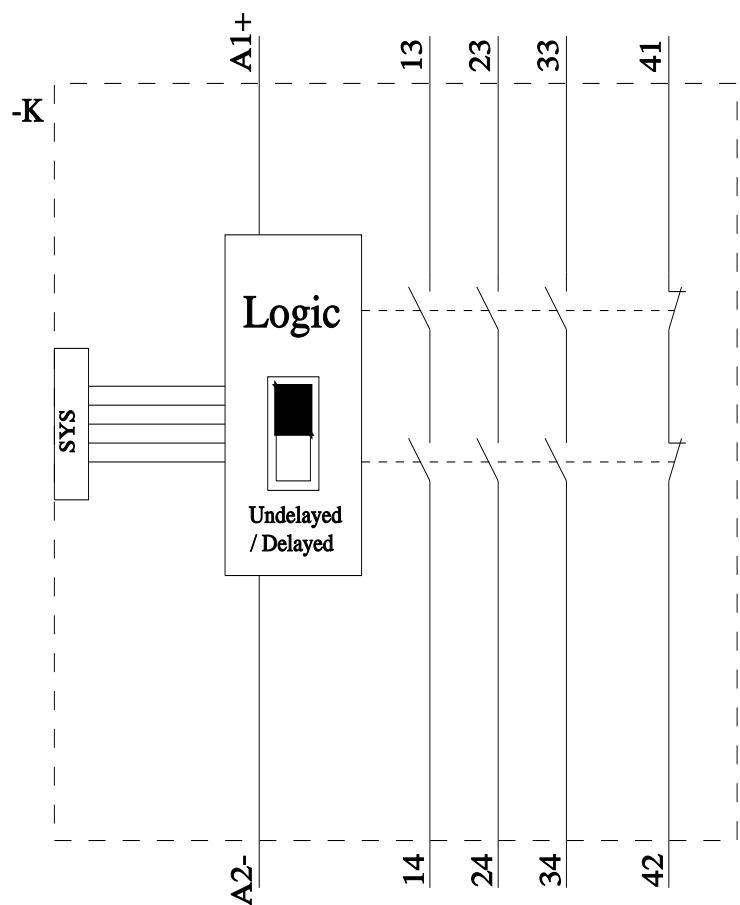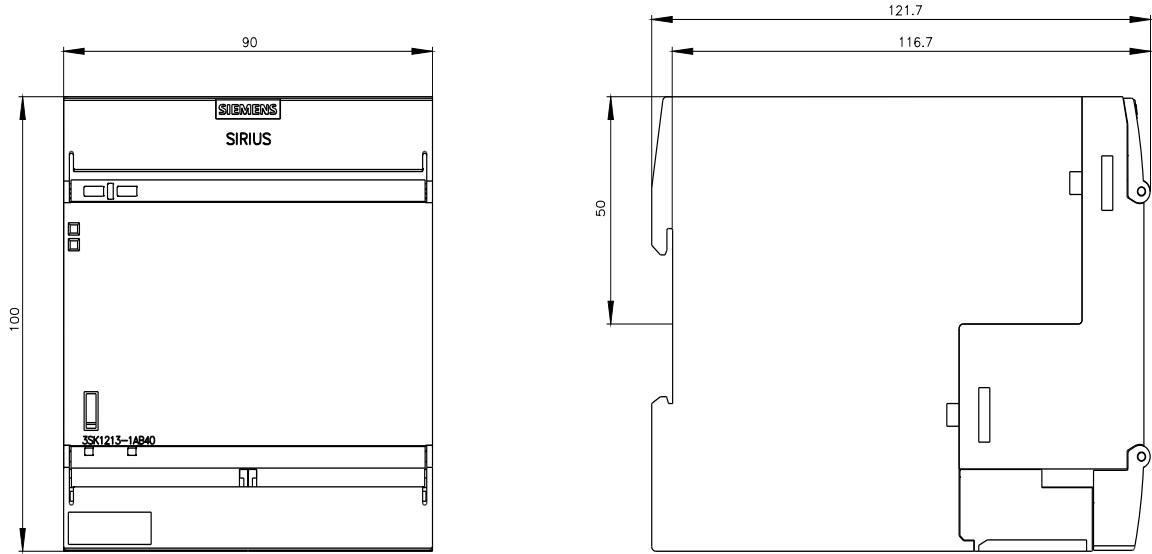

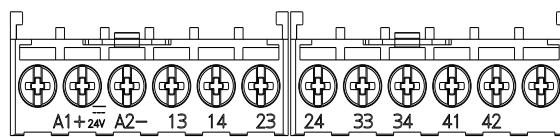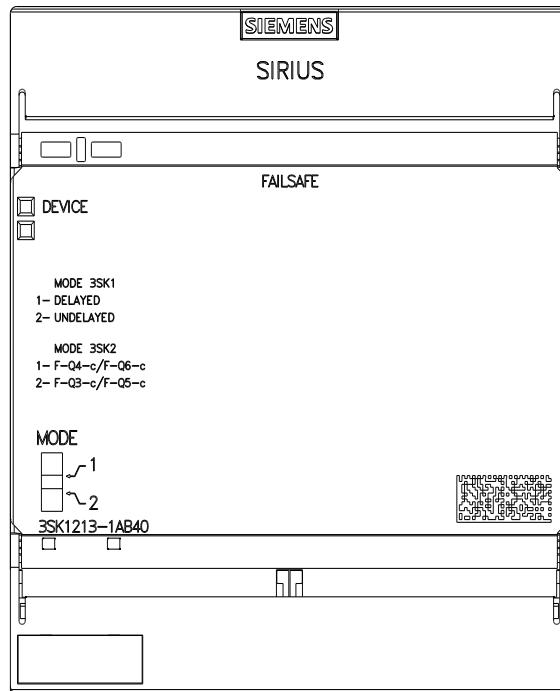

---

last modified:

11/25/2024