

## Data sheet for SINAMICS Power module PM230

Article No. : 6SL3210-1NE15-8AG1

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

[Figure similar](#)



### Rated data

#### Input

|                    |                          |
|--------------------|--------------------------|
| Number of phases   | 3 AC                     |
| Line voltage       | 380 ... 480 V $\pm$ 10 % |
| Line frequency     | 47 ... 63 Hz             |
| Rated current (LO) | 6.10 A                   |
| Rated current (HO) | 4.20 A                   |

#### Output

|                                     |                 |                               |
|-------------------------------------|-----------------|-------------------------------|
| Number of phases                    | 3 AC            |                               |
| <b>Rated voltage</b>                | <b>400V IEC</b> | <b>480V NEC <sup>1)</sup></b> |
| Rated power (LO)                    | 2.20 kW         | 3.00 hp                       |
| Rated power (HO)                    | 1.50 kW         | 2.00 hp                       |
| Rated current (LO)                  | 5.90 A          |                               |
| Rated current (HO)                  | 4.10 A          |                               |
| Max. output current                 | 8.90 A          |                               |
| Pulse frequency                     | 4 kHz           |                               |
| Output frequency for vector control | 0 ... 200 Hz    |                               |
| Output frequency for V/f control    | 0 ... 550 Hz    |                               |

#### Overload capability

|                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low Overload (LO)                                                                                                                                                             |
| 1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s<br>1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s   |
| High Overload (HO)                                                                                                                                                            |
| 1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s<br>2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s |

### General tech. specifications

|                              |         |
|------------------------------|---------|
| Power factor $\lambda$       | 0.90    |
| Offset factor $\cos \varphi$ | 0.95    |
| Efficiency $\eta$            | 0.96    |
| Sound pressure level (1m)    | 50 dB   |
| Power loss                   | 0.08 kW |
| Filter class (integrated)    | Class A |

### Ambient conditions

|                            |                                                    |
|----------------------------|----------------------------------------------------|
| Cooling                    | Internal air cooling                               |
| Cooling air requirement    | 0.005 m <sup>3</sup> /s (0.177 ft <sup>3</sup> /s) |
| Installation altitude      | 1,000 m (3,280.84 ft)                              |
| <b>Ambient temperature</b> |                                                    |
| Operation LO               | -10 ... 40 °C (14 ... 104 °F)                      |
| Operation HO               | -10 ... 50 °C (14 ... 122 °F)                      |
| Transport                  | -40 ... 70 °C (-40 ... 158 °F)                     |
| Storage                    | -40 ... 70 °C (-40 ... 158 °F)                     |

#### Relative humidity

|                |                                     |
|----------------|-------------------------------------|
| Max. operation | 95 % RH, condensation not permitted |
|----------------|-------------------------------------|

### Connections

#### Line side

|                         |                                                      |
|-------------------------|------------------------------------------------------|
| Version                 | Plug-in screw terminals                              |
| Conductor cross-section | 1.50 ... 2.50 mm <sup>2</sup><br>(AWG 16 ... AWG 14) |

#### Motor end

|                         |                                                      |
|-------------------------|------------------------------------------------------|
| Version                 | Plug-in screw terminals                              |
| Conductor cross-section | 1.50 ... 2.50 mm <sup>2</sup><br>(AWG 16 ... AWG 14) |

#### Max. motor cable length

|            |                   |
|------------|-------------------|
| Shielded   | 25 m (82.02 ft)   |
| Unshielded | 100 m (328.08 ft) |

### Mechanical data

|                      |                     |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Frame size           | FSA                 |
| Net weight           | 4.30 kg (9.48 lb)   |

#### Dimensions

|        |                  |
|--------|------------------|
| Width  | 73 mm (2.87 in)  |
| Height | 196 mm (7.72 in) |
| Depth  | 165 mm (6.50 in) |


### Standards

|                           |                                  |
|---------------------------|----------------------------------|
| Compliance with standards | UL, CE, C-Tick (RCM), KCC        |
| CE marking                | Low-voltage directive 2006/95/EC |

Data sheet for SINAMICS Power module PM230

Article No. : 6SL3210-1NE15-8AG1

| Converter losses to IEC61800-9-2*                    |         |
|------------------------------------------------------|---------|
| Efficiency class                                     | IE2     |
| Comparison with the reference converter (90% / 100%) | 28.70 % |

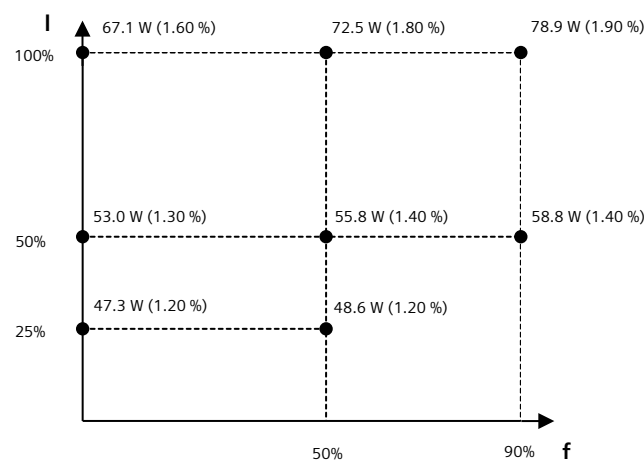

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

<sup>1)</sup> The output current and HP ratings are valid for the voltage range 440V-480V