

MLFB-Ordering data

6SL3511-0PE17-5AM0



Figure similar

Client order no. :

Item no. :

Order no. :

Consignment no. :

Offer no. :

Project :

Remarks :

Rated data		General tech. specifications	
Input		Ambient conditions	
Number of phases	3 AC	Power factor λ	0.70 ... 0.85
Line voltage	380 ... 500 V $\pm 10\%$	Efficiency η	0.95
Line frequency	47 ... 63 Hz	Cooling	Convection
Rated current	2.00 A	Installation altitude	1000 m
Output		Ambient temperature	
Number of phases	3 AC	Operation	-10 ... 40 °C (14 ... 104 °F)
Rated voltage	500 V	Transport	-40 ... 70 °C (-40 ... 158 °F)
Rated power	0.75 kW	Storage	-40 ... 70 °C (-40 ... 158 °F)
Rated current (IN)	2.30 A	Relative humidity	
Max. output current	4.60 A	Operation	
Pulse frequency	4.000	95 % at 40 °C (104 °F); RH, condensation not permitted	
Output frequency for V/f control	0 ... 650 Hz		
Due to legal restrictions a limitation to 550 Hz is under preparation			

Overload capability

High Overload (HO)

Average max. rated output current during a cycle time of 300 s; 1.5 \times rated output current (i.e. 150% overload) for 60 s with a cycle time of 300 s; 2 \times rated output current (i.e. 200% overload) for 3 s with a cycle time of 300 s


MLFB-Ordering data

6SL3511-0PE17-5AM0



Figure similar

Mechanical data		Connections	
Degree of protection	IP65 / UL type 3	Line side	
Frame size	FSA	Version	HAN Q4/2 (connector)
Net weight	6.70 kg	Conductor cross-section	1.50 ... 6.00 mm ²
Width	445.0 mm	Motor end	
Height	210.0 mm	Version	HAN Q8 (socket)
Depth	125.0 mm	Conductor cross-section	1.00 ... 4.00 mm ²
Inputs / outputs		Max. motor cable length	
Standard digital inputs		Shielded	15 m
Number	4	Unshielded	30 m
Analog / digital inputs		Communication	
Number	1	Communication	AS-Interface
PTC/ KTY interface		Closed-loop control techniques	
1 input, connectable sensors: PTC, KTY or Thermo-Click, connection via Power Modules		V/f linear / square-law / parameterizable	Yes
Converter losses to IEC61800-9-2*		V/f with flux current control (FCC)	Yes
Efficiency class	IE2	Standards	
Comparison with the reference converter (90% / 100%)	28.80 %	Compliance with standards	UL 508C (UL list number E121068), CE, RCM

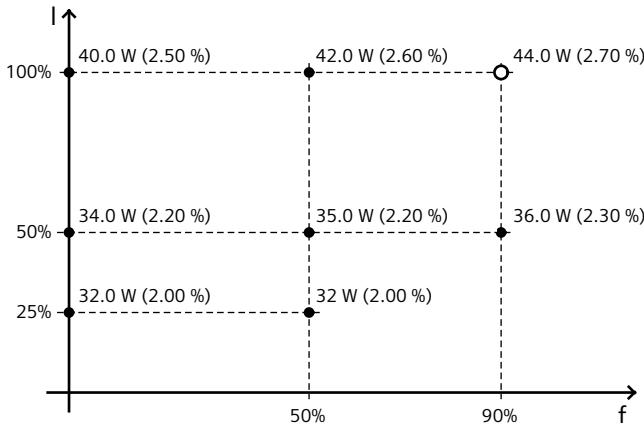

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values