



Auxiliary switch, Front installation 1 OE + 1 S left and / or right mountable, accessory for Load disconnecter 3LD3

Model	
product brand name	SETRON
product designation	auxiliary switch
design of the product	accessories for 3LD3 switch disconnectors
operational current	• at AC-15 at 110 V rated value 6 A • at AC-15 at 230 V rated value 3 A • at AC-15 at 500 V rated value 1.4 A • at DC-13 at 24 V rated value 4 A
suitability for use	for 3LD3 front mounting
special product feature	NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch
tightening torque with screw-type terminals	• minimum 0.8 N·m • maximum 1.2 N·m
type of connectable conductor cross-sections for auxiliary contacts	• solid 2x (0.75-2.5 mm²), 1x 4 mm² • finely stranded with core end processing 2x (0.75-2.5 mm²), 1x 4 mm² • stranded 2x (0.75-2.5 mm²), 1x 4 mm²

Approvals Certificates	
General Product Approval	other



[Confirmation](#)




[Miscellaneous](#)

[Confirmation](#)

Environment	
Environmental Conformations	Environmental Conformations

Further information	
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9340-6B	

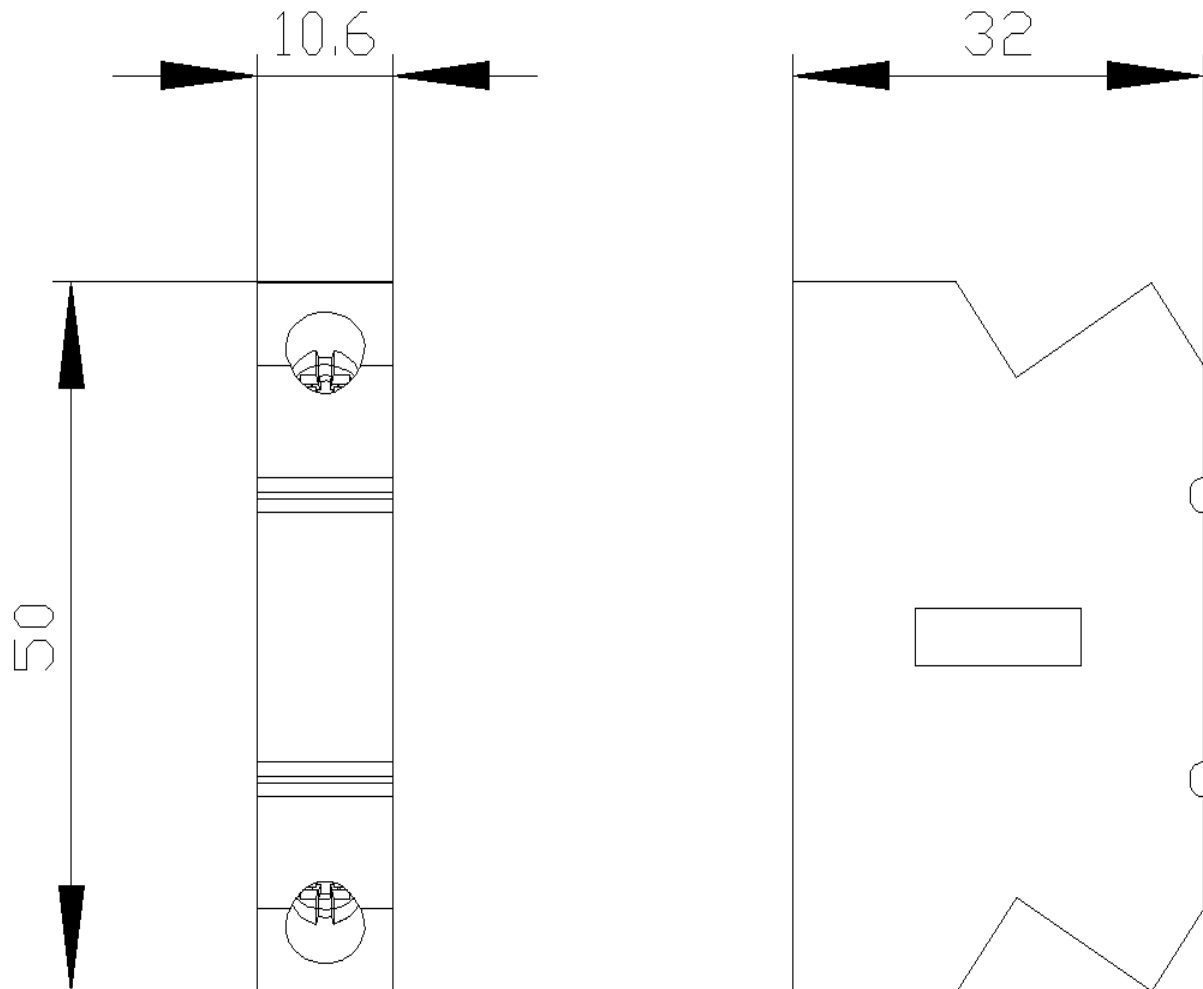

last modified:

8/8/2024 

