


Data sheet

6XV1801-2C

product type designation

product description

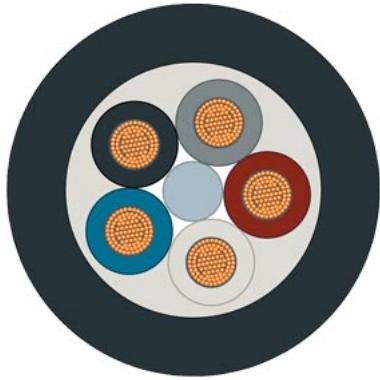

Control cable 5 x 0.25

Flexible Control cable (5-core), sold by the meter, unassembled

Control cable, 5-core Power line, stranded wire, 5 x AWG24; Delivery unit: max. 1000 m, minimum order quantity 20 m sold by the meter

cable designation

LIHH11Y 5X1X0.25 SW

electrical data

| | |
|---|---------------------|
| operating voltage / RMS value | 300 V |
| conductor cross section / of the power line | 0.4 mm ² |
| continuous current / of the power lines | 2.5 A |

mechanical data

| | |
|---|-------------------------------------|
| number of electrical cores | 5 |
| AWG number | 24 |
| outer diameter | |
| • of inner conductor | 0.7 mm |
| • of the wire insulation | 1.2 mm |
| • of cable sheath | 5.3 mm |
| symmetrical tolerance of the outer diameter / of cable sheath | 0.3 mm |
| conductor class | 6 |
| material | |
| • of the conductor | CU, blank |
| • of the wire insulation | FRNC |
| • of cable sheath | PUR |
| product component / PE connection | No |
| marking / of cores | Color |
| color | |
| • of the power line insulation | Brown / white / blue / black / gray |
| • of cable sheath | Black |
| bending radius | |
| • with single bend / minimum permissible | 21 mm |
| • with multiple bends / minimum permissible | 42 mm |
| tensile load / maximum | 10 N |
| weight per length | 40 kg/km |

ambient conditions

| | |
|--|--|
| ambient temperature | |
| • during operation | -15 ... +80 °C |
| • during storage | -25 ... +80 °C |
| • during transport | -25 ... +80 °C |
| • during installation | -15 ... +80 °C |
| fire behavior | Flame-resistant according to IEC 60332-1-2, UL 2556, Sec. 9.3 (FT1), CSA C22.2 No.2556, UL 1581, Sec. 1061 (cable flame) |
| class of burning behaviour / according to EN 13501-6 | Fca |
| chemical resistance | |

| | |
|--|--|
| • to mineral oil | oil resistant according to DIN EN 60811-404 (7x24h/90°C) |
| • to grease | Conditional resistance |
| • to water | Conditional resistance |
| radiological resistance / to UV radiation | sunlight resistant acc. to UL 2556 sec. 4.2.8.5 (720h) |
| product features, product functions, product components / general | |
| product feature | |
| • halogen-free | Yes |
| • silicon-free | Yes |
| standards, specifications, approvals | |
| UL/ETL listing / 300 V Rating | Yes; UL Style 20233 (80°C/300V) CSA C22.2 No. 210 I/II A/B FT1 |
| UL/ETL style / 600 V Rating | No; F |
| certificate of suitability | |
| • EAC approval | Yes |
| • RoHS conformity | Yes |
| reference code | |
| • according to IEC 81346-2:2019 | WDB |
| further information / internet links | |
| internet link | |
| • to website: Selection guide for cables and connectors | https://support.industry.siemens.com/cs/ww/en/view/109766358 |
| • to web page: selection aid TIA Selection Tool | https://www.siemens.com/tstcloud |
| • to website: Industrial communication | https://www.siemens.com/simatic-net |
| • to web page: SiePortal | https://sieportal.siemens.com/ |
| • to website: Image database | https://www.automation.siemens.com/bilddb |
| • to website: CAx-Download-Manager | https://www.siemens.com/cax |
| • to website: Industry Online Support | https://support.industry.siemens.com |
| security information | |
| security information | <p>Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under https://www.siemens.com/cert. (V4.7)</p> |

Approvals / Certificates

General Product Approval

Manufacturer Declaration



last modified:

8/18/2024