



contactor relay, 4 NO, 110 V DC, spring-loaded terminal, frame size S00

|   |                        |
|---|------------------------|
| product brand name  | SIRIUS                 |
| product designation   | Auxiliary contactor    |
| product type designation  | 3RH2                   |
| <b>General technical data</b>   |                        |
| size of contactor   | S00                    |
| product extension auxiliary switch  | Yes                    |
| power loss [W] for rated value of the current without load current share typical      | 4 W                    |
| insulation voltage with degree of pollution 3 at AC rated value                       | 690 V                  |
| degree of pollution   | 3                      |
| surge voltage resistance rated value  | 6 kV                   |
| shock resistance at rectangular impulse   |                        |
| • at DC   | 10g / 5 ms, 5g / 10 ms |
| shock resistance with sine pulse  |                        |
| • at DC   | 15g / 5 ms, 8g / 10 ms |
| mechanical service life (operating cycles)  |                        |
| • of contactor typical  | 30 000 000             |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000              |
| • of the contactor with added auxiliary switch block typical                          | 10 000 000             |
| reference code according to IEC 81346-2   | K                      |
| Substance Prohibitance (Date)   | 10/01/2009             |
| Weight  | 0.291 kg               |
| <b>Ambient conditions</b>   |                        |
| installation altitude at height above sea level maximum                               | 2 000 m                |
| ambient temperature   |                        |
| • during operation  | -25 ... +60 °C         |
| • during storage  | -55 ... +80 °C         |
| relative humidity minimum   | 10 %                   |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum                        | 95 %                   |
| <b>Environmental footprint</b>  |                        |
| Environmental Product Declaration(EPD)  | Yes                    |
| global warming potential [CO <sub>2</sub> eq] total                                   | 133 kg                 |
| global warming potential [CO <sub>2</sub> eq] during manufacturing                    | 1.3 kg                 |
| global warming potential [CO <sub>2</sub> eq] during operation                        | 132 kg                 |
| global warming potential [CO <sub>2</sub> eq] after end of life                       | -0.227 kg              |
| <b>Main circuit</b>   |                        |
| no-load switching frequency   |                        |
| • at AC   | 10 000 1/h             |
| • at DC   | 10 000 1/h             |

| Control circuit/ Control  |               |
|---|---------------|
| <b>type of voltage of the control supply voltage</b>                                  | DC            |
| <b>control supply voltage at DC rated value</b>                                       | 110 V         |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> |               |
| • initial value   | 0.8           |
| • full-scale value  | 1.1           |
| <b>closing power of magnet coil at DC</b>   | 4 W           |
| <b>holding power of magnet coil at DC</b>   | 4 W           |
| <b>closing delay</b>  |               |
| • at DC   | 30 ... 100 ms |
| <b>opening delay</b>  |               |
| • at DC   | 7 ... 13 ms   |
| <b>arcing time</b>  | 10 ... 15 ms  |
| Auxiliary circuit   |               |
| <b>number of NO contacts for auxiliary contacts</b>                                   | 4             |
| • instantaneous contact   | 4             |
| <b>identification number and letter for switching elements</b>                        | 40 E          |
| <b>operational current at AC-12 maximum</b>   | 10 A          |
| <b>operational current at AC-15</b>   |               |
| • at 230 V rated value  | 10 A          |
| • at 400 V rated value  | 3 A           |
| • at 500 V rated value  | 2 A           |
| • at 690 V rated value  | 1 A           |
| <b>operational current at 1 current path at DC-12</b>                                 |               |
| • at 24 V rated value   | 10 A          |
| • at 110 V rated value  | 3 A           |
| • at 220 V rated value  | 1 A           |
| • at 440 V rated value  | 0.3 A         |
| • at 600 V rated value  | 0.15 A        |
| <b>operational current with 2 current paths in series at DC-12</b>                    |               |
| • at 24 V rated value   | 10 A          |
| • at 60 V rated value   | 10 A          |
| • at 110 V rated value  | 4 A           |
| • at 220 V rated value  | 2 A           |
| • at 440 V rated value  | 1.3 A         |
| • at 600 V rated value  | 0.65 A        |
| <b>operational current with 3 current paths in series at DC-12</b>                    |               |
| • at 24 V rated value   | 10 A          |
| • at 60 V rated value   | 10 A          |
| • at 110 V rated value  | 10 A          |
| • at 220 V rated value  | 3.6 A         |
| • at 440 V rated value  | 2.5 A         |
| • at 600 V rated value  | 1.8 A         |
| <b>operating frequency at DC-12 maximum</b>   | 1 000 1/h     |
| <b>operational current at 1 current path at DC-13</b>                                 |               |
| • at 24 V rated value   | 10 A          |
| • at 110 V rated value  | 1 A           |
| • at 220 V rated value  | 0.3 A         |
| • at 440 V rated value  | 0.14 A        |
| • at 600 V rated value  | 0.1 A         |
| <b>operational current with 2 current paths in series at DC-13</b>                    |               |
| • at 24 V rated value   | 10 A          |
| • at 60 V rated value   | 3.5 A         |
| • at 110 V rated value  | 1.3 A         |
| • at 220 V rated value  | 0.9 A         |
| • at 440 V rated value  | 0.2 A         |
| • at 600 V rated value  | 0.1 A         |
| <b>operational current with 3 current paths in series at DC-13</b>                    |               |
| • at 24 V rated value   | 10 A          |
| • at 60 V rated value   | 4.7 A         |

|   |  |
|---|--|
| • at 110 V rated value  | 3 A  |
| • at 220 V rated value  | 1.2 A  |
| • at 440 V rated value  | 0.5 A  |
| • at 600 V rated value  | 0.26 A   |
| <b>operating frequency at DC-13 maximum</b>   | 1 000 1/h  |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)  |
| <b>UL/CSA ratings</b>   |  |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600  |
| <b>Short-circuit protection</b>   |  |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA   |
| design of the fuse link for short-circuit protection of the auxiliary switch required                     | fuse gL/gG: 10 A   |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail   |
| <b>height</b>   | 70 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 73 mm  |
| <b>required spacing</b>   |  |
| • with side-by-side mounting  |  |
| — forwards  | 10 mm  |
| — upwards   | 10 mm  |
| — downwards   | 10 mm  |
| — at the side   | 0 mm   |
| • for grounded parts  |  |
| — forwards  | 10 mm  |
| — upwards   | 10 mm  |
| — at the side   | 6 mm   |
| — downwards   | 10 mm  |
| • for live parts  |  |
| — forwards  | 10 mm  |
| — upwards   | 10 mm  |
| — downwards   | 10 mm  |
| — at the side   | 6 mm   |
| <b>Connections/ Terminals</b>   |  |
| <b>type of electrical connection for auxiliary and control circuit</b>                                    | spring-loaded terminals  |
| <b>type of connectable conductor cross-sections</b>   |  |
| • for auxiliary contacts  |  |
| — solid or stranded   | 2x (0,5 ... 4 mm <sup>2</sup> )  |
| — finely stranded with core end processing  | 2x (0,5 ... 2,5 mm <sup>2</sup> )  |
| — finely stranded without core end processing   | 2x (0,5 ... 2,5 mm <sup>2</sup> )  |
| • for AWG cables for auxiliary contacts   | 2x (20 ... 12)   |
| <b>Safety related data</b>  |  |
| <b>product function</b>   |  |
| • positively driven operation according to IEC 60947-5-1  | Yes  |
| • suitable for safety function  | Yes  |
| <b>suitability for use safety-related switching OFF</b>   | Yes  |
| <b>service life maximum</b>   | 20 a   |
| <b>proportion of dangerous failures</b>   |  |
| • with low demand rate according to SN 31920  | 40 %   |
| • with high demand rate according to SN 31920   | 73 %   |
| <b>B10 value with high demand rate according to SN 31920</b>  | 1 000 000; With 0.3 x le   |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>                                      | 100 FIT  |
| <b>ISO 13849</b>  |  |
| <b>device type according to ISO 13849-1</b>   | 3  |
| <b>overdimensioning according to ISO 13849-2 necessary</b>  | Yes  |
| <b>IEC 61508</b>  |  |
| <b>safety device type according to IEC 61508-2</b>  | Type A   |
| <b>Electrical Safety</b>  |  |

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



[KC](#)

##### General Product Approval

##### EMV

##### Functional Safety

##### Test Certificates

##### Marine / Shipping



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



##### Marine / Shipping



##### other

[Miscellaneous](#)

[Confirmation](#)

##### Railway

[Special Test Certificate](#)

##### Dangerous goods

[Transport Information](#)

##### Environment



[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2140-2BF40>

##### Cax online generator

<http://support.automation.siemens.com/WW/CAxorder/default.aspx?lang=en&mlfb=3RH2140-2BF40>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2140-2BF40>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2140-2BF40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2140-2BF40&lang=en)


##### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2140-2BF40/char>

##### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2140-2BF40&objecttype=14&gridview=view1>

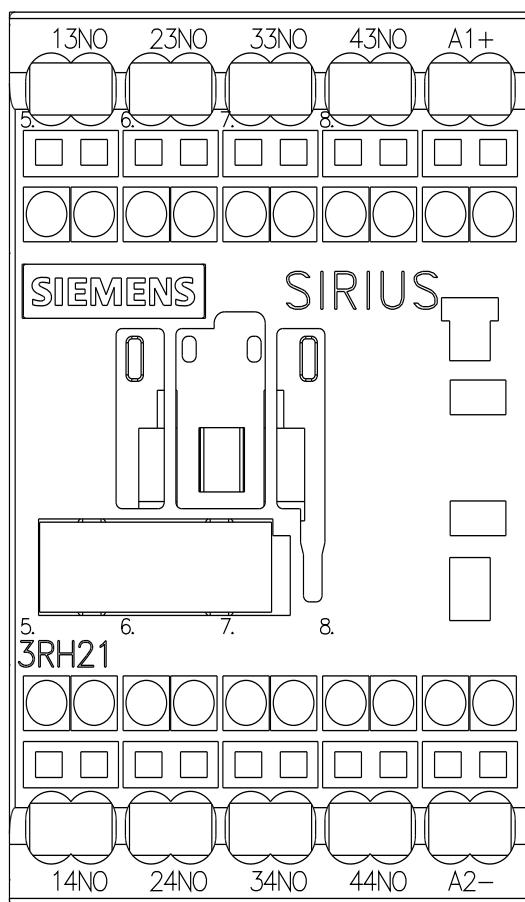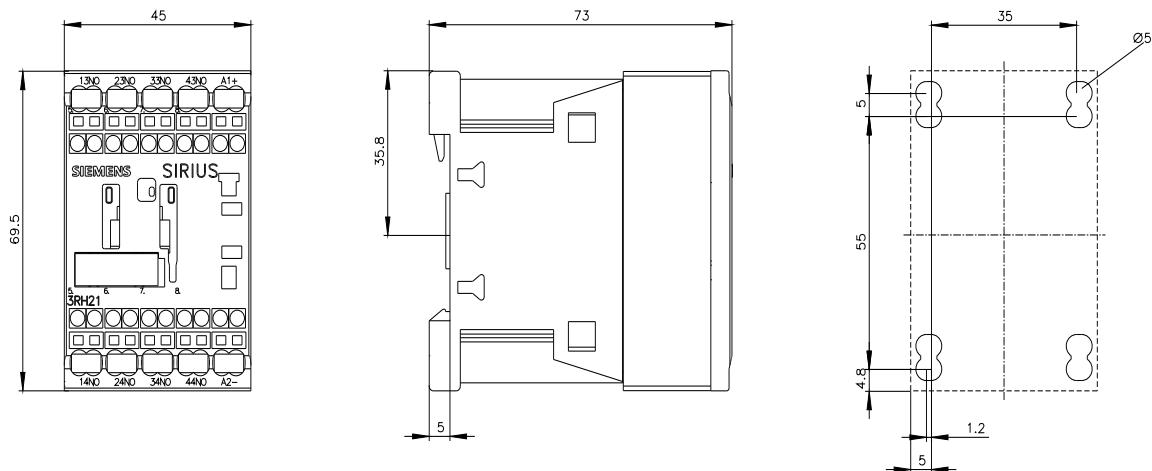

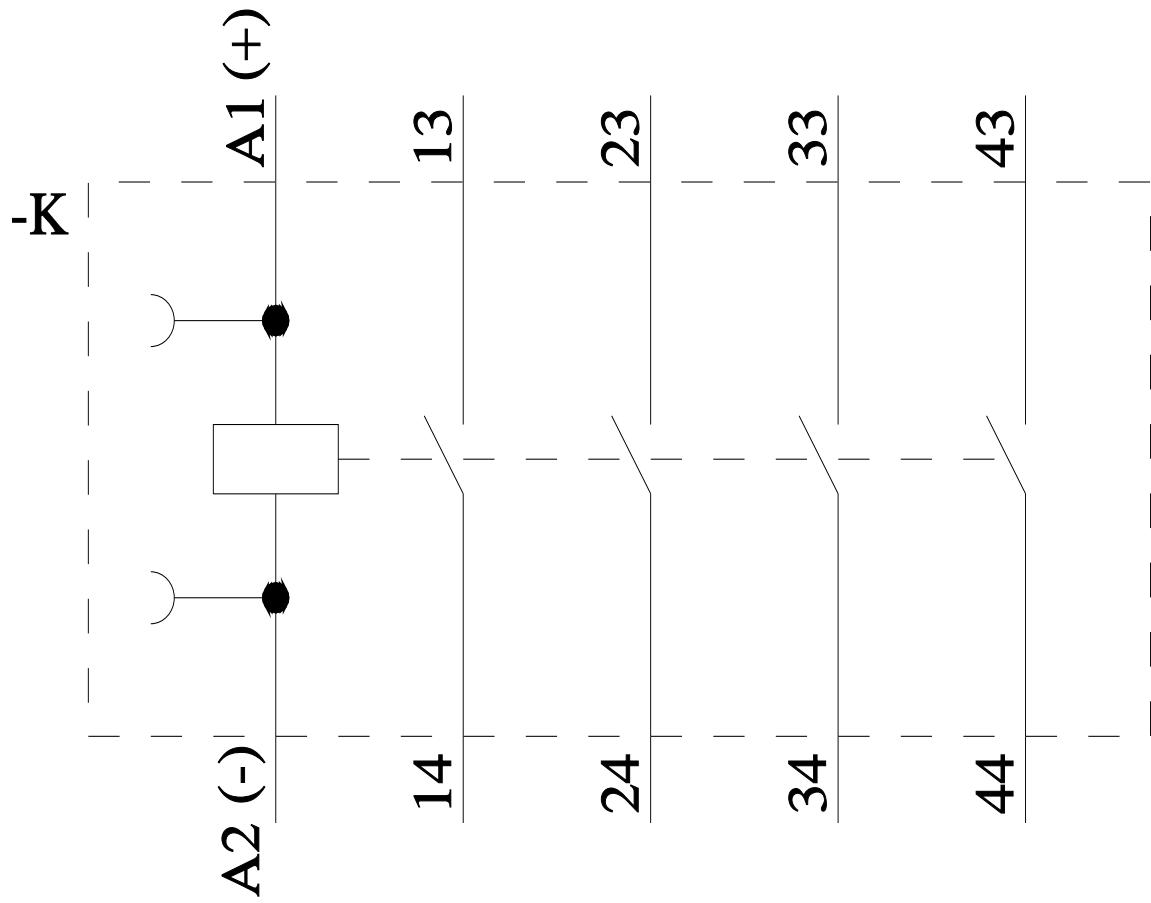

last modified:

1/28/2025 