



expansion module switched Ethernet PROFINET V3, plug-in, for 7KM PAC32x0 / 4200 / 3VA COM100/ 800

Model	
product brand name	SETRON
product designation	Switched Ethernet PROFINET expansion module
type of voltage supply	via PAC 3200 / PAC3220 / PAC4200 / COM100 / 800
General technical data	
type of update time at the PROFINET IO device with IRT design of the interface according to PROFINET	500 µs, 1 ms, 2 ms, 4 ms for IRT
type of transfer rate for plug type RJ45	2 ports (switch)
MTBF	PROFINET with 100 Mbps
galvanic isolation	196.31 y
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750	Maximum insulation voltage: 500V AC
software version with STEP 7 in the TIA Portal required	P
GSD version/revision with PROFINET required	≥ STEP 7 V16
number of interfaces according to PROFINET	GSDML V2.3
interface design 1 integrated switch	2
protocol at the 1st interface media redundancy protocol	Yes
PROFINET IO device	PROFINET MRP
transmission mode for Industrial Ethernet	Yes
product function at the Ethernet interface Autonegotiation	PROFINET with 100 Mbps
product function at the Ethernet interface Autocrossover	Yes
open IE communication	Yes
IRT	Yes
transfer rate for plug type RJ45 100 Mbit/s	Yes
service as PROFINET IO device supports PROFINergy	Yes
protocol at the 1st interface media redundancy protocol	Yes
product function of the PROFINET IO controller is supported PROFINET system redundancy	Yes
for open IE communication	
TCP/IP	Yes
SNMP	Yes
LLDP	Yes
degree of pollution	2 according to IEC 61131
Protection class	
protection class IP	IP20
combustibility class according to UL 94	V 0
suitability for use	7KM PAC 3200 / PAC 3220 / PAC 4200 / 3VA COM100 / 800
reactive power meter	No
Connections	
type of electrical connection	2 x RJ45 socket

Mechanical Design	
height	63 mm
width	43 mm
depth	22 mm
fastening method	pluggable

Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-25 °C
• maximum	70 °C

Certificates	
reference code according to EN 61346-2	P

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------

[Confirmation](#)

[KC](#)



other

[Miscellaneous](#)

[Environmental Con-
firmations](#)

[Miscellaneous](#)

[PROFINET-Certific-
ation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KM9300-0AE02-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KM9300-0AE02-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AE02-0AA0

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

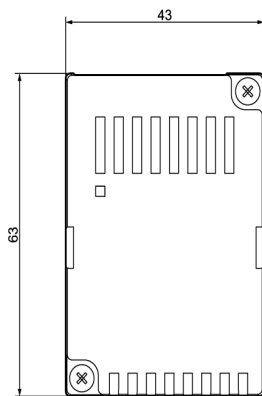

I202_18221



mm
27,5 = 27.5



