



Auxiliary switch, Floor installation 1 OE + 1 S left and / or right mountable, accessory for Load disconnecter 3LD3

| Model                                                               |                                                                                                                                                                                                                          |
|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| product brand name                                                  | SETRON                                                                                                                                                                                                                   |
| product designation                                                 | auxiliary switch                                                                                                                                                                                                         |
| design of the product                                               | accessories for 3LD3 switch disconnectors                                                                                                                                                                                |
| operational current                                                 | <ul style="list-style-type: none"><li>• at AC-15 at 110 V rated value 6 A</li><li>• at AC-15 at 230 V rated value 3 A</li><li>• at AC-15 at 500 V rated value 1.4 A</li><li>• at DC-13 at 24 V rated value 4 A</li></ul> |
| suitability for use                                                 | for 3LD3 floor mounting, distribution board mounting, and basic switches without knob-operated mechanism                                                                                                                 |
| special product feature                                             | NO: lagging during switching ON, leading during switching OFF the 3LD switch.<br>NC: leading during switching ON, lagging during switching OFF the 3LD switch                                                            |
| tightening torque with screw-type terminals                         | <ul style="list-style-type: none"><li>• minimum 0.8 N·m</li><li>• maximum 1.2 N·m</li></ul>                                                                                                                              |
| type of connectable conductor cross-sections for auxiliary contacts | <ul style="list-style-type: none"><li>• solid 2x (0.75-2.5 mm²), 1x 4 mm²</li><li>• finely stranded with core end processing 2x (0.75-2.5 mm²), 1x 4 mm²</li><li>• stranded 2x (0.75-2.5 mm²), 1x 4 mm²</li></ul>        |

Approvals Certificates

|                          |       |
|--------------------------|-------|
| General Product Approval | other |
|--------------------------|-------|



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

Environment

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9340-6C>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3LD9340-6C>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3LD9340-6C](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9340-6C)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

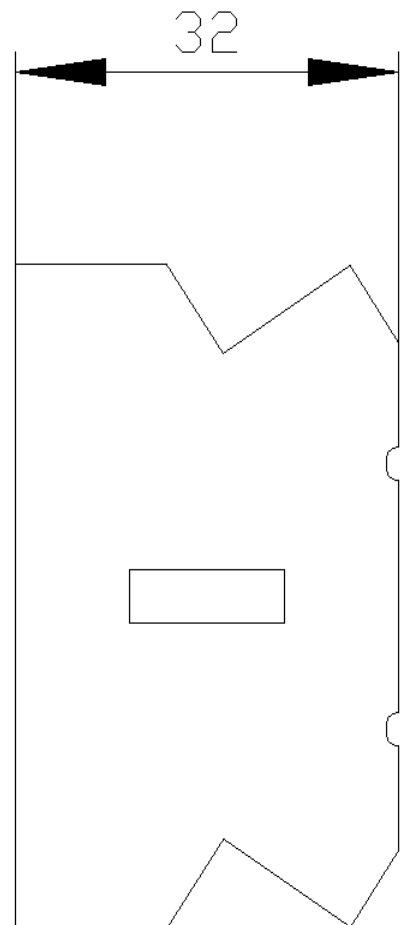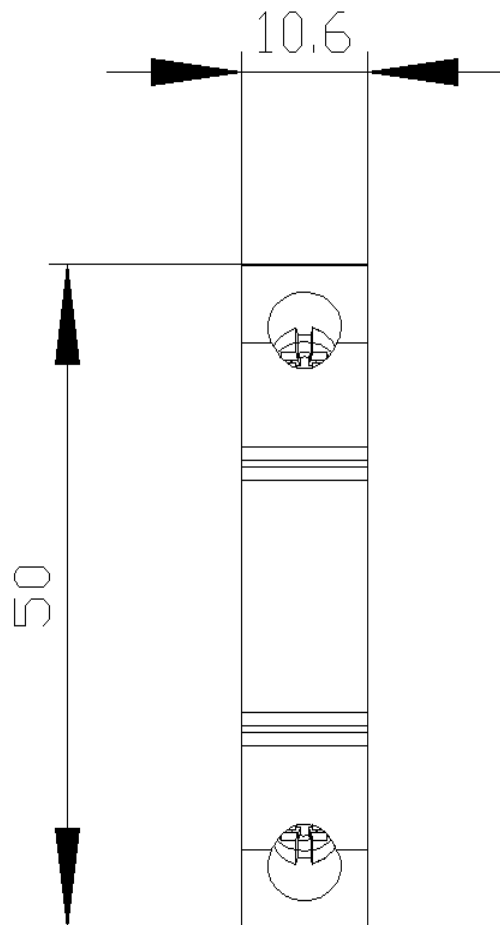

last modified:

8/8/2024 

