



control wire tap for box terminal 10 units accessory for: 3VA12; 3VA20/21/22

Model			
product brand name		SETRON	
product designation		control wire tap	
accessories		Control wire tap	
General technical data			
designation / of the terminal		CW-tap for TS1.X	
type of electrical connection / with control wire tap		Yes	
Connections according IEC			
connectable conductor cross-section			
• for copper cable / stranded / minimum		0.75 mm²	
• for copper cable / stranded / maximum		2.5 mm²	
stripped length		5-8 mm	
tightening torque / when using copper cables			
• solid		0.75 - 2.5 mm²: 2 Nm	
• finely stranded		0.75 - 2.5 mm²: 2 Nm	
Connetctions according UL			
permissible temperature / of connectable conductor / according to UL 486A-486B		75 °C	
stripped length		0.2-0.3 in	
Certificates			
General Product Approval		EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Environment			
	Confirmation	Miscellaneous	Miscellaneous	Environmental Confirmations	Environmental Confirmations
LRS					

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9200-0WB00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9200-0WB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9200-0WB00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

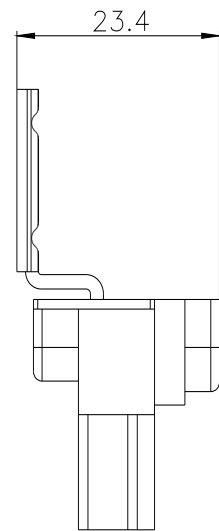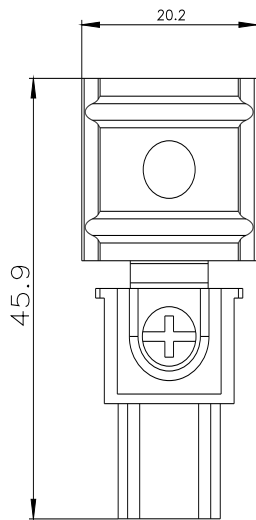

last modified:

11/27/2024 

