



SITOR cylindrical fuse link, 14x51 mm, 2 A, aR, Un AC: 660 V

Figure similar

| Model                                                                               |                             |
|-------------------------------------------------------------------------------------|-----------------------------|
| product brand name                                                                  | SETRON                      |
| product designation                                                                 | SITOR cylindrical fuse link |
| General technical data                                                              |                             |
| operating class of the fuse link                                                    | aR                          |
| type of voltage of the operating voltage                                            | AC                          |
| Dissipation                                                                         |                             |
| power loss [W]                                                                      | 3 W                         |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 3 W                         |
| Main circuit                                                                        |                             |
| operational current rated value                                                     | 2 A                         |
| Product details                                                                     |                             |
| product component striker                                                           | No                          |
| Mechanical Design                                                                   |                             |
| mounting position                                                                   | Any, preferably vertical    |
| net weight                                                                          | 20 g                        |
| Approvals Certificates                                                              |                             |
| General Product Approval                                                            |                             |



[Confirmation](#)



| other | Environment |
|-------|-------------|
|-------|-------------|

[Miscellaneous](#)

[Confirmation](#)

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NC1402>  
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3NC1402>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NC1402](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1402)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

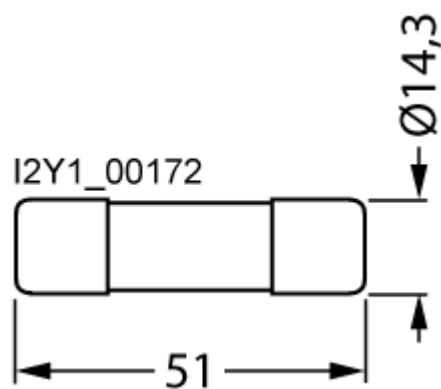

last modified:

3/11/2024 

