



SITOR fuse link, with blade contacts, NH1, In: 315 A, aR, Un AC: 690 V, Un DC: 440 V, front indicator

| Model                                                                  |                                                                               |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| product brand name                                                     | SETRON                                                                        |
| product designation                                                    | SITOR fuse link                                                               |
| design of the product                                                  | with blade contacts without slots                                             |
| design of an identification indicator                                  | front indicator                                                               |
| design of the switching contact                                        | with blade contacts for mounting in LV HRC fuse bases or switch disconnectors |
| design of the fuse link                                                | SITOR, LV HRC design                                                          |
| General technical data                                                 |                                                                               |
| size of fuse system according to EN 60269-1                            | NH1                                                                           |
| operating class of the fuse link                                       | aR                                                                            |
| type of voltage of the operating voltage                               | AC/DC                                                                         |
| Supply voltage                                                         |                                                                               |
| supply voltage                                                         |                                                                               |
| • at AC                                                                | 690 V                                                                         |
| • at DC                                                                | 440 V                                                                         |
| Breaking Capacity                                                      |                                                                               |
| switching capacity current                                             |                                                                               |
| • at DC according to IEC 60947-2 rated value                           | 50 kA                                                                         |
| • according to IEC 60947-2 rated value                                 | 100 kA                                                                        |
| Dissipation                                                            |                                                                               |
| power loss [W]                                                         | 68 W                                                                          |
| power loss [W]                                                         |                                                                               |
| • for rated value of the current at AC in hot operating state per pole | 68 W                                                                          |
| • maximum                                                              | 68 W                                                                          |
| Product details                                                        |                                                                               |
| product description                                                    | with blade contacts, silver-plated                                            |
| accessories included                                                   | no                                                                            |
| Mechanical Design                                                      |                                                                               |
| mounting position                                                      | Any, preferably vertical                                                      |
| net weight                                                             | 478 g                                                                         |
| Environmental conditions                                               |                                                                               |
| ambient temperature during operation                                   |                                                                               |
| • minimum                                                              | -20 °C                                                                        |
| • maximum                                                              | 50 °C                                                                         |
| environmental category                                                 | -20 to +50 at 95% relative humidity                                           |
| Approvals Certificates                                                 |                                                                               |
| General Product Approval                                               |                                                                               |



[Confirmation](#)



other

Environment

[Confirmation](#)

[Miscellaneous](#)

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE8230-0MK>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NE8230-0MK>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NE8230-0MK](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE8230-0MK)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

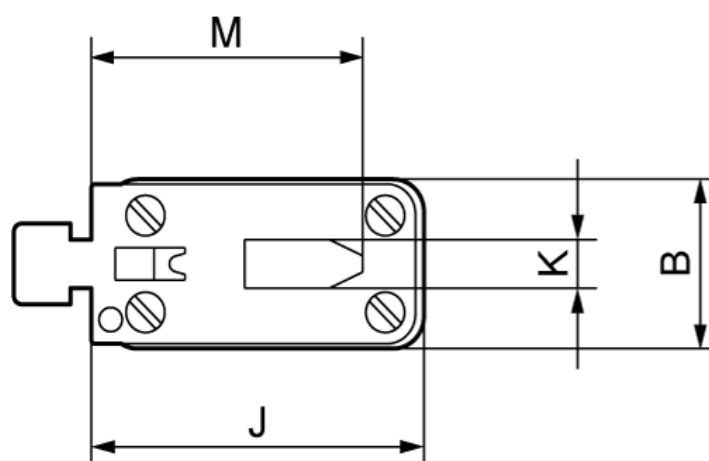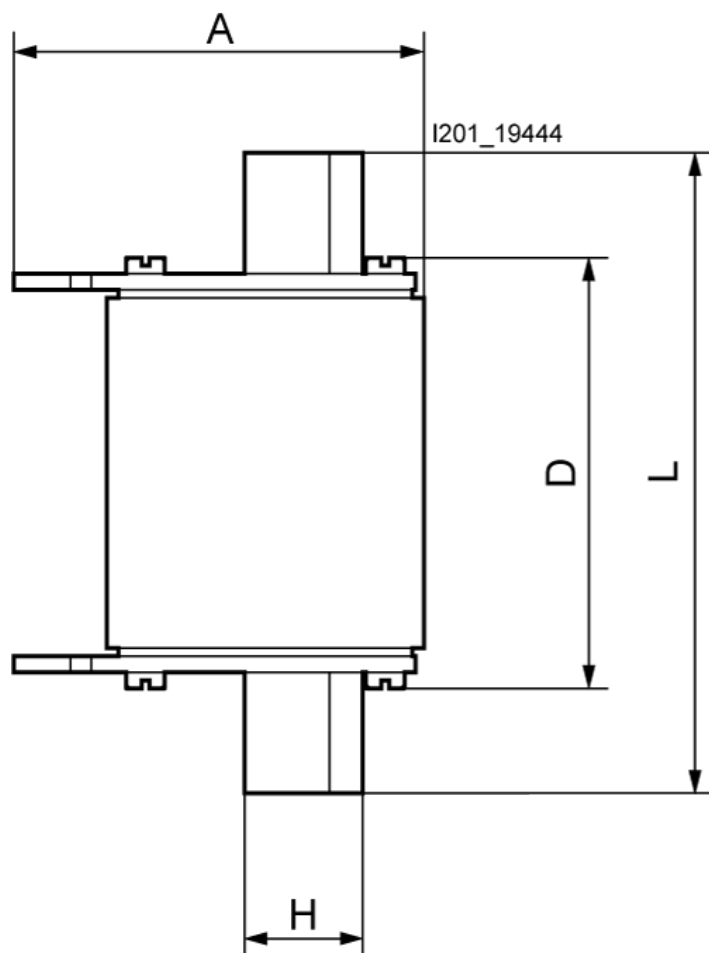

| Type               | Dimensions |    |      |    |    |   |    |      |
|--------------------|------------|----|------|----|----|---|----|------|
|                    | A          | B  | D    | H  | J  | K | M  | L    |
| <b>3NE88..-0MK</b> | 53         | 21 | 51,5 | 15 | 43 | 6 | 35 | 78,5 |
| <b>3NE82..-0MK</b> | 62,5       | 44 | 70,5 | 20 | 53 | 6 | 40 | 135  |
| <b>3NE83..-0MK</b> | 68         | 50 | 70,5 | 25 | 61 | 6 | 48 | 150  |



