

SECTION FUS-NH 3x 32A SANS COMM

Model	
product designation	switch disconnecter with fuses
design of the product	for NH C00
fuse system	NH C00
Supply voltage	
operating voltage at DC rated value	220 V
Protection class	
protection class IP	IP00
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	0.3 W
Main circuit	
operational current rated value	32 A
Connections	
type of electrical connection for main current circuit	BUSBAR CONNECTION
Mechanical Design	
height	105 mm
width	142 mm
depth	86.5 mm
fastening method	Surface mounting and installation
Net Weight	1 kg
Environmental conditions	
ambient temperature during operation	
• minimum	-20 °C
• maximum	45 °C
ambient temperature during storage minimum	-25 °C
Further information	

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KL7111-3AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KL7111-3AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KL7111-3AA00

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>

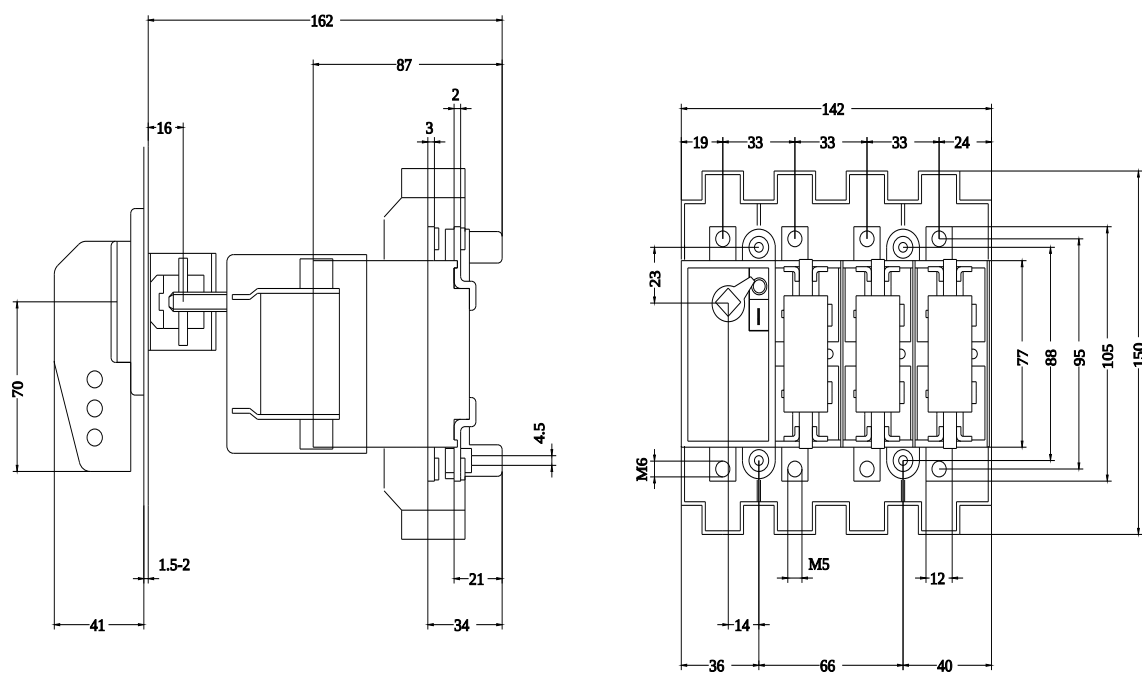

last modified:

5/16/2026 

