



Accessory 3WA/3WL Undervoltage release (UVR-t), with time delay 0,2-3,2 s 208-240 V AC / 220-250 V DC,

| Model                                         |                                                                                                                |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| product brand name                            | SETRON                                                                                                         |
| product designation                           | Undervoltage release                                                                                           |
| design of the product                         | undervoltage release (UVR-t), time delay 0.2 to 3.2 s, 208 to 240 V AC / 220 to 250 V DC                       |
| design of the fuse link                       | fuse gG: 2 A, miniature circuit breaker C characteristic: 6 A, miniature circuit breaker D characteristic: 4 A |
| closing apparent power [VA]                   | 60 VA                                                                                                          |
| operating apparent power [VA]                 | 5 VA                                                                                                           |
| closing active power [W]                      | 50 W                                                                                                           |
| operating active power [W]                    | 5 W                                                                                                            |
| OFF-delay time minimum                        | 200 ms                                                                                                         |
| OFF-delay time maximum                        | 3 200 ms                                                                                                       |
| control supply voltage (Us) at AC rated value | 208 to 240 V 50/60 Hz                                                                                          |
| ambient temperature during operation          | <ul style="list-style-type: none"><li>• minimum -40 °C</li><li>• maximum 70 °C</li></ul>                       |
| ambient temperature during storage            | <ul style="list-style-type: none"><li>• minimum -40 °C</li><li>• maximum 80 °C</li></ul>                       |

| Approvals Certificates   |     |
|--------------------------|-----|
| General Product Approval | EMV |



[Confirmation](#)



| Test Certificates             | Marine / Shipping                                  | other                                    | Dangerous goods                       |
|-------------------------------|----------------------------------------------------|------------------------------------------|---------------------------------------|
| <a href="#">Miscellaneous</a> | <a href="#">Type Test Certificates/Test Report</a> | <a href="#">Special Test Certificate</a> | <a href="#">Confirmation</a>          |
|                               |                                                    |                                          | <a href="#">Transport Information</a> |

| Dangerous goods                             |
|---------------------------------------------|
| <a href="#">Dangerous goods information</a> |

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AE16>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AE16>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA9111-0AE16](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AE16)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

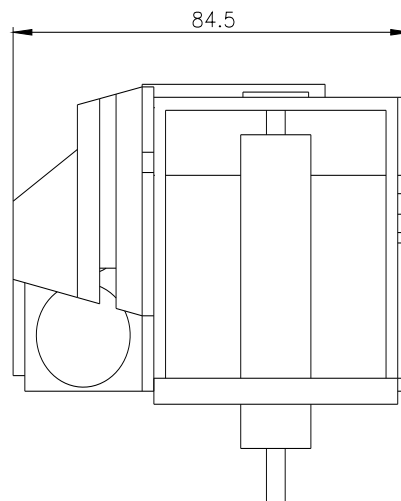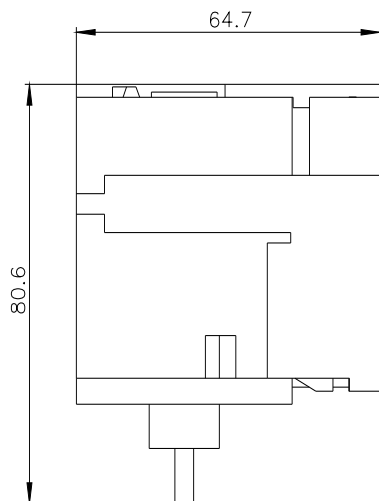

last modified:

9/9/2024 

