

## PA 10 B 613

## Photoelectric Amplifier

## Remote Photoelectric Systems



## Product Data

Function	Amplifier
Supply Voltage	24 V dc
Sensing Range	60 m
Output	NPN/PNP
Sensitivity Adjustment	Manual
Housing	11-pole DIN socket

## Technical Data

Supply Voltage	24 V dc
Voltage Tolerance	+/- 15 %
Current Consumption	Max. 3,2 VA
Response Time $t_{on} / t_{off}$ , Transistor	40 ms / 40 ms
Output, Transistor	40 mA / 30 V dc
Power On Indicator	Green LED
Output Indicator	Red LED
Hysteresis	Approx. 40 %
Operation Frequency, Transistor	12 Hz
Housing Material	Noryl


## Environmental Data

Operation Temperature	- 10 to +50 °C
Storage Temperature	- 40 to +80 °C
Sealing Class	IP 40

## Approvals



Wiring Diagram

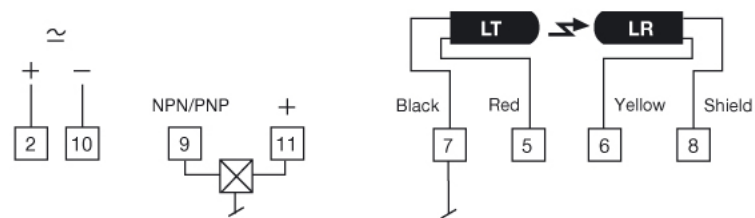

Transistor output

Dimensions

