



Tomadas de Embutir Premium


Dados Técnicos

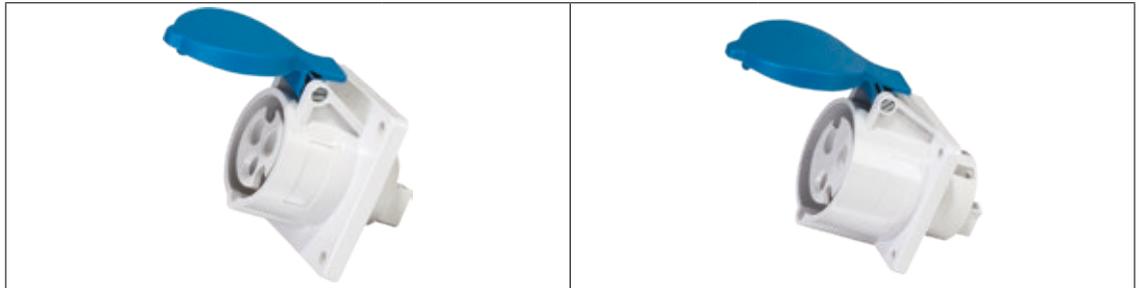

Referência	TEW-16P3H4E10	TEW-16P3H6E57	TEW-16P3H9E53	TEW-32P3H4E10	TEW-32P3H6E57	TEW-32P3H9E53
Código	12821743	12821796	12821821	12821746	12821801	12821824
Corrente (A)	16	16	16	32	32	32
Número de polos	3 (2P+T)			3 (2P+T)		
Posição pino terra / cor	4H 	6H 	9H 	4H 	6H 	9H 
Tensão nominal	100-130 V	200-250 V	380-440 V	100-130 V	200-250 V	380-440 V
Grau de proteção	IP44			IP44		
Seção transversal (mm ²)	1,5 - 2,5			4 - 6		

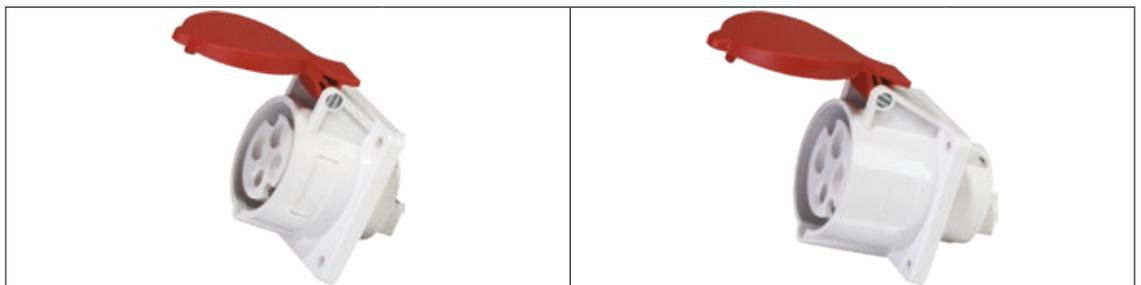

Referência	TEW-16P4H4E10	TEW-16P4H9E57	TEW-16P4H6E53	TEW-32P4H4E10	TEW-32P4H9E57	TEW-32P4H6E53
Código	12821744	12821797	12821822	12821747	12821802	12821825
Corrente (A)	16	16	16	32	32	32
Número de polos	4 (3P+T)			4 (3P+T)		
Posição pino terra / cor	4H 	9H 	6H 	4H 	9H 	6H 
Tensão nominal	100-130 V	200-250 V	380-440 V	100-130 V	200-250 V	380-440 V
Grau de proteção	IP44			IP44		
Seção transversal (mm ²)	1,5 - 2,5			4 - 6		

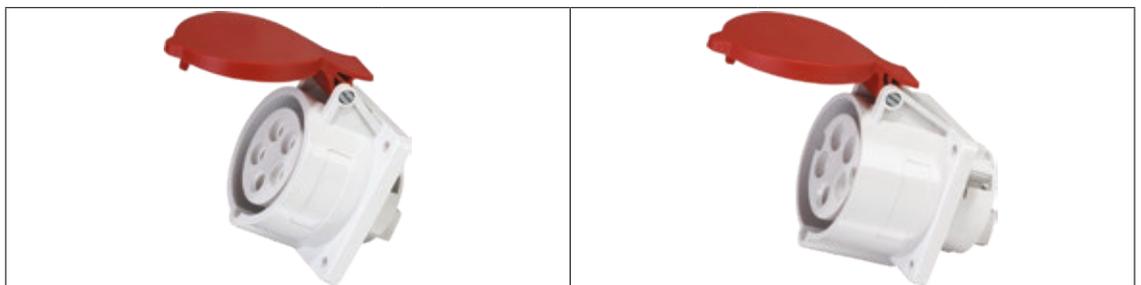

Referência	TEW-16P5H4E10	TEW-16P5H9E57	TEW-16P5H6E53	TEW-32P5H4E10	TEW-32P5H9E57	TEW-32P5H6E53
Código	12821745	12821799	12821823	12821788	12821803	12821826
Corrente (A)	16	16	16	32	32	32
Número de polos	5 (3P+T+N)			5 (3P+T+N)		
Posição pino terra / cor	4H 	9H 	6H 	4H	9H	6H
Tensão nominal	100-130 V	200-250 V	380-440 V	100-130 V	200-250 V	380-440 V
Grau de proteção	IP44			IP44		
Seção transversal (mm ²)	1,5 - 2,5			4 - 6		