



circular conduc. terminal TA2.6 6 x 1.5...35 mm² for 6 cables; 3 units accessory for: plug-in/withdrawable unit 3VA12

Model		
product brand name	SETRON	
product designation	Circular conductor terminal 6 cables 3 units	
accessories	Wire connector	
General technical data		
designation / of the terminal	TA2.6	
type of electrical connection / with control wire tap	No	
Connections according IEC		
connectable conductor cross-section		
• for copper cable / stranded / minimum	1.5 mm²	
• for copper cable / stranded / maximum	35 mm²	
stripped length	13.5 / 26 / 38.5 mm	
tightening torque / when using copper cables		
• solid	1.5 mm²: 2.8 Nm, 2.5-10 mm²: 6.2 Nm, 16 mm²: 7 Nm	
• stranded	1.5 mm²: 2.8 Nm, 2.5 - 10 mm²: 6.2 Nm, 16 - 35 mm²: 7 Nm	
• finely stranded	1.5 mm²: 2.8 Nm, 2.5 - 10 mm²: 6.2 Nm, 16 - 25 mm²: 7 Nm	
Connetctions according UL		
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C	
stripped length	0.53 / 1.0 / 1.5 in	
connectable conductor cross-section		
• for copper cable / solid / minimum	14 AWG	
• for copper cable / solid / maximum	10 AWG	
• for copper cable / stranded / minimum	14 AWG	
• for copper cable / stranded / maximum	2 AWG	
• for aluminum cable / stranded / minimum	8 AWG	
• for aluminum cable / stranded / maximum	2 AWG	
Certificates		
General Product Approval	EMV	Test Certificates
 EG-Konf.		Miscellaneous
		
		Type Test Certificates/Test Report
Marine / Shipping	other	Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9253-0JF60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9253-0JF60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9253-0JF60

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

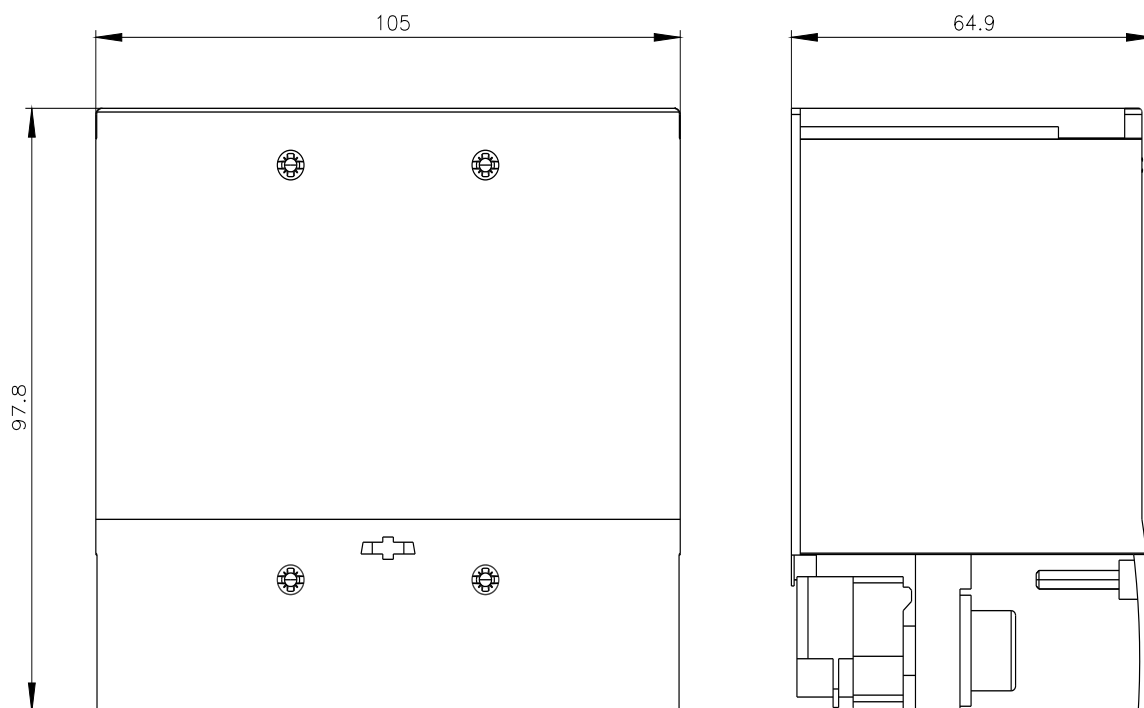

last modified:

8/9/2024 

