



circular conduc. terminal TA2.3 2 x 25...150 mm² for 2 cables; 3 units accessory for: 3VA12

Model			
product brand name	SETRON		
product designation	circular conductor terminal		
accessories	Wire connector		
General technical data			
designation / of the terminal	TA2.3		
type of electrical connection / with control wire tap	No		
Connections according IEC			
connectable conductor cross-section			
• for copper cable / stranded / minimum	25 mm²		
• for copper cable / stranded / maximum	150 mm²		
• for aluminum cable / stranded / minimum	25 mm²		
• for aluminum cable / stranded / maximum	150 mm²		
stripped length	26 / 51 mm		
tightening torque / when using copper cables			
• stranded	25 - 150 mm²: 31.1 Nm		
• finely stranded	25 - 150 mm²: 31.1 Nm		
Connetctions according UL			
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C		
stripped length	1.0 / 2.0 in		
connectable conductor cross-section			
• for copper cable / stranded / minimum	4 AWG		
• for copper cable / stranded / maximum	300 kcmil		
• for aluminum cable / stranded / minimum	4 AWG		
• for aluminum cable / stranded / maximum	300 kcmil		
Certificates			
General Product Approval		EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Environment
-------------------	-------	-------------



[Confirmation](#)

[Miscellaneous](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9213-0JJ22>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9213-0JJ22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9213-0JJ22

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

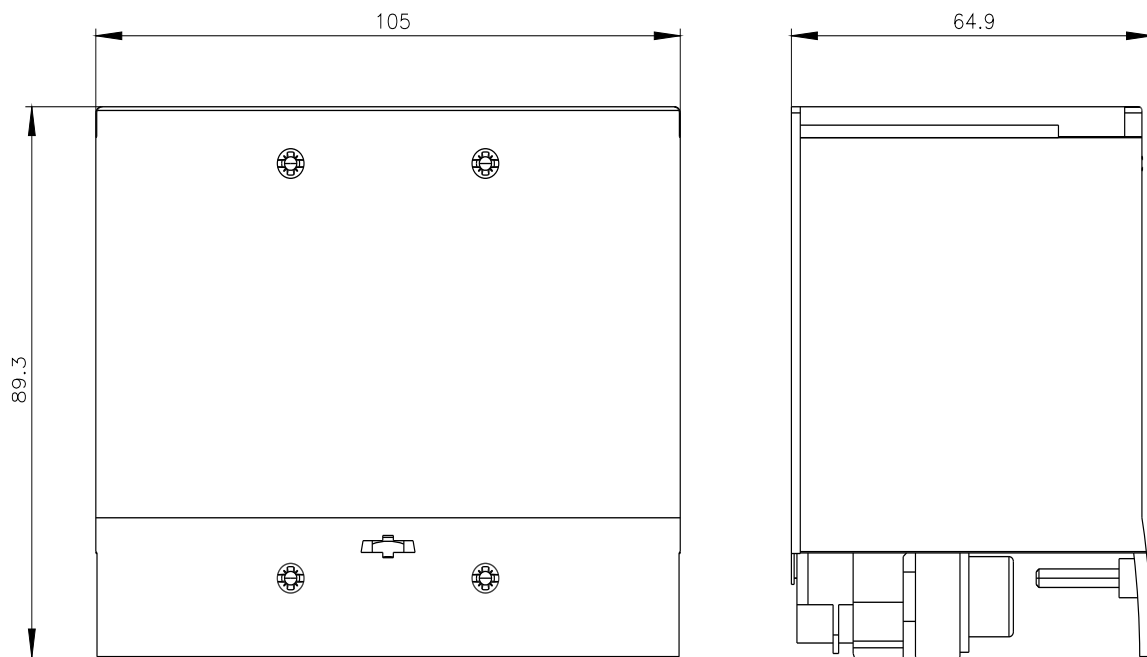

last modified:

8/9/2024 

