

Data sheet

3RK1304-0HS00-8AA0



ET 200pro ASm 400 V Disconnection module 400 V to 25 A for safe switching-off up to Category 3/4 Han Q4/2

product brand name	SIMATIC
product designation	Motor starters
design of the product	safety disconnecting module
product type designation	ET 200pro
General technical data	
product function on-site operation	No
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
degree of protection NEMA rating	Type 2, 12
shock resistance	15g / 11 ms
vibration resistance	2g
type of assignment	1
reference code according to IEC 81346-2	Q
Substance Prohibition (Date)	05/28/2009
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Lead titanium zirconium oxide - 12626-81-2
Weight	2.504 kg
product component motor brake output	No
product feature	<ul style="list-style-type: none"> • brake control with 230 V AC • brake control with 400 V AC • brake control with 24 V DC • brake control with 180 V DC • brake control with 500 V DC
product function short circuit protection	No
Safety related data	
safe state	Load circuit open
stop category according to IEC 60204-1	0
failure rate [FIT] at rate of recognizable hazardous failures (Add)	550 FIT
failure rate [FIT] at rate of non-recognizable hazardous failures (Adu)	6 FIT
average diagnostic coverage level (DCavg)	99 %
IEC 61508	
Safety Integrity Level (SIL)	
• according to IEC 61508	SIL 3
safety device type according to IEC 61508-2	Type A
Safe failure fraction (SFF)	99 %

hardware fault tolerance according to IEC 61508	1
T1 value for proof test interval or service life according to IEC 61508	10 a
Electrical Safety	
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
type of voltage	AC
operating voltage rated value	200 ... 400 V
operating frequency 1 rated value	50 Hz
operating frequency 2 rated value	60 Hz
relative positive tolerance of the operating frequency	10 %
relative negative tolerance of the operating frequency	15 %
operating range relative to the operating voltage at AC at 50 Hz	200 ... 440 V
operational current	
• at AC at 400 V rated value	25 A
• at AC-3 at 400 V rated value	25 A
• at AC-3e at 400 V rated value	25 A
operating power	
• at AC-3 at 400 V rated value	11 000 W
• at AC-3e at 400 V rated value	11 000 W
operating power for 3-phase motors at 400 V at 50 Hz	0 ... 11 000 W
Inputs/ Outputs	
product function	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
number of digital inputs	0
number of sockets	
• for digital output signals	0
• for digital input signals	0
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 ... 24 V
supply voltage 1 at DC rated value	
• minimum permissible	20.4 V
• maximum permissible	28.8 V
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	20.4 ... 28.8 V
control supply voltage 1 at DC rated value	20.4 ... 28.8 V
control supply voltage 1 at DC	24 ... 24 V
control current at DC	
• in standby mode of operation	5 mA
• when switching on	300 mA
• during operation	300 mA
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw fixing
height	230 mm
width	110 mm
depth	157.5 mm
Ambient conditions	
installation altitude at height above sea level maximum	3 500 m
ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity during operation	5 ... 95 %
Communication/ Protocol	
protocol is supported	

• PROFIBUS DP protocol	Yes
• PROFINET protocol	Yes
• PROFINET IO protocol	Yes
• PROFIsafe protocol	No
design of the interface PROFINET protocol	Yes
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function	
• supports PROFlenergy measured values	No
• supports PROFlenergy shutdown	No
address space memory of address range	
• of the inputs	1 byte
• of the outputs	0 byte
type of electrical connection of the communication interface	via backplane bus

Connections/ Terminals

type of electrical connection	
• for main current circuit	tab terminals
type of electrical connection	
• 1 for digital input signals	M12 socket
• 2 for digital input signals	M12 socket
• 3 for digital input signals	M12 socket
• 4 for digital input signals	M12 socket
type of electrical connection	
• at the manufacturer-specific device interface	optical interface
• for main energy infeed	socket according to ISO23570
• for load-side outgoing feeder	socket according to ISO23570
• for main energy transmission	socket according to ISO23570
• for supply voltage line-side	via backplane bus
• for supply voltage transmission	via backplane bus

UL/CSA ratings

full-load current (FLA) for 3-phase AC motor at 480 V rated value	20 A
yielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 200/208 V rated value	7.5 hp
— at 220/230 V rated value	7.5 hp
— at 460/480 V rated value	15 hp
— at 575/600 V rated value	20 hp
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV	Functional Safety	Test Certificates	other	Dangerous goods	Environment
	Type Examination Certificate	Type Test Certificates/Test Report	Confirmation	Transport Information	Environmental Confirmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-0HS00-8AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAxorder/default.aspx?lang=en&mfb=3RK1304-0HS00-8AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-0HS00-8AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1304-0HS00-8AA0&lang=en

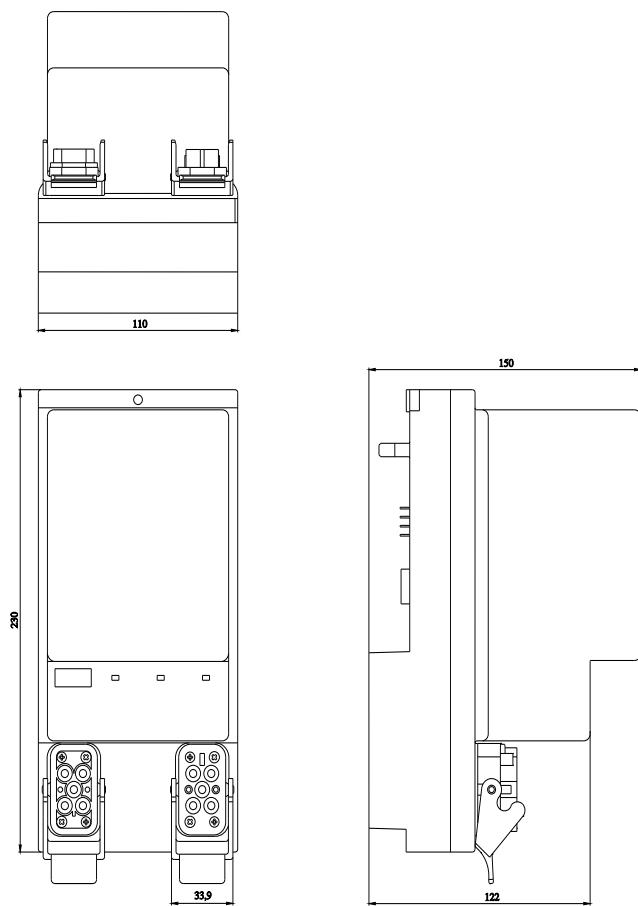

last modified:

8/9/2024