



product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW52
manufacturer's article number	<ul style="list-style-type: none"> <li>of standard HMI module usable</li> <li>of high feature HMI module usable</li> <li>of communication module PROFINET standard usable</li> <li>of communication module PROFIBUS usable</li> <li>of communication module Modbus TCP usable</li> <li>of communication module Modbus RTU usable</li> <li>of communication module Ethernet/IP</li> <li>of circuit breaker usable at 400 V</li> <li>of circuit breaker usable at 500 V</li> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> <li>of the gG fuse usable up to 690 V</li> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>
starting voltage [%]	<a href="#">3RW5980-0HS00</a>
stopping voltage [%]	<a href="#">3RW5980-0HF00</a>
start-up ramp time of soft starter	<a href="#">3RW5980-0CS00</a>
current limiting value [%] adjustable	<a href="#">3RW5980-0CP00</a>
certificate of suitability	<ul style="list-style-type: none"> <li>CE marking</li> <li>UL approval</li> <li>CSA approval</li> </ul>
product component	<ul style="list-style-type: none"> <li>HMI-High Feature</li> <li>is supported HMI-Standard</li> <li>is supported HMI-High Feature</li> </ul>
product feature integrated bypass contact system	<a href="#">3RV2032-4JA10: Type of coordination 1, <math>I_q = 65 \text{ kA}</math>, CLASS 10</a>
number of controlled phases	<a href="#">3RV2032-4JA10: Type of coordination 1, <math>I_q = 10 \text{ kA}</math>, CLASS 10</a>
buffering time in the event of power failure	<a href="#">3RV2032-4RA10: Type of coordination 1, <math>I_q = 65 \text{ kA}</math>, CLASS 10</a>
General technical data	<a href="#">3RV2032-4RA10: Type of coordination 1, <math>I_q = 10 \text{ kA}</math>, CLASS 10</a>
starting voltage [%]	<a href="#">3NA3824-6: Type of coordination 1, <math>I_q = 65 \text{ kA}</math></a>
stopping voltage [%]	<a href="#">3NA3824-6: Type of coordination 1, <math>I_q = 65 \text{ kA}</math></a>
start-up ramp time of soft starter	<a href="#">3NE1021-2: Type of coordination 2, <math>I_q = 65 \text{ kA}</math></a>
current limiting value [%] adjustable	<a href="#">3NE8024-1: Type of coordination 2, <math>I_q = 65 \text{ kA}</math></a>

• for main current circuit	100 ms
• for control circuit	100 ms
<b>insulation voltage rated value</b>	600 V
<b>degree of pollution</b>	3, acc. to IEC 60947-4-2
<b>impulse voltage rated value</b>	6 kV
<b>blocking voltage of the thyristor maximum</b>	1 400 V
<b>service factor</b>	1
<b>surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for protective separation</b>	
• between main and auxiliary circuit	600 V
<b>shock resistance</b>	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
<b>vibration resistance</b>	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC 53a
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibitance (Date)</b>	02/15/2018
<b>SVHC substance name</b>	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4
<b>Weight</b>	5.2 kg
<b>product function</b>	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• Soft Torque	Yes
• adjustable current limitation	Yes
• pump ramp down	Yes
• intrinsic device protection	Yes
• motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
• evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
• inside-delta circuit	Yes
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
• communication function	Yes
• operating measured value display	Yes; Only in conjunction with special accessories
• error logbook	Yes; Only in conjunction with special accessories
• via software parameterizable	No
• via software configurable	Yes
• <b>PROFIenergy</b>	Yes; in connection with the PROFINET Standard communication module
• <b>firmware update</b>	Yes
• <b>removable terminal for control circuit</b>	Yes
• torque control	No
• analog output	No
<b>Power Electronics</b>	
<b>operational current</b>	
• at 40 °C rated value	47 A
• at 50 °C rated value	41.6 A
• at 60 °C rated value	36.2 A
<b>operational current at inside-delta circuit</b>	
• at 40 °C rated value	81.4 A
• at 50 °C rated value	72 A
• at 60 °C rated value	62.7 A
<b>operating voltage</b>	
• rated value	200 ... 480 V
• at inside-delta circuit rated value	200 ... 480 V
<b>relative negative tolerance of the operating voltage</b>	-15 %
<b>relative positive tolerance of the operating voltage</b>	10 %
<b>relative negative tolerance of the operating voltage at inside-delta circuit</b>	-15 %
<b>relative positive tolerance of the operating voltage at inside-delta circuit</b>	10 %

<b>operating power for 3-phase motors</b>	
• at 230 V at 40 °C rated value	11 kW
• at 230 V at inside-delta circuit at 40 °C rated value	22 kW
• at 400 V at 40 °C rated value	22 kW
• at 400 V at inside-delta circuit at 40 °C rated value	45 kW
<b>Operating frequency 1 rated value</b>	50 Hz
<b>Operating frequency 2 rated value</b>	60 Hz
<b>relative negative tolerance of the operating frequency</b>	-10 %
<b>relative positive tolerance of the operating frequency</b>	10 %
<b>adjustable motor current</b>	
• at rotary coding switch on switch position 1	20 A
• at rotary coding switch on switch position 2	21.8 A
• at rotary coding switch on switch position 3	23.6 A
• at rotary coding switch on switch position 4	25.4 A
• at rotary coding switch on switch position 5	27.2 A
• at rotary coding switch on switch position 6	29 A
• at rotary coding switch on switch position 7	30.8 A
• at rotary coding switch on switch position 8	32.6 A
• at rotary coding switch on switch position 9	34.4 A
• at rotary coding switch on switch position 10	36.2 A
• at rotary coding switch on switch position 11	38 A
• at rotary coding switch on switch position 12	39.8 A
• at rotary coding switch on switch position 13	41.6 A
• at rotary coding switch on switch position 14	43.4 A
• at rotary coding switch on switch position 15	45.2 A
• at rotary coding switch on switch position 16	47 A
• minimum	20 A
<b>adjustable motor current</b>	
• for inside-delta circuit at rotary coding switch on switch position 1	34.6 A
• for inside-delta circuit at rotary coding switch on switch position 2	37.8 A
• for inside-delta circuit at rotary coding switch on switch position 3	40.9 A
• for inside-delta circuit at rotary coding switch on switch position 4	44 A
• for inside-delta circuit at rotary coding switch on switch position 5	47.1 A
• for inside-delta circuit at rotary coding switch on switch position 6	50.2 A
• for inside-delta circuit at rotary coding switch on switch position 7	53.3 A
• for inside-delta circuit at rotary coding switch on switch position 8	56.5 A
• for inside-delta circuit at rotary coding switch on switch position 9	59.6 A
• for inside-delta circuit at rotary coding switch on switch position 10	62.7 A
• for inside-delta circuit at rotary coding switch on switch position 11	65.8 A
• for inside-delta circuit at rotary coding switch on switch position 12	68.9 A
• for inside-delta circuit at rotary coding switch on switch position 13	72.1 A
• for inside-delta circuit at rotary coding switch on switch position 14	75.2 A
• for inside-delta circuit at rotary coding switch on switch position 15	78.3 A
• for inside-delta circuit at rotary coding switch on switch position 16	81.4 A
• at inside-delta circuit minimum	34.6 A
<b>minimum load [%]</b>	15 %; Relative to smallest settable $I_e$
<b>power loss [W] for rated value of the current at AC</b>	
• at 40 °C after startup	26 W
• at 50 °C after startup	24 W
• at 60 °C after startup	23 W

<b>power loss [W] at AC at current limitation 350 %</b>	
• at 40 °C during startup	606 W
• at 50 °C during startup	522 W
• at 60 °C during startup	438 W
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC/DC
<b>control supply voltage at AC</b>	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
<b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>	-20 %
<b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>	20 %
<b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>	-20 %
<b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>	20 %
<b>control supply voltage frequency</b>	50 ... 60 Hz
<b>relative negative tolerance of the control supply voltage frequency</b>	-10 %
<b>relative positive tolerance of the control supply voltage frequency</b>	10 %
<b>control supply voltage at DC rated value</b>	24 V
<b>relative negative tolerance of the control supply voltage at DC</b>	-20 %
<b>relative positive tolerance of the control supply voltage at DC</b>	20 %
<b>control supply current in standby mode rated value</b>	160 mA
<b>holding current in bypass operation rated value</b>	380 mA
<b>inrush current by closing the bypass contacts maximum</b>	7.6 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
<b>design of the overvoltage protection</b>	Varistor
<b>design of short-circuit protection for control circuit</b>	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
<b>Inputs/ Outputs</b>	
<b>number of digital inputs</b>	1
<b>number of digital outputs</b>	3
• not parameterizable	2
<b>digital output version</b>	2 normally-open contacts (NO) / 1 changeover contact (CO)
<b>number of analog outputs</b>	0
<b>switching capacity current of the relay outputs</b>	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	+/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface
<b>fastening method</b>	screw fixing
<b>height</b>	306 mm
<b>width</b>	185 mm
<b>depth</b>	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
• at the side	5 mm
<b>weight without packaging</b>	5.2 kg
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	
• for main current circuit	box terminal

• for control circuit	screw-type terminals
<b>width of connection bar maximum</b>	25 mm
<b>wire length for thermistor connection</b>	
• with conductor cross-section = 0.5 mm <sup>2</sup> maximum	50 m
• with conductor cross-section = 1.5 mm <sup>2</sup> maximum	150 m
• with conductor cross-section = 2.5 mm <sup>2</sup> maximum	250 m
<b>type of connectable conductor cross-sections for main contacts for box terminal</b>	
• using the front clamping point solid	1x (2.5 ... 16 mm <sup>2</sup> )
• using the front clamping point finely stranded with core end processing	1x (2.5 ... 50 mm <sup>2</sup> )
• using the front clamping point stranded	1x (10 ... 70 mm <sup>2</sup> )
• using the back clamping point solid	1x (2.5 ... 16 mm <sup>2</sup> )
• r box terminal using the back clamping point	1x (10 ... 2/0)
• using both clamping points solid	2x (2.5 ... 16 mm <sup>2</sup> )
• using both clamping points finely stranded with core end processing	2x (2.5 ... 35 mm <sup>2</sup> )
• using both clamping points stranded	2x (6 ... 16 mm <sup>2</sup> ), 2x (10 ... 50 mm <sup>2</sup> )
• using the back clamping point finely stranded with core end processing	1x (2.5 ... 50 mm <sup>2</sup> )
• using the back clamping point stranded	1x (10 ... 70 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections</b>	
• for control circuit solid	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
• for control circuit finely stranded with core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
• for AWG cables for control circuit solid	1x (20 ... 12), 2x (20 ... 14)
<b>wire length</b>	
• between soft starter and motor maximum	800 m
• at the digital inputs at AC maximum	100 m
• at the digital inputs at DC maximum	1 000 m
<b>tightening torque</b>	
• for main contacts with screw-type terminals	4.5 ... 6 N·m
• for auxiliary and control contacts with screw-type terminals	0.8 ... 1.2 N·m
<b>tightening torque [lbf-in]</b>	
• for main contacts with screw-type terminals	40 ... 53 lbf-in
• for auxiliary and control contacts with screw-type terminals	7 ... 10.3 lbf-in
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above
• during storage and transport	-40 ... +80 °C
<b>environmental category</b>	
• during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
• during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
<b>Environmental footprint</b>	
Global Warming Potential [CO <sub>2</sub> eq] total	296 kg
Global Warming Potential [CO <sub>2</sub> eq] during manufacturing	67.7 kg
global warming potential [CO <sub>2</sub> eq] during sales	1.84 kg
Global Warming Potential [CO <sub>2</sub> eq] during operation	242 kg
Global Warming Potential [CO <sub>2</sub> eq] after end of life	-15.7 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
<b>Electromagnetic compatibility</b>	
EMC emitted interference	acc. to IEC 60947-4-2: Class A
<b>Communication/ Protocol</b>	
<b>communication module is supported</b>	
• PROFINET standard	Yes
• EtherNet/IP	Yes
• Modbus RTU	Yes
• Modbus TCP	Yes

• PROFIBUS

Yes

## UL/CSA ratings

### manufacturer's article number

#### • of circuit breaker usable for Standard Faults

- at 460/480 V according to UL
- 60/480 V according to UL
- at 460/480 V at inside-delta circuit according to UL
- 60/480 V at inside-delta circuit according to UL
- at 575/600 V according to UL
- at 575/600 V at inside-delta circuit according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 90 A;  $I_q = 5 \text{ kA}$   
Siemens type: 3VA51, max. 60 A;  $I_q \text{ max} = 65 \text{ kA}$   
Siemens type: 3VA51, max. 90 A;  $I_q = 5 \text{ kA}$   
Siemens type: 3VA51, max. 60 A;  $I_q \text{ max} = 65 \text{ kA}$   
Siemens type: 3RV2742, max. 70 A or 3VA51, max. 90 A;  $I_q = 5 \text{ kA}$   
Siemens type: 3VA51, max. 90 A;  $I_q = 5 \text{ kA}$

#### • of the fuse

- usable for Standard Faults up to 575/600 V according to UL
- usable for High Faults up to 575/600 V according to UL
- usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL
- usable for High Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class RK5 / K5, max. 175 A;  $I_q = 5 \text{ kA}$   
Type: Class J / L, max. 175 A;  $I_q = 100 \text{ kA}$   
Type: Class RK5 / K5, max. 175 A;  $I_q = 5 \text{ kA}$   
Type: Class J / L, max. 175 A;  $I_q = 100 \text{ kA}$

### operating power [hp] for 3-phase motors

- at 200/208 V at 50 °C rated value
- at 220/230 V at 50 °C rated value
- at 460/480 V at 50 °C rated value
- at 200/208 V at inside-delta circuit at 50 °C rated value
- at 220/230 V at inside-delta circuit at 50 °C rated value
- at 460/480 V at inside-delta circuit at 50 °C rated value

10 hp  
10 hp  
30 hp  
20 hp  
25 hp  
50 hp

### contact rating of auxiliary contacts according to UL

R300-B300

### Electrical Safety

### protection class IP on the front according to IEC 60529

IP00; IP20 with cover

### touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front with cover

## Approvals Certificates

### General Product Approval



[Confirmation](#)



### EMV

### Test Certificates

### Marine / Shipping



KC

[Type Test Certificates/Test Report](#)



### Marine / Shipping

### other

### Environment



[Confirmation](#)

Siemens  
EcoTech



[Environmental Confirmations](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5224-1TC04>

### Cax online generator

<http://support.automation.siemens.com/WW/CAOrder/default.aspx?lang=en&mlfb=3RW5224-1TC04>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5224-1TC04>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5224-1TC04&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5224-1TC04&lang=en)

Characteristic: Tripping characteristics, I<sup>t</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW5224-1TC04/char>


Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5224-1TC04&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

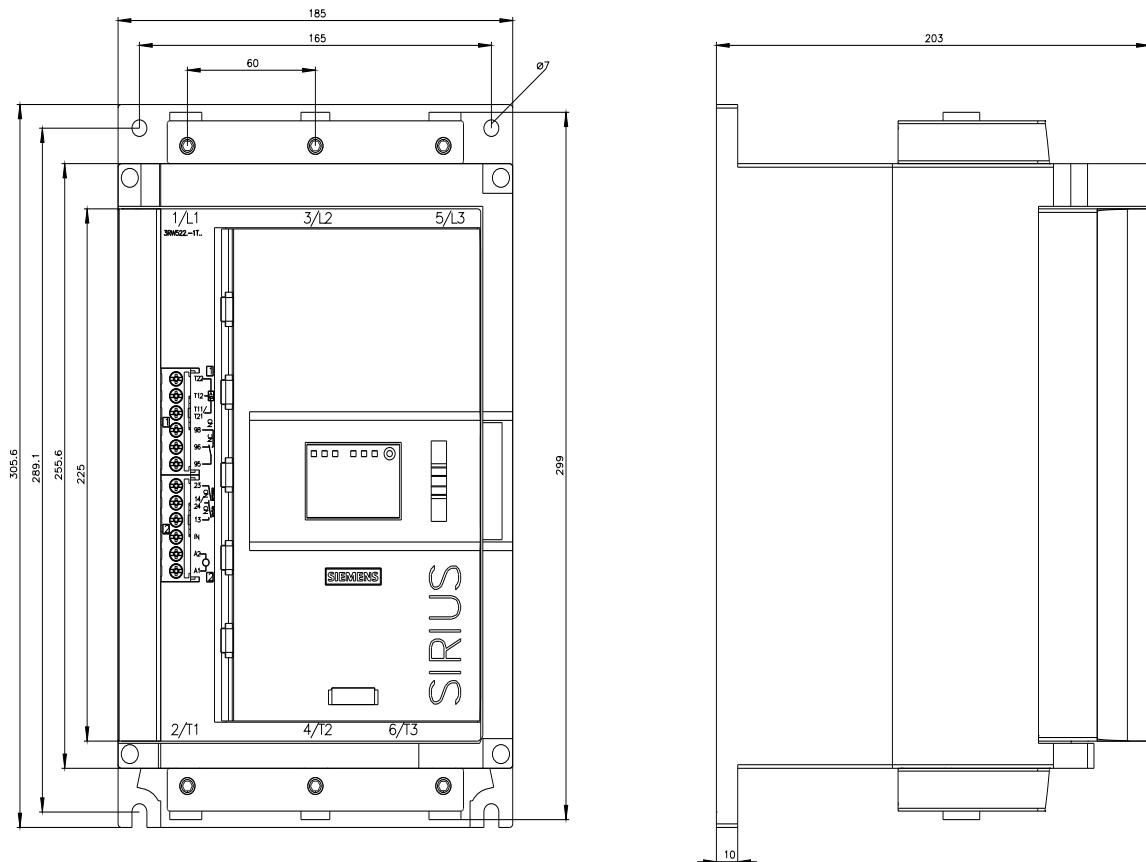

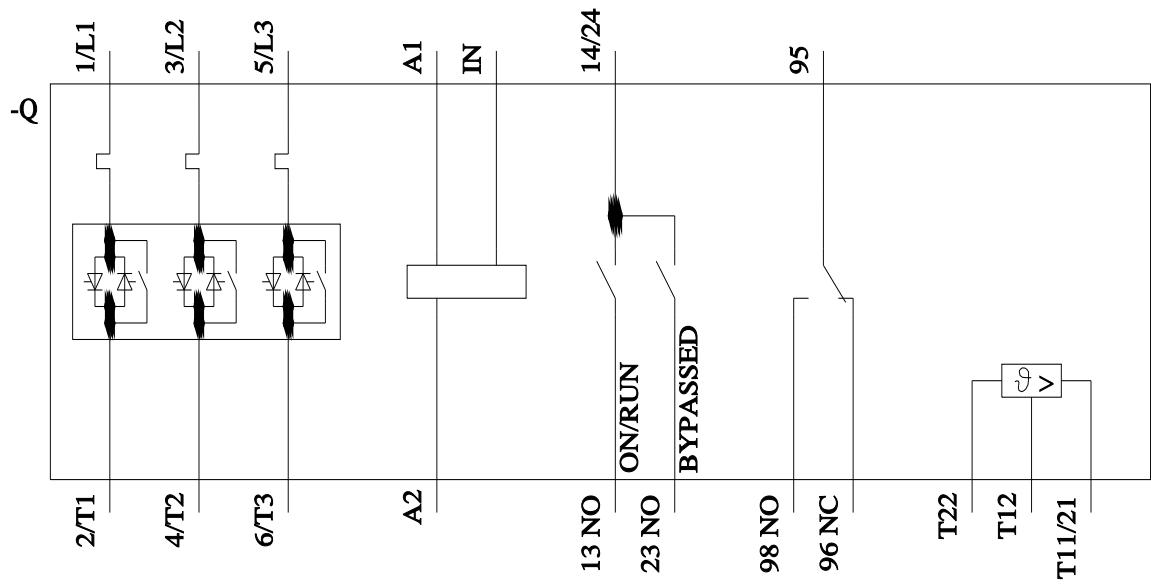

last modified:

11/9/2024 

