

Siemens
EcoTech



circuit breaker 3VA2 IEC Frame 160 breaking capacity class E Icu=200 kA @ 415 V 3-pole, motor protection ETU860M, LSIG, In=63 A overload protection Ir=25 A ... 63 A short-circuit protection Isd=1.2...15xIn, li=3...15xIn nut keeper kit



Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Motor protection
design of the overcurrent release	ETU860M
protection function of the overcurrent release	LSIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
operating power / at AC-3 / at 400 V	30 000 W
operating power / at AC-3 / at 230 V	18 500 W
power loss [W] / maximum	3.1 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	1.03 W
mechanical service life (operating cycles) / typical	25 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	14 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	9 800
electrical endurance (operating cycles) / at AC-3 / at 380/415 V	7 500
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	No
ground-fault monitoring version	Summation current formation L-conductor
product function	
• communication function	Yes
• phase failure detection	Yes
• other measurement function	Yes
Net Weight	2.298 kg
Current	
operational current	
• at 40 °C	63 A
• at 45 °C	63 A
• at 50 °C	63 A
• at 55 °C	63 A
• at 60 °C	63 A
• at 65 °C	63 A
• at 70 °C	63 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	F

maximum short-circuit current breaking capacity (Icu)	
• at 415 V	200 kA
• at 690 V	85 kA
operating short-circuit current breaking capacity (Ics)	
• at 415 V	200 kA
• at 690 V	65 kA
short-circuit current making capacity (Icm)	
• at 415 V	440 kA
• at 690 V	187 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (I _r) / of the L-trip / with I _{2t} characteristic	
• minimum	25 A
• maximum	63 A
adjustable response value delay time (t _r) / for L-tripping / with I _{2t} characteristic	
• minimum	3 s
• maximum	30 s
adjustable response value setting current (I _{sd}) / of S-trip / with I _{0t} characteristic	
• minimum	76 A
• maximum	945 A
adjustable response value delay time (t _{sd}) / for S-tripping / with I _{0t} characteristic	
• minimum	0.03 s
• maximum	0.03 s
adjustable response value setting current (I _i) / for I-tripping	
• minimum	189 A
• maximum	945 A
adjustable current response value current / for G-tripping / with standard characteristic	
• initial value	13 A
• full-scale value	63 A
adjustable response value delay time (t _g) / for G-tripping / with I _{0t} characteristic	
• maximum	0.8 s
adjustable response value setting current (I _g) / for G-tripping / with I _{2t} characteristic	
• minimum	13 A
• maximum	63 A
adjustable response value delay time (t _g) / for G-tripping / with I _{2t} characteristic	
• minimum	0.05 s
• maximum	0.8 s
adjustable setting current (I _{nN}) / for N-tripping	
• minimum	0 A
• maximum	0 A
product function / grounding protection	Yes
adjustable trip class (T _c CLASS)	10A, 10/10E, 20/ 20E, 30/30E
tripping time (T _p) / with adjustable trip class (T _c CLASS)	
• minimum	3 s
• maximum	30 s
Mechanical Design	
product component	
• undervoltage release	No
• voltage trigger	No
• trip indicator	No
height [in]	7.13 in
height	181 mm
width [in]	4.13 in
width	105 mm
depth [in]	3.39 in

depth	86 mm
Connections	
arrangement of electrical connectors / for main current circuit	Front terminal
type of electrical connection / for main current circuit	on both sides nut keeper kit
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	13 x 1 mm
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	25 x 8 mm
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	tin
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	tin

Auxiliary circuit	
number of CO contacts / for auxiliary contacts	0

Accessories	
product extension / optional / motor drive	Yes

Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C

Environmental footprint	
global warming potential [CO2 eq] / total	61.814 kg
global warming potential [CO2 eq] / during manufacturing	14.6 kg
global warming potential [CO2 eq] / during operation	48.9 kg
global warming potential [CO2 eq] / after end of life	-2.2 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
reference code / according to IEC 81346-2	Q

Approvals / Certificates	
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)

General Product Approval	EMV	Test Certificates	Marine / Shipping
--------------------------	-----	-------------------	-------------------



[Special Test Certificate](#)

[Miscellaneous](#)



Marine / Shipping	other	Dangerous goods	Environment
-------------------	-------	-----------------	-------------

[CCS \(China Classification Society\)](#)

[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)

[Transport Information](#)



Environment			
--------------------	--	--	--

Siemens
EcoTech



[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

<http://www.siemens.com/lowvoltage/catalogs>


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2163-0MQ32-0AA0>


<https://support.industry.siemens.com/cs/ww/en/ps/3VA2163-0MQ32-0AA0>

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2163-0MQ32-0AA0

<http://www.siemens.com/cax>

<http://www.siemens.com/specifications>



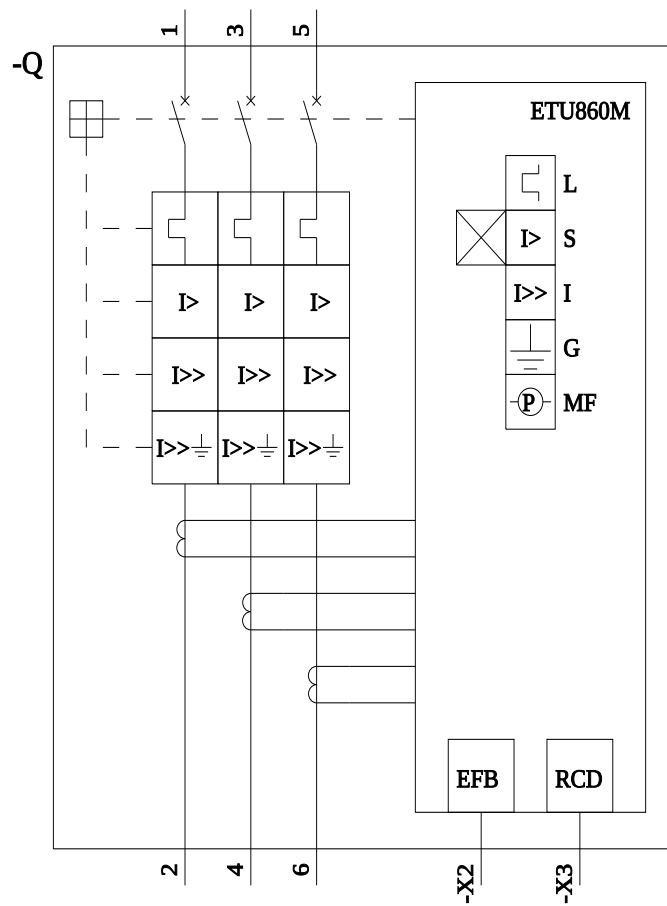

last modified:

10/24/2024

