



MLFB-Ordering data 1FK7043-4CH71-1PA0

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :






Engineering data		Mechanical data	
Rated speed (100 K)	4500 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	6	Motor type	High Dynamic
Rated torque (100 K)	2.6 Nm	Shaft height	48
Rated current	3.3 A	Cooling	Natural cooling
Static torque (60 K)	2.90 Nm	Radial runout tolerance	0.040 mm
Static torque (100 K)	3.50 Nm	Concentricity tolerance	0.08 mm
Stall current (60 K)	3.30 A	Axial runout tolerance	0.08 mm
Stall current (100 K)	4.10 A	Vibration severity grade	Grade A
Moment of inertia	1.000 kgcm²	Connector size	1
Efficiency	90.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	0.85 Nm/A	Temperature monitoring	Pt1000 temperature sensor
Voltage constant at 20° C	54.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	1.20 Ω	Color of the housing	Standard (Anthracite RAL 7016)
Rotating field inductance	13.6 mH	Holding brake	without holding brake
Electrical time constant	11.30 ms	Shaft end	Feather key
Mechanical time constant	0.49 ms	Encoder system	Resolver R14DQ: resolver 14 bits (resolution 16384, internal 2-pole)
Thermal time constant	40 min		
Shaft torsional stiffness	11400 Nm/rad		
Net weight of the motor	6.0 kg		




Figure similar

MLFB-Ordering data 1FK7043-4CH71-1PA0

Optimum operating point		Recommended Motor Module	
Optimum speed	4500 rpm	Rated inverter current	5 A
Optimum power	1.2 kW	Maximum inverter current	15 A
Limiting data		Maximum torque	10.00 Nm
Max. permissible speed (mech.)	9000 rpm		
Max. permissible speed (inverter)	9000 rpm		
Maximum torque	10.0 Nm		
Maximum current	12.5 A		

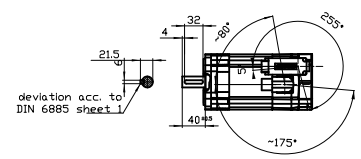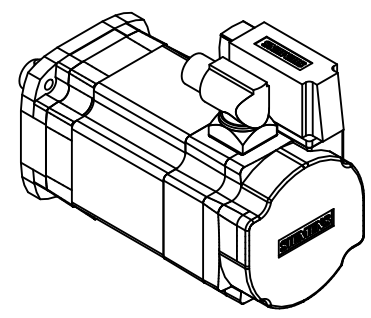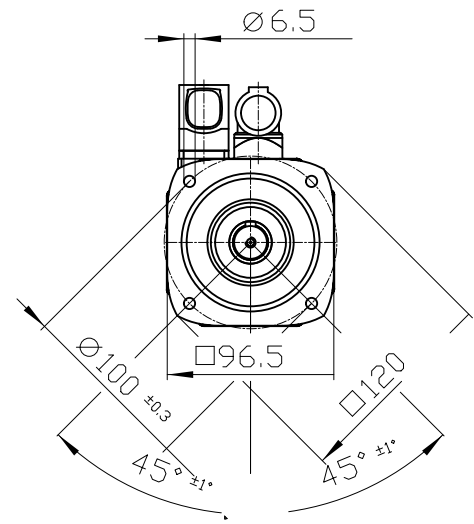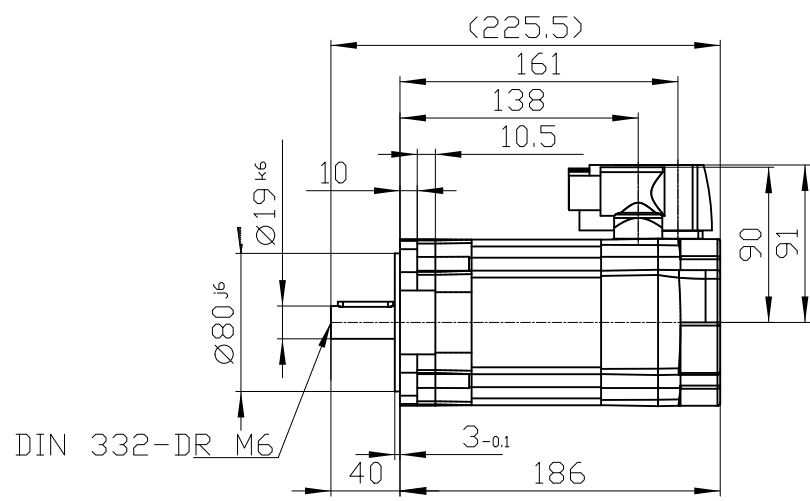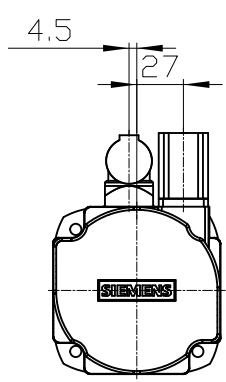

Connector size 1 = M23;
6-pole for power and brake



Unit	mm [in]	1FK7043-4CH71-1PA0	
Date	7/31/23		
SIEMENS AG			
		DT	

Copyright© Siemens AG 2005
The reproduction or use of this document or its contents is not permitted without express written authority. Siemens AG is not liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Copyright© Siemens AG 2005
Confido a titre de secret d'entreprise. Tous droits réservés. Confiado como secreto industrial. Nos reservamos todos los derechos. Comunicado como segredo empresarial. Reservados todos os direitos.

Copyright© Siemens AG 2005
Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder der Eintragung.