

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data 1FK7064-4CC71-1QG0

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :





Engineering data		Mechanical data	
Rated speed (100 K)	2000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	6	Motor type	High Dynamic
Rated torque (100 K)	10.0 Nm	Shaft height	63
Rated current	7.1 A	Cooling	Natural cooling
Static torque (60 K)	10.00 Nm	Radial runout tolerance	0.040 mm
Static torque (100 K)	12.00 Nm	Concentricity tolerance	0.10 mm
Stall current (60 K)	6.60 A	Axial runout tolerance	0.10 mm
Stall current (100 K)	8.10 A	Vibration severity grade	Grade A
Moment of inertia	7.500 kgcm²	Connector size	1
Efficiency	93.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	1.48 Nm/A	Temperature monitoring	Pt1000 temperature sensor
Voltage constant at 20° C	94.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	0.58 Ω	Color of the housing	Standard (Anthracite RAL 7016)
Rotating field inductance	21.5 mH	Holding brake	without holding brake
Electrical time constant	37.00 ms	Shaft end	Plain shaft
Mechanical time constant	0.60 ms	Encoder system	Encoder AS20DQI: absolute encoder single-turn 20 bits
Thermal time constant	55 min		
Shaft torsional stiffness	29500 Nm/rad		
Net weight of the motor	15.4 kg		





Figure similar

MLFB-Ordering data 1FK7064-4CC71-1QG0

Optimum operating point		Recommended Motor Module	
Optimum speed	2000 rpm	Rated inverter current	9 A
Optimum power	2.1 kW	Maximum inverter current	27 A
Limiting data		Maximum torque	32.00 Nm
Max. permissible speed (mech.)	7500 rpm		
Max. permissible speed (inverter)	6150 rpm		
Maximum torque	32.0 Nm		
Maximum current	25.0 A		

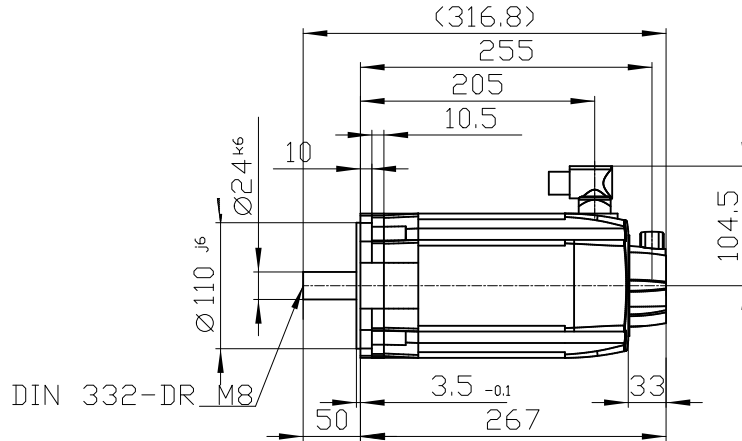

Connector size 1 = M23;
6-pole for power and brake

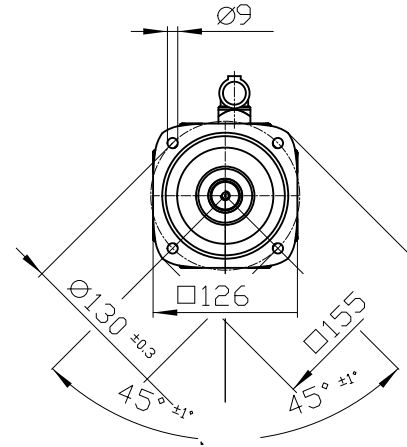

	-	
	-	
Unit	mm [in]	1FK7064-4CC71-1QG0
Date	6/20/23	
SIEMENS AG		-
-		DT