

No image
available for this
configuration.

Figure similar

MLFB-Ordering data 1FK7103-5AC71-1FG2






Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :


Engineering data		Mechanical data	
Rated speed (100 K)	2000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	8	Motor type	Compact
Rated torque (100 K)	25.0 Nm	Shaft height	100
Rated current	11.5 A	Cooling	Natural cooling
Static torque (60 K)	30.00 Nm	Radial runout tolerance	0.050 mm
Static torque (100 K)	36.00 Nm	Concentricity tolerance	0.10 mm
Stall current (60 K)	12.00 A	Axial runout tolerance	0.10 mm
Stall current (100 K)	14.70 A	Vibration severity grade	Grade A
Moment of inertia	105.000 kgcm ²	Connector size	1.5
Efficiency	93.0 %	Degree of protection	IP65 and DE flange IP67
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	2.45 Nm/A	Temperature monitoring	KTY84 temperature sensor in the stator winding
Voltage constant at 20° C	156.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	0.28 Ω	Color of the housing	without
Rotating field inductance	6.5 mH	Holding brake	without holding brake
Electrical time constant	23.00 ms	Shaft end	Plain shaft
Mechanical time constant	1.50 ms	Encoder system	Encoder AM22DQ: absolute encoder 22 bits (resolution 4194304, encoder-internal 2048 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)
Thermal time constant	65 min		
Shaft torsional stiffness	149000 Nm/rad		
Net weight of the motor	29.0 kg		

MLFB-Ordering data 1FK7103-5AC71-1FG2

Optimum operating point		Recommended Motor Module	
Optimum speed	2000 rpm	Rated inverter current	18 A
Optimum power	5.2 kW	Maximum inverter current	36 A
Limiting data		Maximum torque	86.00 Nm
Max. permissible speed (mech.)	5000 rpm		
Max. permissible speed (inverter)	3700 rpm		
Maximum torque	108.0 Nm		
Maximum current	46.0 A		

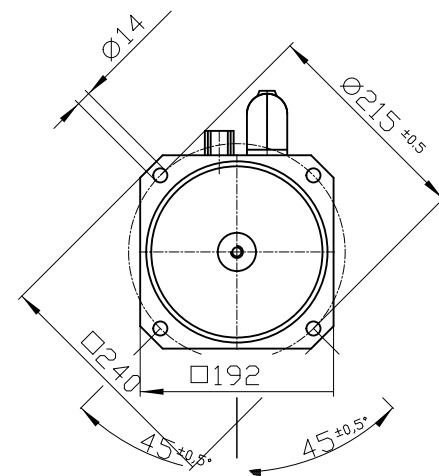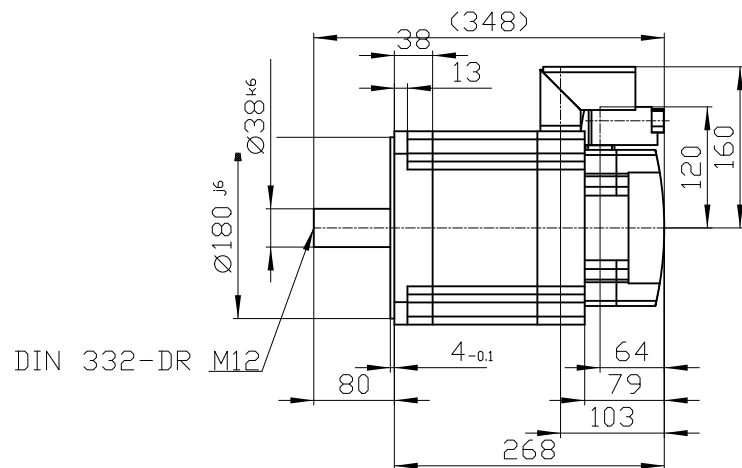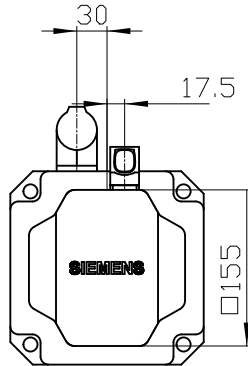

Connector size 1.5 = M40;
6-pole for power and brake

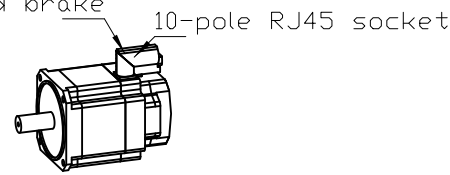

10-pole RJ45 socket

Unit	mm [in]	1FK7103-5AC71-1FG2	
Date	4/3/23		
SIEMENS AG			
		DT	