



circular conduc. terminal TA2.2 50...240 mm² large; 3 units accessory for: 3VA12

Model			
product brand name	SETRON		
product designation	circular conductor terminal		
accessories	Wire connector		
General technical data			
designation / of the terminal	TA2.2		
type of electrical connection / with control wire tap	No		
Connections according IEC			
connectable conductor cross-section			
• for copper cable / stranded / minimum	50 mm²		
• for copper cable / stranded / maximum	240 mm²		
• for aluminum cable / stranded / minimum	50 mm²		
• for aluminum cable / stranded / maximum	240 mm²		
stripped length	30,5 mm		
tightening torque / when using copper cables			
• stranded	50 - 240 mm²: 31.1 Nm		
• finely stranded	50 - 185 mm²: 31.1 Nm		
Connetctions according UL			
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C		
stripped length	1.2 in		
connectable conductor cross-section			
• for copper cable / stranded / minimum	2 AWG		
• for copper cable / stranded / maximum	350 kcmil		
• for aluminum cable / stranded / minimum	2 AWG		
• for aluminum cable / stranded / maximum	350 kcmil		
Certificates			
General Product Approval		EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Environment
-------------------	-------	-------------



LRS

[Confirmation](#)

[Miscellaneous](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9213-0JJ13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9213-0JJ13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9213-0JJ13

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

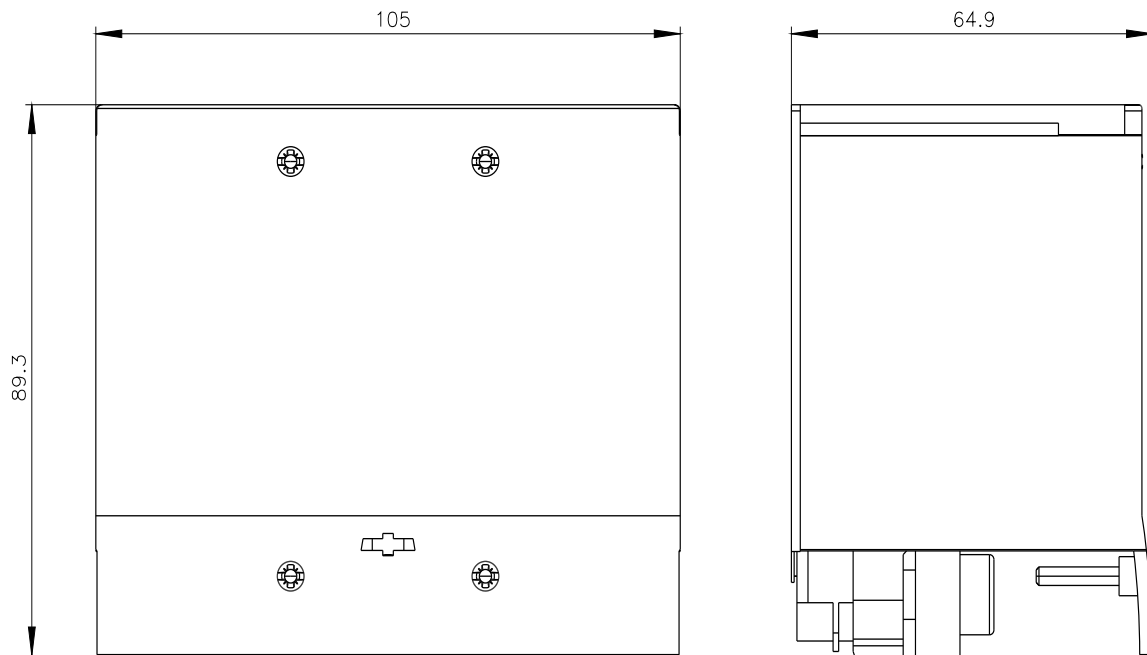

last modified:

8/9/2024 

