



Figure similar

SIRIUS soft starter 200-480 V 25 A, 24 V AC/DC spring-type terminals Fail-safe

product brand name

SIRIUS

product category

Hybrid switching devices

product designation

Failsafe soft starters

product type designation

3RW55

manufacturer's article number

- of high feature HMI module usable
- of communication module PROFINET standard usable
- of communication module PROFINET high-feature usable
- of communication module PROFIBUS usable
- of communication module Modbus TCP usable
- of communication module Modbus RTU usable
- of communication module Ethernet/IP
- of circuit breaker usable at 400 V
- of circuit breaker usable at 500 V
- of circuit breaker usable at 400 V at inside-delta circuit
- of circuit breaker usable at 500 V at inside-delta circuit
- of the gG fuse usable up to 690 V
- of the gG fuse usable at inside-delta circuit up to 500 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V
- of the redundant contactor for applications > SIL 1 according to EN 62061
- of the redundant contactor for applications > SIL 1 at inside-delta circuit according to EN 62061
- of the redundant contactor for applications > SIL 1 according to EN ISO 13849-1
- of the redundant contactor for applications > SIL 1 at inside-delta circuit according to EN ISO 13849-1

[SIRIUS](#)

[Hybrid switching devices](#)

[Failsafe soft starters](#)

[3RW55](#)

[3RW5980-0HF00](#)

[3RW5980-0CS00](#)

[3RW5950-0CH00](#)

[3RW5980-0CP00](#)

[3RW5980-0CT00](#)

[3RW5980-0CR00](#)

[3RW5980-0CE00](#)

[3RV2032-4EA10](#); Type of coordination 1, $I_q = 65 \text{ kA}$, CLASS 10

[3RV2032-4EA10](#); Type of coordination 1, $I_q = 15 \text{ kA}$, CLASS 10

[3RV2032-4VA10](#); Type of coordination 1, $I_q = 65 \text{ kA}$, CLASS 10

[3RV2032-4VA10](#); Type of coordination 1, $I_q = 15 \text{ kA}$, CLASS 10

[3NA3822-6](#); Type of coordination 1, $I_q = 65 \text{ kA}$

[3NA3822-6](#); Type of coordination 1, $I_q = 65 \text{ kA}$

[3NE1817-0](#); Type of coordination 2, $I_q = 65 \text{ kA}$

[3NE8021-1](#); Type of coordination 2, $I_q = 65 \text{ kA}$

[3RT2035](#)

[3RT2035](#)

[3RT2036](#)

[3RT2036](#)

General technical data

starting voltage [%]

20 ... 100 %

stopping voltage [%]

50 %; non-adjustable

start-up ramp time of soft starter

0 ... 360 s

ramp-down time of soft starter

0 ... 360 s

start torque [%]

10 ... 100 %

stopping torque [%]

10 ... 100 %

torque limitation [%]

20 ... 200 %

current limiting value [%] adjustable	125 ... 800 %
breakaway voltage [%] adjustable	40 ... 100 %
breakaway time adjustable	0 ... 2 s
number of parameter sets	3
accuracy class according to IEC 61557-12	5 %
certificate of suitability	
• CE marking	Yes
• UL approval	Yes
• CSA approval	Yes
product component	
• HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 ... 60 %
ground-fault monitoring limiting value [%]	10 ... 95 %
buffering time in the event of power failure	
• for main current circuit	100 ms
• for control circuit	100 ms
idle time adjustable	0 ... 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 ... 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	11/22/2019
product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• breakaway pulse	Yes
• adjustable current limitation	Yes
• creep speed in both directions of rotation	Yes
• pump ramp down	Yes
• DC braking	Yes
• motor heating	Yes
• slave pointer function	Yes
• trace function	Yes
• intrinsic device protection	Yes
• motor overload protection	Yes
	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
• evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
• inside-delta circuit	Yes
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes
• communication function	Yes
• operating measured value display	Yes
• event list	Yes
• error logbook	Yes
• via software parameterizable	Yes
• via software configurable	Yes
• screw terminal	No
• spring-loaded terminal	Yes
• PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-

● firmware update	Yes
● removable terminal for control circuit	Yes
● voltage ramp	Yes
● torque control	Yes
● combined braking	Yes
● analog output	Yes; 4 ... 20 mA (default) / 0 ... 10 V
● programmable control inputs/outputs	Yes
● condition monitoring	Yes
● automatic parameterisation	Yes
● application wizards	Yes
● alternative run-down	Yes
● emergency operation mode	Yes
● reversing operation	Yes
● soft starting at heavy starting conditions	Yes
Power Electronics	
operational current	
● at 40 °C rated value	25 A
● at 40 °C rated value minimum	5 A
● at 50 °C rated value	22.3 A
● at 60 °C rated value	19.6 A
operational current at inside-delta circuit	
● at 40 °C rated value	43.3 A
● at 50 °C rated value	39 A
● at 60 °C rated value	33.9 A
operating voltage	
● rated value	200 ... 480 V
● at inside-delta circuit rated value	200 ... 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
● at 230 V at 40 °C rated value	5.5 kW
● at 230 V at inside-delta circuit at 40 °C rated value	11 kW
● at 400 V at 40 °C rated value	11 kW
● at 400 V at inside-delta circuit at 40 °C rated value	18.5 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
minimum load [%]	10 %; Relative to set I_e
power loss [W] for rated value of the current at AC	
● at 40 °C after startup	8 W
● at 50 °C after startup	7 W
● at 60 °C after startup	6 W
power loss [W] at AC at current limitation 350 %	
● at 40 °C during startup	364 W
● at 50 °C during startup	309 W
● at 60 °C during startup	262 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
● at 50 Hz rated value	24 V
● at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %

relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 ... 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage	
• at DC rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	420 mA
holding current in bypass operation rated value	820 mA
inrush current by closing the bypass contacts maximum	0.91 A
inrush current peak at application of control supply voltage maximum	7.5 A
duration of inrush current peak at application of control supply voltage	20 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse ($I_{cu}=1$ kA), 6 A quick-acting fuse ($I_{cu}=1$ kA), C1 miniature circuit breaker ($I_{cu}= 600$ A), C6 miniature circuit breaker ($I_{cu}= 300$ A); Is not part of scope of supply

Inputs/ Outputs

number of digital inputs	4
• with fail-safe	1
• parameterizable	4
number of digital outputs	3
• Number of digital outputs with fail-safe	1
• number of digital outputs parameterizable	2
• number of digital outputs not parameterizable	1
digital output version	2 normally-open contacts (NO) / 1 normally-closed contact (NC) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A

Response times

OFF-delay time with safety-related request when switched off via control inputs maximum	100 ms
---	--------

Installation/ mounting/ dimensions

mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	275 mm
width	170 mm
depth	152 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
• at the side	5 mm
weight without packaging	2.3 kg

Connections/ Terminals

type of electrical connection	screw-type terminals spring-loaded terminals
• for main current circuit	
• for control circuit	
wire length for thermistor connection	
• with conductor cross-section = 0.5 mm ² maximum	50 m
• with conductor cross-section = 1.5 mm ² maximum	150 m
• with conductor cross-section = 2.5 mm ² maximum	250 m
type of connectable conductor cross-sections	
• for main contacts	

— solid	2x (1.0 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²)
— finely stranded with core end processing	2x (1.0 ... 2.5 mm ²), 2x (2.5 ... 6.0 mm ²)
• at AWG cables for main current circuit solid	2x (16 ... 12), 2x (14 ... 8)
type of connectable conductor cross-sections	
• for control circuit solid	2x (0.25 ... 1.5 mm ²)
• for control circuit finely stranded with core end processing	2x (0.25 ... 1.5 mm ²)
• at AWG cables for control circuit solid	2x (24 ... 16)
• at AWG cables for control circuit finely stranded with core end processing	2x (24 ... 16)
wire length	
• between soft starter and motor maximum	800 m
• at the digital inputs at DC maximum	1 000 m
tightening torque	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
• for auxiliary and control contacts with screw-type terminals	0.8 ... 1.2 N·m
tightening torque [lbf·in]	
• for main contacts with screw-type terminals	18 ... 22 lbf·in
• for auxiliary and control contacts with screw-type terminals	7 ... 10.3 lbf·in

Ambient conditions	
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog
ambient temperature	
• during operation	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above
• during storage and transport	-40 ... +80 °C
environmental category	
• during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
• during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A

Communication/ Protocol	
communication module is supported	
• PROFINET standard	Yes
• PROFINET high-feature	Yes
• EtherNet/IP	Yes
• Modbus RTU	Yes
• Modbus TCP	Yes
• PROFIBUS	Yes

UL/CSA ratings	
manufacturer's article number	
• of circuit breaker	
— usable for Standard Faults at 460/480 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA
— usable for High Faults at 460/480 V according to UL	Siemens type: 3RV2742, max. 40 A or 3VA51, max. 60 A; Iq max = 65 kA
— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA
— usable for High Faults at 460/480 V at inside-delta circuit according to UL	Siemens type: 3VA51, max. 60 A; Iq max = 65 kA
— usable for Standard Faults at 575/600 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA
— usable for High Faults at 575/600 V at inside-delta circuit according to UL	Siemens type: 3VA51, max. 60 A; Iq max = 65 kA
— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA
• of the fuse	
— usable for Standard Faults up to 575/600 V according to UL	Type: Class RK5 / K5, max. 100 A; Iq = 5 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 100 A; Iq = 100 kA
— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class RK5 / K5, max. 100 A; Iq = 5 kA

— usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 100 A; I _q = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	5 hp
• at 220/230 V at 50 °C rated value	7.5 hp
• at 460/480 V at 50 °C rated value	15 hp
• at 200/208 V at inside-delta circuit at 50 °C rated value	10 hp
• at 220/230 V at inside-delta circuit at 50 °C rated value	10 hp
• at 460/480 V at inside-delta circuit at 50 °C rated value	25 hp
contact rating of auxiliary contacts according to UL	R300-B300

Safety related data	
safety device type according to IEC 61508-2	Type B
B10d value	1 588 000
Safety Integrity Level (SIL)	
• according to IEC 61508	SIL1
SIL Claim Limit (subsystem) according to EN 62061	SIL 1
performance level (PL) according to EN ISO 13849-1	c
category according to EN ISO 13849-1	2
stop category according to EN 60204-1	0
Safe failure fraction (SFF)	60 %
average diagnostic coverage level (DCavg)	90 %
diagnostics test interval by internal test function maximum	1 000 s
PFHD with high demand rate according to EN 62061	1E-6 1/h
PFDavg with low demand rate according to IEC 61508	0.09
hardware fault tolerance according to IEC 61508	0
T1 value for proof test interval or service life according to IEC 61508	20 a
safe state	Open load circuit
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
electromagnetic compatibility	acc. to IEC 60947-4-2

ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
• according to ATEX directive 2014/34/EU	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate according to EN 62061 relating to ATEX	5E-7 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a

Certificates/ approvals	
General Product Approval	



[Confirmation](#)



EMC	For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
------------	---------------------------------------	----------------------------------	--------------------------	--------------------------



IECEx



EG-Konf.

[Type Test Certificates/Test Report](#)

ABS

Marine / Shipping


other




LRS

[Confirmation](#)

Further information

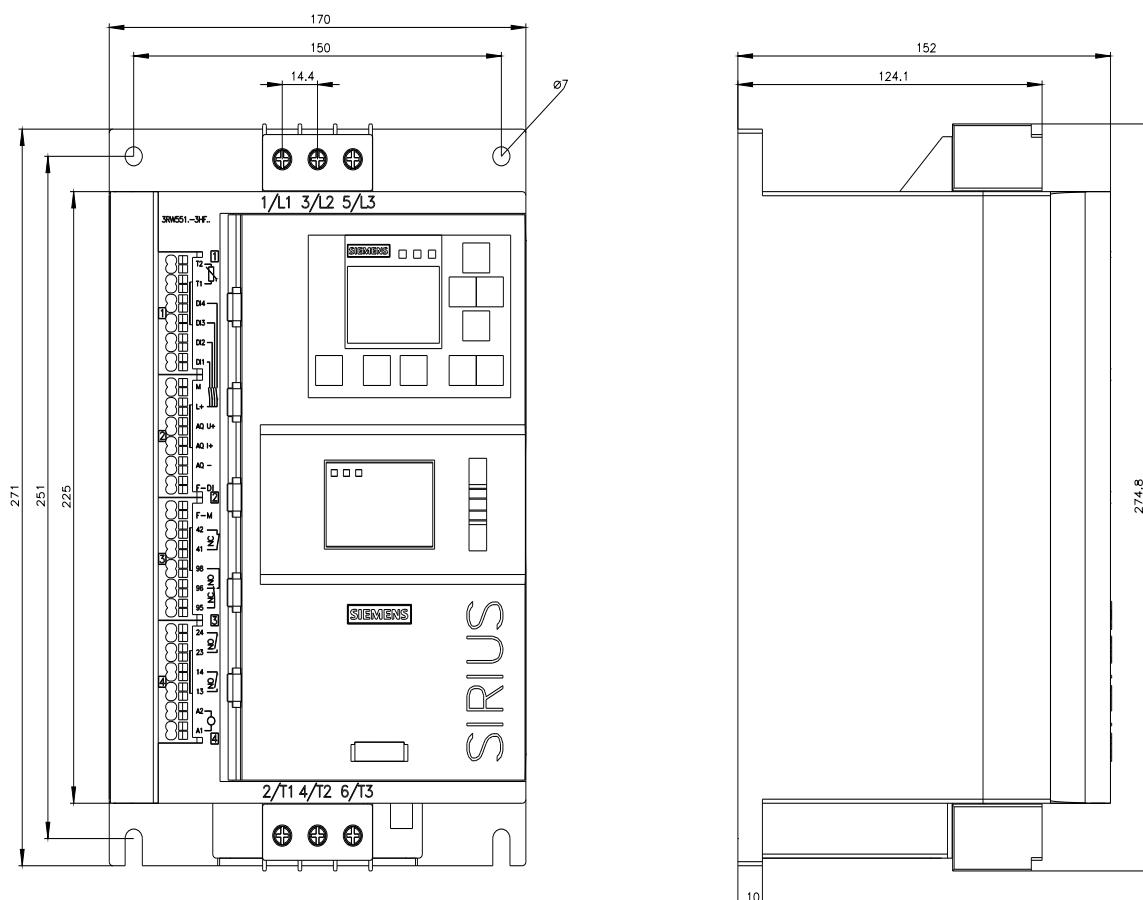Information on the packaging<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5515-3HF04>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5515-3HF04>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3RW5515-3HF04>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5515-3HF04&lang=en**Characteristic: Tripping characteristics, I²t, Let-through current**<https://support.industry.siemens.com/cs/ww/en/ps/3RW5515-3HF04/char>**Characteristic: Installation altitude**<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5515-3HF04&objecttype=14&gridview=view1>**Simulation Tool for Soft Starters (STS)**<https://support.industry.siemens.com/cs/ww/en/view/101494917>

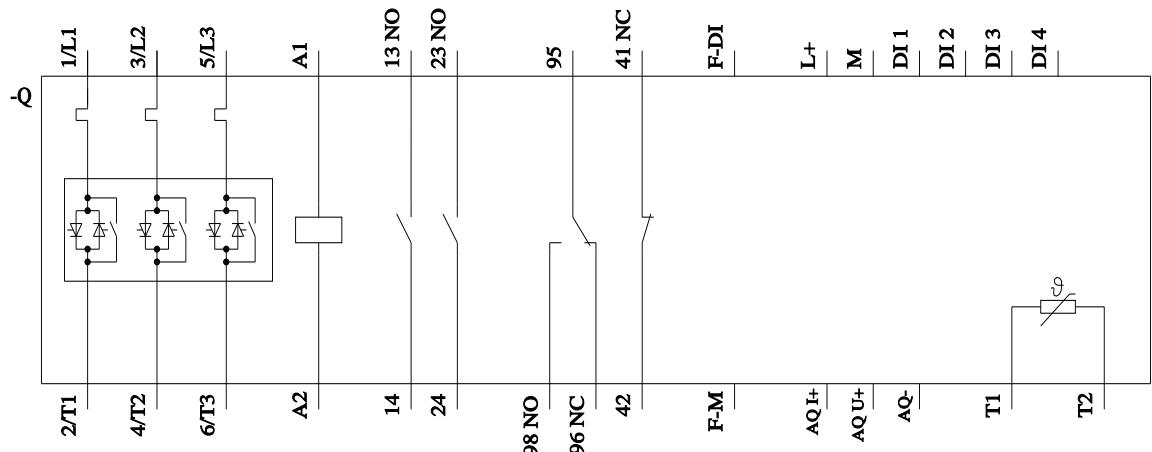

last modified:

1/13/2023

