

Data sheet for SINAMICS G130

MLFB-Ordering data: 6SL3310-1GE37-5AA3



Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

Rated data	
------------	--

Input

Supply frequency	47...63 Hz
Input supply voltage	400 V $\pm 10\%$
Rated input current	775 A
Max. current	1188 A
Pulse number	6
Regenerative capability	No (2Q)

Output:

Output voltage	400 V
Rated output (LO) in kW	400 kW
Rated power (HO) in kW	315 kW
Rated output current	745 A
Rated output current (LO)	725 A
Rated output current (HO)	570 A
Output current Max	1087 A
Pulse frequency (default setting)	1.25 kHz

Basic data:


Power losses ΔP	9.53 kW
Sound pressure level L_{pA} (1 m)	70 dB
Conductor cross section, max. (IEC)	4 x 240 mm ²
Degree of protection	IP00
Dimensions (H x W x D)	1506 mm x 503 mm x 540 mm
Weight approx.	294 kg
Frame size	HX

Environmental conditions	
--------------------------	--

Installation altitude	1000 m
Coolant	Air
Air cooling requirements	0.78 m ³ /s
Ambient temperature	0 °C - +40 °C

Converter losses to IEC61800-9-2*	
-----------------------------------	--

Efficiency class IE2
Comparison with the reference converter (90% / 100%) 45.2 %

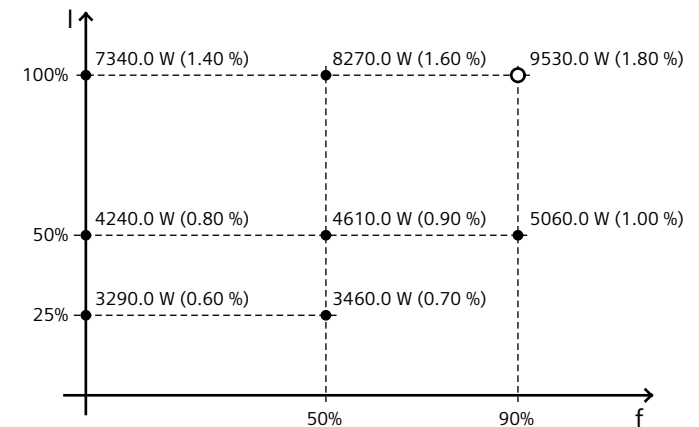

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

Special design

Supplementary system components

6SL30401GA011AA0 - Control Unit Kit CU320-2 PN (PROFINET, EtherNet/IP)