

box terminal; 3 units accessory for: 3VA13/14; 3VA23/24



Model	
product brand name	SETRON
product designation	box terminal 3 units
accessories	Box terminal
General technical data	
designation / of the terminal	TS1.5
type of electrical connection / with control wire tap	No
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	35 mm²
• for copper cable / stranded / maximum	300 mm²
stripped length	26.5 mm
tightening torque / when using copper cables	
• stranded	35 - 95 mm²: 16 Nm, 120 - 300 mm²: 28 Nm
• finely stranded	35 - 95 mm²: 16 Nm, 120 - 240 mm²: 28 Nm
Connetctions according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	1.05 in
connectable conductor cross-section	
• for copper cable / stranded / minimum	1/0 AWG
• for copper cable / stranded / maximum	500 kcmil
Certificates	
General Product Approval	
EMV	
Test Certificates	
 EG-Konf.  Miscellaneous   RCM Type Test Certificates/Test Report	
Marine / Shipping	other
Environment	
 LRS Confirmation Miscellaneous Miscellaneous  EPD Environmental Confirmations	
Environment	

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9483-0JA13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9483-0JA13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9483-0JA13

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

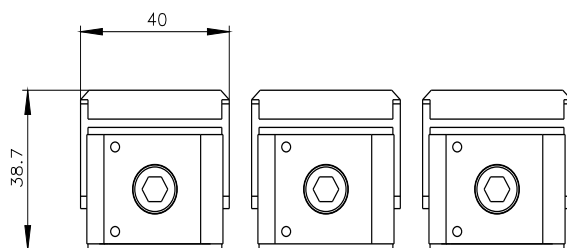

last modified:

8/9/2024 

