



Switch disconnector 100 A, Size 2, 3-pole Front operating mechanism left  
Complete unit with direct operating mechanism gray flat terminal incl. phase  
barriers

Model	
product brand name	SENTRON
product designation	3KD switch disconnector
design of the product	Switch
display version for switch position indicator manual operation	ON-OFF-TEST
design of the actuating element	Long rotary knob
type of the driving mechanism	Front operating mechanism
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
type of device	fixed mounting
size of switch disconnector	2
mechanical service life (operating cycles) typical	15 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	1 500
• at DC-23 A at 440 V	1 500
I <sub>2t</sub> value	
• with closed switch at 1000 V for combination switch +gG/aM SITOR fuse maximum	19 815 A <sup>2</sup> ·s
• of the fuse at 500 V maximum permissible	223 005 A <sup>2</sup> ·s
• of the gG fuse at 690 V maximum permissible	226 005 A <sup>2</sup> ·s
• of the gG/aM SITOR fuse at 1000 V maximum permissible	48 000 A <sup>2</sup> ·s
• of the molded case circuit breaker at 415 V maximum permissible	1 750 000 A <sup>2</sup> ·s
position of the switch operating mechanism	at the left end
overvoltage in percent relative to the operating voltage at AC at 400, 500, 690 V at 50/60 Hz	10 %
overvoltage category	III
degree of pollution	3
Voltage	
operating voltage with current paths in series	
• with degree of pollution 2 at DC rated value	440 V / 3
• with degree of pollution 3 at DC rated value	440 V / 3
insulation voltage	
• rated value	1 000 V
surge voltage resistance rated value	8 kV
operational current at AC-22 A at 1000 V maximum	100 A
let-through current of the fuse at 500 V maximum permissible	25 700 A
let-through current of the gG fuse at 690 V maximum	29 500 A

<b>permissible</b>	
<b>Supply voltage</b>	
operating voltage at AC rated value	1 000 V
<b>Protection class</b>	
<b>protection class IP</b>	IP00
<b>protection class IP</b>	
• with closed switch with cover or cable lug cover	IP20
• on the front	IP00
<b>Dissipation</b>	
<b>power loss [W]</b>	
• with conventional rated thermal current per pole	1.8 W
• with conventional rated thermal current per device	5.4 W
• for rated value of the current at AC in hot operating state per pole	1.8 W
<b>Main circuit</b>	
<b>operating power</b>	
• at AC-23 A at 500 V rated value	55 kW
operational current rated value	100 A
<b>Auxiliary circuit</b>	
<b>number of connected NC contacts for auxiliary contacts</b>	0
<b>number of connected NO contacts for auxiliary contacts</b>	0
<b>number of connected CO contacts for auxiliary contacts</b>	0
number of CO contacts for auxiliary contacts	4
<b>number of NC contacts for auxiliary contacts</b>	0
<b>number of NO contacts for auxiliary contacts</b>	0
<b>Suitability</b>	
<b>suitability for use main switch</b>	Yes
<b>suitability for use switch disconnector</b>	Yes
<b>suitability for use EMERGENCY OFF switch</b>	No
<b>suitability for use safety switch</b>	Yes
<b>suitability for use maintenance/repair switch</b>	Yes
<b>Product details</b>	
<b>product feature interlock</b>	Yes
product component	
• trip indicator	No
• voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
product extension auxiliary switch	Yes
<b>product extension optional</b>	
• motor drive	No
• voltage trigger	No
<b>Short circuit</b>	
<b>short-time withstand current (Icw) at 1000 V AC/440 V DC limited to 1 s rated value</b>	4 kA
<b>short-circuit current making capacity (Icm) for switch disconnector</b>	
• at 400 V AC without fuse link rated value minimum	30 kA
• at 1000 V AC without fuse link rated value minimum	12 kA
• at DC 440 V without fuse link rated value minimum	12 kA
• without fuse link rated value minimum	12 kA
<b>conditional short-circuit current with line-side fuse protection</b>	
• at 415 V by molded case circuit breaker rated value	65 kA
• at 500 V by gG fuse rated value	100 kA
• at 690 V by gG fuse rated value	100 kA
<b>Connections</b>	
<b>type of connectable conductor cross-sections for aluminum conductor</b>	
• stranded with lug	1x (10 ... 70 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections</b>	
• with combination of AI conductor+switch	100A / 70mm <sup>2</sup>

• for copper busbar	'1x (20x3 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections for copper conductor</b>	
• stranded with lug according to DIN 46234	1x (2.5 ... 95 mm <sup>2</sup> ), 2x (25 ... 50 mm <sup>2</sup> )
• stranded with lug according to DIN 46235	1x (25 ... 70 mm <sup>2</sup> ), 2x (25 ... 50 mm <sup>2</sup> )
<b>type of electrical connection for main current circuit</b>	flat connector
<b>Mechanical Design</b>	
<b>height</b>	168 mm
<b>width</b>	121 mm
<b>depth</b>	97 mm
<b>fastening method</b>	Screw fixing and standard rail mounting 35 mm
<b>fastening method</b>	
• 4-hole front mounting	No
• front mounting with central attachment	No
• rail mounting	Yes
<b>mounting position</b>	any
<b>net weight</b>	1 088 g
<b>Environmental conditions</b>	
<b>ambient temperature during operation</b>	
• minimum	-25 °C
• maximum	70 °C
<b>ambient temperature during storage</b>	
• minimum	-50 °C
• maximum	80 °C
<b>Certificates</b>	
<b>reference code according to IEC 81346-2</b>	Q
<b>Approvals Certificates</b>	
<b>General Product Approval</b>	



[Confirmation](#)





[Miscellaneous](#)


General Product Approval	Test Certificates	Marine / Shipping	other
	<a href="#">Type Test Certificates/Test Report</a>		<a href="#">Confirmation</a>

Environment
<a href="#">Environmental Confirmations</a>

Further information
<b>Information on the packaging</b> <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>
<b>Information- and Downloadcenter (Catalogs, Brochures,...)</b> <a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>
<b>Industry Mall (Online ordering system)</b> <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD3032-0NE10-0">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD3032-0NE10-0</a>
<b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b> <a href="https://support.industry.siemens.com/cs/ww/en/ps/3KD3032-0NE10-0">https://support.industry.siemens.com/cs/ww/en/ps/3KD3032-0NE10-0</a>
<b>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)</b> <a href="http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD3032-0NE10-0">http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD3032-0NE10-0</a>
<b>CAx-Online-Generator</b> <a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a>
<b>Tender specifications</b> <a href="http://www.siemens.com/specifications">http://www.siemens.com/specifications</a>

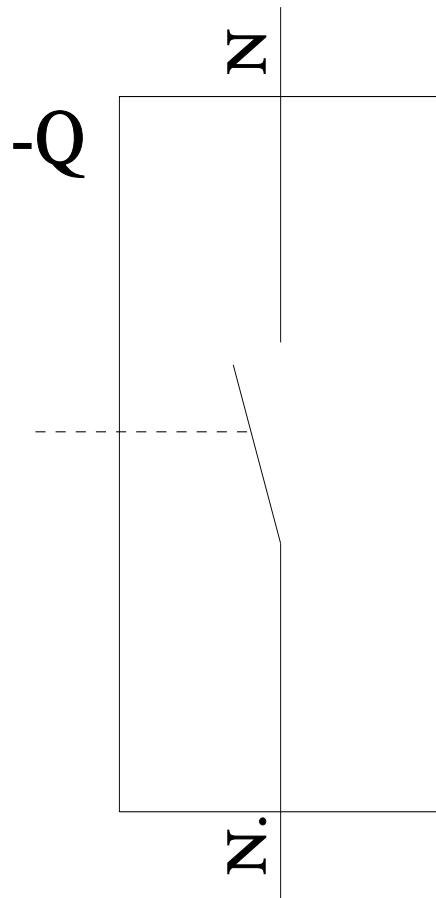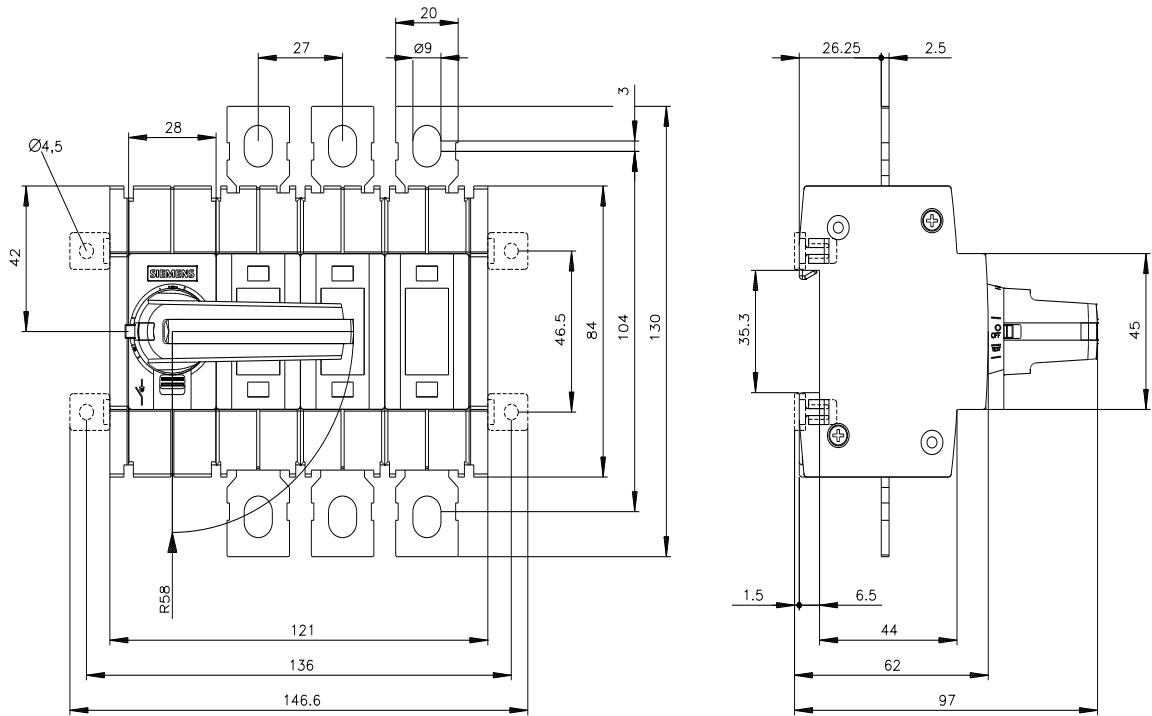

# -CR

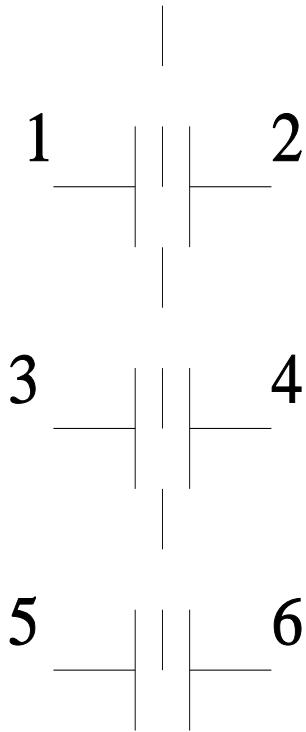

---

last modified:

8/9/2024 

