

Switch disconnector with fuse 400 A, Size 4, 3-pole for LV HRC fuse Sz. 1 and 2
Front operating mechanism left Complete unit with direct operating mechanism
gray flat terminal

Model	
product brand name	SENTRON
product designation	3KF switch disconnector with fuses
design of the product	3KF switch disconnector with fuses
product variations	3KF NH
design of the actuating element	manual operating mechanism
design of handle	Direct operating mechanism, gray
direction of actuation	from the front
type of the driving mechanism motor drive	No
number of poles	3
size of disconnecting link	2 and 1
size of switch disconnector	4
size of fuse link	NH1, NH2
mechanical service life (operating cycles) typical	8 000
electrical endurance (operating cycles)	
• at AC-23 A at 440 V	3 000
• at AC-23 A at 690 V	2 000
• at DC-23 A at 440 V	1 000
I _{2t} value	
• with closed switch for combination switch + fuse at 500 V maximum	1 205 000 A ² ·s
• with closed switch for combination switch + fuse at 400 V maximum	1 205 000 A ² ·s
• with closed switch at 690 V for combination switch + gG fuse maximum	1 300 000 A ² ·s
• of the fuse at 500 V maximum permissible	2 150 000 A ² ·s
• of the gG fuse at 690 V maximum permissible	2 600 000 A ² ·s
• of the aM fuse at 690 V maximum permissible	2 600 000 A ² ·s
position of the switch operating mechanism	left
fuse system	LV HRC fuse
overvoltage category	IV
operating voltage with current paths in series	
• with degree of pollution 2 at DC rated value	440 / 3
• with degree of pollution 3 at DC rated value	440 / 3
surge voltage resistance rated value	12 kV
Supply voltage	
operating voltage at AC rated value maximum	690 V
Protection class	
protection class IP	IP00
protection class IP	
• with closed switch with cover or cable lug cover	IP20

- on the front

IP00

Dissipation**power loss [W]**

- with conventional rated thermal current per pole 26 W
- with conventional rated thermal current per device 78 W
- with conventional rated thermal current without fuse per pole 26 W
- with conventional rated thermal current without fuse per device 78 W
- for rated value of the current at AC in hot operating state per pole 26 W
- of the fuse per fuse maximum 34 W

Main circuit

operating power at AC-23 A at 500 V rated value	280 kW
operational current rated value	400 A

Auxiliary circuit

number of connected NC contacts for auxiliary contacts	0
number of connected NO contacts for auxiliary contacts	0
number of connected CO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	8
number of NO contacts for auxiliary contacts	8
suitability for use main switch	Yes
suitability for use switch disconnector	Yes
suitability for use EMERGENCY OFF switch	No
suitability for use safety switch	Yes
suitability for use maintenance/repair switch	Yes
product feature interlock	Yes
product function phase failure monitoring	No
product component	
• voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
product feature sealable	Yes
product extension auxiliary switch	Yes
product extension optional	
• locking capability	No
• motor drive	No
• fuse monitoring	Yes
product function	
• fuse monitoring	No
• overvoltage protection monitoring	No

Short circuit

short-circuit current making capacity (Icm) for switch disconnector at 690 V AC/440 V DC without fuse link rated value minimum	24 kA
conditional short-circuit current with line-side fuse protection	
• at 500 V by gG fuse rated value	100 kA
• at 690 V by gG fuse rated value	100 kA

Connections

arrangement of electrical connectors for main current circuit	Top and bottom
tightening torque with screw-type terminals	
• minimum	30 N·m
• maximum	44 N·m
type of connectable conductor cross-sections for aluminum conductor stranded with lug	1x (6 ... 240 mm ²), 2x (6 ... 150 mm ²)
type of connectable conductor cross-sections	
• for copper busbar	1x (30 x 10 mm ²)
type of connectable conductor cross-sections for copper conductor	
• stranded with lug according to DIN 46234	1x (6 ... 240 mm ²), 2x (6 ... 150 mm ²)
• stranded with lug according to DIN 46235	1x (16 ... 185 mm ²), 2x (16 ... 150 mm ²)

type of electrical connection for main current circuit	flat connector
Mechanical Design	
height	215 mm
width	291 mm
depth	269.6 mm
fastening method	floor mounting
fastening method	
• 4-hole front mounting	No
• front mounting with central attachment	No
• rail mounting	No
mounting position	any
net weight	6 650 g

Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-50 °C
• maximum	80 °C

Approvals Certificates	
General Product Approval	



[Confirmation](#)







[Miscellaneous](#)

General Product Approval	Test Certificates	Marine / Shipping	other	Environment
	Type Test Certificates/Test Report		Confirmation	Miscellaneous

Environment	
Environmental Confirmations	

Further information	
Information on the packaging	https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...)	http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)	https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KF4340-2LF11
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	https://support.industry.siemens.com/cs/ww/en/ps/3KF4340-2LF11
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)	http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KF4340-2LF11
CAx-Online-Generator	http://www.siemens.com/cax
Tender specifications	http://www.siemens.com/specifications

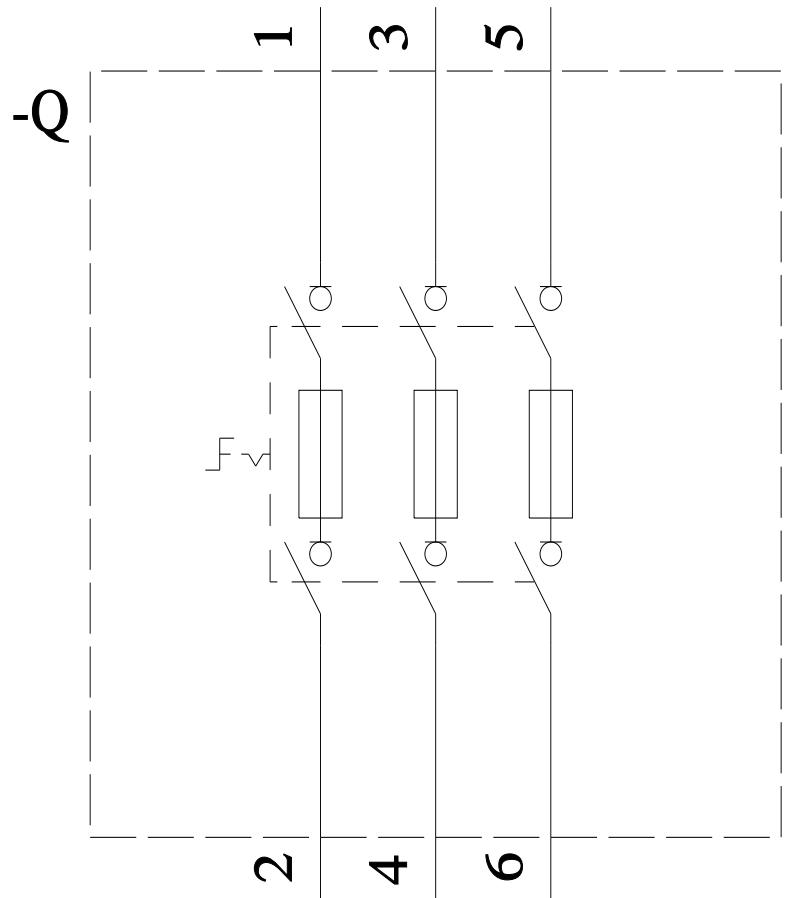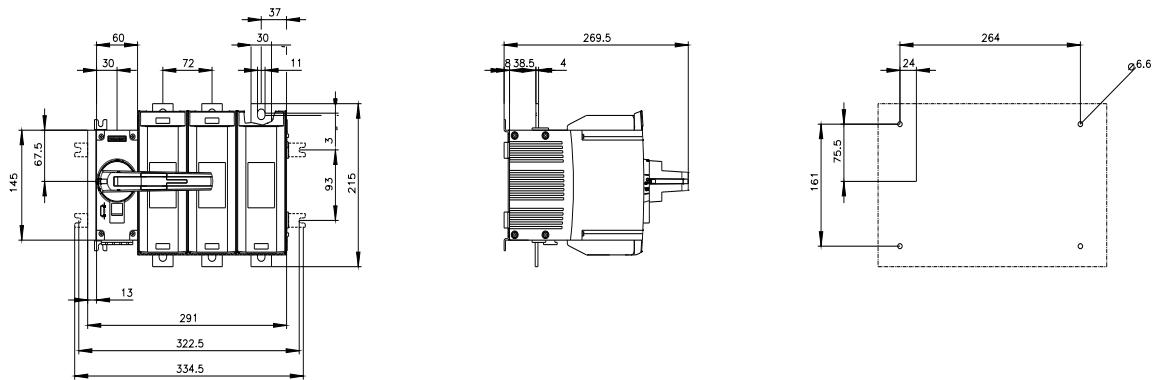

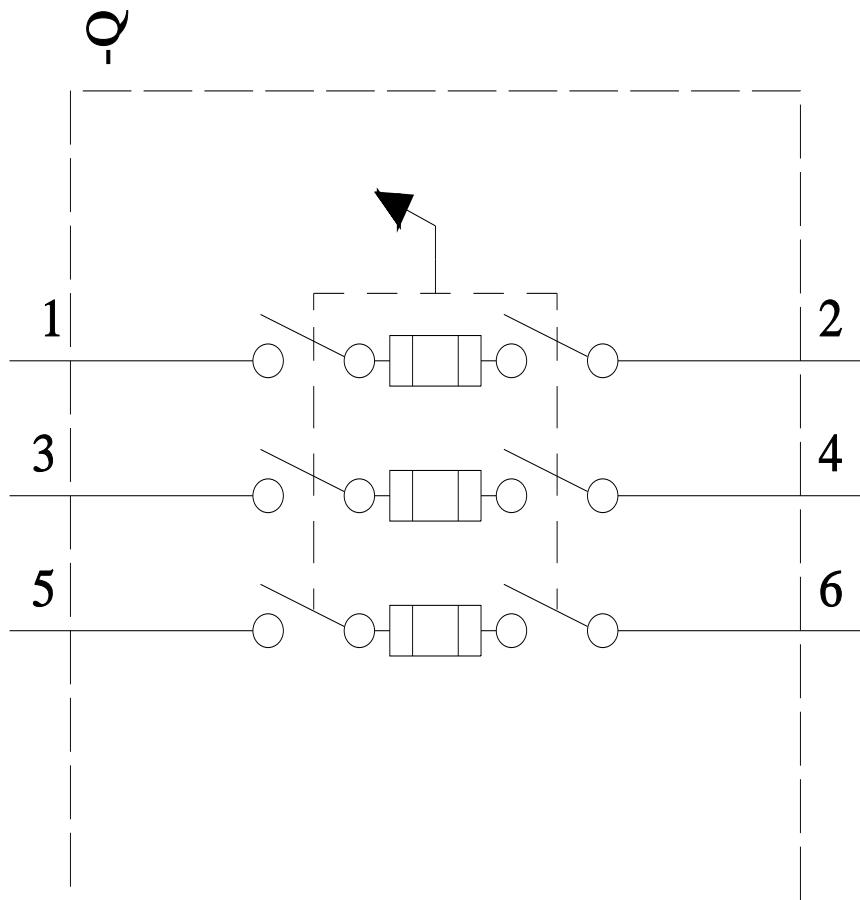

last modified:

8/2/2022

