



circular conduc. terminal TA2.3 2 x 25...150 mm² for 2 cables with auxiliary conductor voltage tap 3 units accessory for: plug-in/withdrawable unit 3VA12

Model		
product brand name		SETRON
product designation		circular conductor terminal
accessories		Wire connector
General technical data		
designation / of the terminal		TA2.3
type of electrical connection / with control wire tap		Yes
Connections according IEC		
connectable conductor cross-section		
• for copper cable / stranded / minimum		25 mm²
• for copper cable / stranded / maximum		150 mm²
• for aluminum cable / stranded / minimum		25 mm²
• for aluminum cable / stranded / maximum		150 mm²
stripped length		26 / 51 mm
tightening torque / when using copper cables		
• stranded		25 - 150 mm²: 31.1 Nm
• finely stranded		25 - 150 mm²: 31.1 Nm
Connetctions according UL		
permissible temperature / of connectable conductor / according to UL 486A-486B		75 °C
stripped length		1.0 / 2.0 in
connectable conductor cross-section		
• for copper cable / stranded / minimum		4 AWG
• for copper cable / stranded / maximum		300 kcmil
• for aluminum cable / stranded / minimum		4 AWG
• for aluminum cable / stranded / maximum		300 kcmil
Certificates		
General Product Approval		EMV
		Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping

other

Environment



[Confirmation](#)

[Miscellaneous](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9253-0JC22>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9253-0JC22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9253-0JC22

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

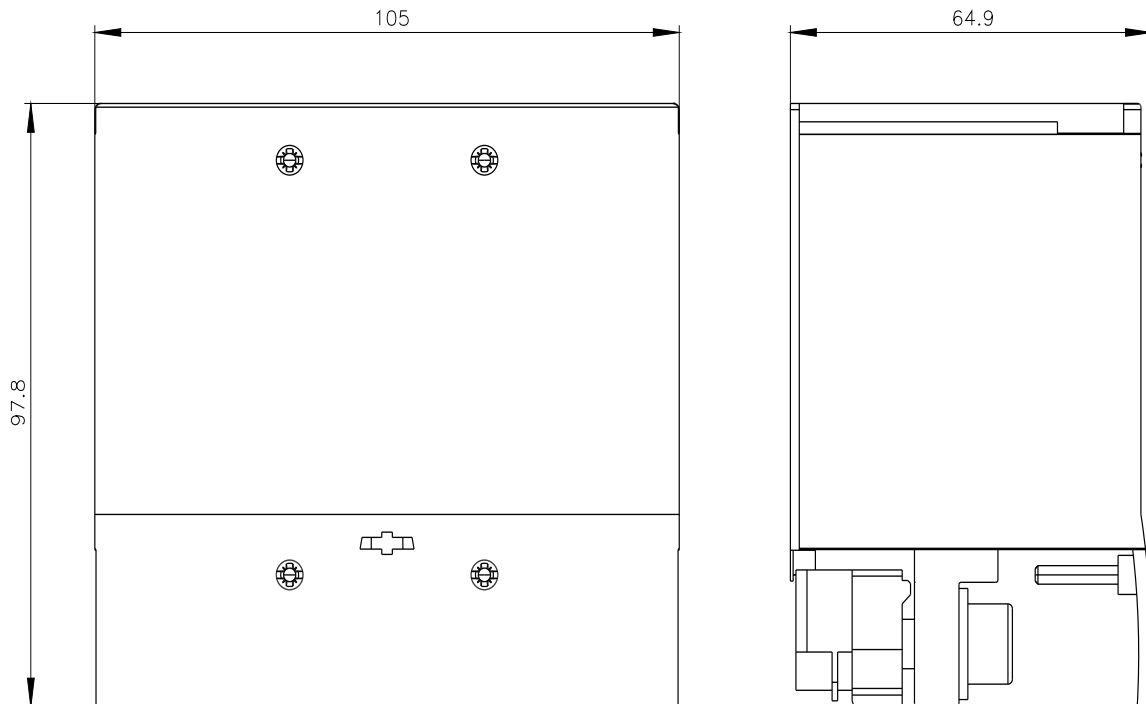

last modified:

8/9/2024 

